## **SIEMENS**

**SENTRON • SIVACON • ALPHA** 

# Low-Voltage Power Distribution and Electrical Installation Technology

Air Circuit Breakers

siemens.com/lowvoltage




## Innovative solutions for industrial controls and power distribution

Reliable components, systems and software solutions are essential in ensuring smooth power distribution in buildings and industrial plants.

With SIRIUS, SENTRON, SIVACON and ALPHA, we offer an innovative portfolio for standard-compliant and demand-oriented applications.

Efficient engineering tools and innovative cloud-based solutions can be flexibly tailored to individual requirements.

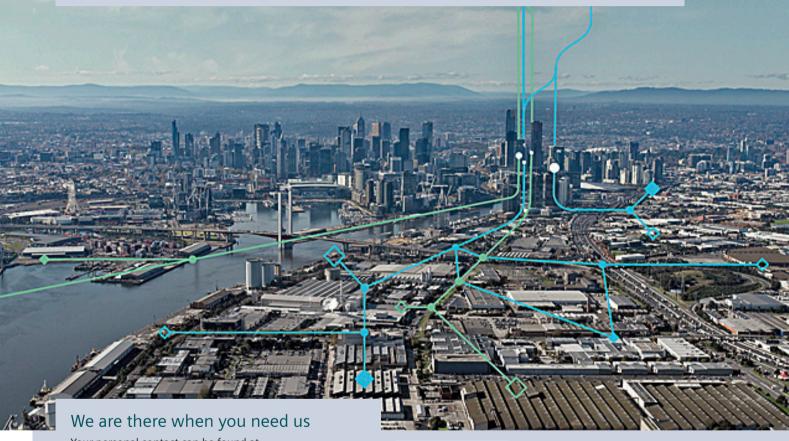

Your personal contact can be found at www.siemens.com/lowvoltage/contact

#### Catalog LV 10 · 2025

You will find the latest edition and all future editions in SiePortal at www.siemens.com/lowvoltage/catalogs

You can find the current prices in SiePortal at www.siemens.com/lowvoltage/product-catalog



The products and systems described in this catalog are manufactured/ distributed under application of a certified quality management system in accordance with EN ISO 9001 (for the Certified Registration Nos., see www.siemens.com/system-certificates/ep).

The certificate is recognized by all IQNet countries.

#### Technical specifications

The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

© Siemens 2024

## Low-Voltage Power Distribution and Electrical Installation Technology

|                                     | Introduction  | 1/2    |
|-------------------------------------|---|--------|
| Protecting                          | Air Circuit Breakers  | 1/1    |
|                                     | Molded Case Circuit Breakers  | 2/1    |
|                                     | Miniature Circuit Breakers  | 3/1    |
|                                     | Residual Current Protective Devices/Arc Fault Detection Devices (AFDDs) | 4/1    |
|                                     | Switching Devices   | 5/1    |
|                                     | Overvoltage Protection Devices  | 6/1    |
|                                     | Fuse Systems  | 7/1    |
| Protecting, Switching and Isolating | Switch Disconnectors  | 8/1    |
| Switching and Isolating             | Transfer Switching Equipment and Load Transfer Switches                 | 9/1    |
| Measuring and Monitoring            | Measuring Devices, Power Monitoring and Digitalization Solutions        | _ 10/1 |
|                                     | Monitoring Devices  | _ 11/1 |
| Distribution                        | Transformers, Power Supply Units and Socket Outlets                     | _ 12/1 |
|                                     | Busbar Systems  | _ 13/1 |
|                                     | Terminal Blocks   | _ 14/1 |
|                                     | Switchboards, Distribution Boards and Small Distribution Boards         | _ 15/1 |
|                                     | Busbar Trunking Systems   | _ 16/1 |
|                                     | System Cubicles, System Lighting and System Air-Conditioning            | _ 17/1 |
|                                     | Appendix  | A/1    |

/

4 =

Α

#### Made for makers. Simply reliable.

All power distribution systems rely on a secure infeed of electrical energy. The 3WA air circuit breaker combines all of the functions which are required of power distribution equipment in the digital companies of today: from reliably protecting people and equipment from electrical accidents and damage, to flexible application and retrofit options, a long service life and low maintenance, to innovative features for integrated e-engineering, reliable energy data recording and seamless integration into digital environments. As the central component of the electrical power distribution, the 3WA air circuit breaker provides the basis for a holistic energy system in the digital age. The 3WA air circuit breaker is also part of the Siemens Xcelerator portfolio and therefore provides support with achieving digital and sustainable transformation – faster, simpler, and scalable.

## Reliable, versatile and perfectly integrated

The 3WL air circuit breakers reliably protect electrical equipment from damage or fire resulting from short circuit, ground fault or overload failures.




#### Note

Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:



www.siemens.com/lowvoltage/SiemensEcoTech

### Air Circuit Breakers

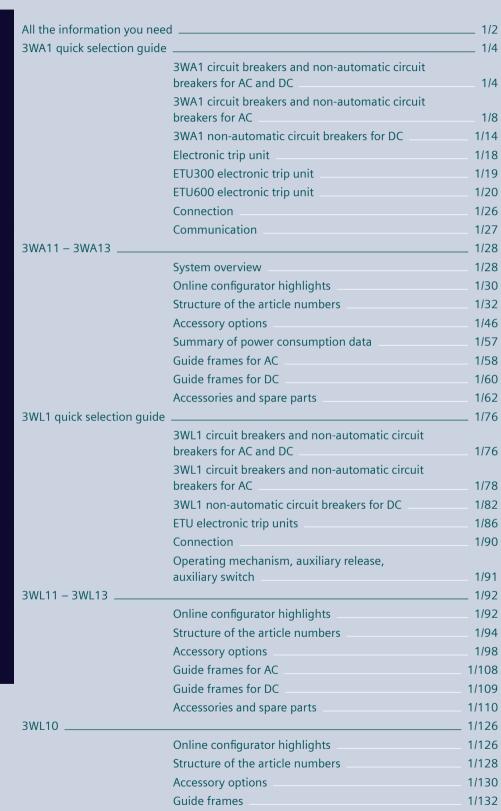

ETU electronic trip units and accessories

Accessories and spare parts



1/133

1/136

## A multitude of additional information ...

#### Information + ordering



#### All the important things at a glance

For information about air circuit breakers, please visit our website www.siemens.com/sentron-3wa



#### Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information www.siemens.com/lowvoltage/product-support

- · Quick Selection Guide
  - 3WA air circuit breakers (109781967)
  - 3WL air circuit breakers (109751638)
- Brochure
  - 3WA air circuit breakers (109800077)

The relevant tender specifications can be found at www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool



#### Siemens YouTube channel

- 3WA air circuit breaker Teaserfilm sie.ag/2Myvit
- 3WA air circuit breaker Highlightfilm sie.ag/3dy65A



#### Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

Air circuit breakers sie.aq/2|XiZjB

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number www.siemens.com/product\_catalog\_SIEP?Article No.

Order supports can be found in SiePortal at www.siemens.com/lowvoltage/product-support

- Order Support
  - 3WA air circuit breakers Made for makers.
     Simply reliable. (109800074)



#### Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your air circuit breaker at www.siemens.com/lowvoltage/3wa-configurator www.siemens.com/lowvoltage/3wl-configurator www.siemens.com/lowvoltage/3wl10-configurator

The following are additionally available for your configured air circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings



#### The fast track to the experts

#### Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at www.siemens.com/lowvoltage/components/contact

You will find further information on services at www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at www.siemens.com/support-request

## ... can be found in our online services

#### **Commissioning + operation**



#### **SENTRON Powerconfig**

The combined commissioning and service tool SENTRON Powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download SENTRON Powerconfig www.siemens.com/powerconfig

Free download SENTRON Powerconfig mobile via App Store and Play Store



#### Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the App Store and Play Store

You will find further information at

www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog) www.siemens.com/lowvoltage/product-catalog
- Image database www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at www.siemens.com/cax

#### **Manuals**

Manuals can be found in SiePortal at www.siemens.com/lowvoltage/manuals

- Equipment Manual
- 3WA1 air circuit breakers (109763061)
- 3VA27 molded case circuit breakers & 3WL10 air circuit breakers (109753821)
- System Manual
  - 3WA air circuit breaker communication (109792368)
- 3WL/3VL circuit breakers with communications capability – Modbus (39850157)
- 3WL/3VL PROFIBUS circuit breakers with communications capability – PROFIBUS (12560390)
- · Configuration Manual
  - 3WL1 air circuit breakers (35681108)
  - Low-voltage protection devices selectivity tables (109748621)
- Communication Manual
  - 3WL air circuit breakers via COM35 PROFINET IO, Modbus TCP (109757987)
  - 3WL10 air circuit breakers & 3VA27 molded case circuit breakers (109760220)

#### , Company

#### Face-to-face or online training

Our training courses can be found at www.siemens.com/sitrain-lowvoltage

- 3WA air circuit breakers (WT-LV3WA)
- 3WL10 air circuit breaker, size 0 (WT-LVA3WL0)
- 3WL air circuit breakers, sizes 1-3 (WT-LVA3WL)
- Protection systems in low-voltage power distribution (WT-LVAPS)
- Maintenance and operation of 3WA circuit breakers (LV-3WAMAIN)
- Maintenance and operation of 3WL circuit breakers (LV-3WLMAIN)
- Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBMAIN)
- Certification: Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBCERT)
- 3WL and 3WA air circuit breakers protection technology and communication (LV-COPR)

Video tutorial on the 3WL air circuit breaker www.lowvoltage.siemens.com/wcms/3wl-tutorial



#### Technical overview - Air circuit breakers



#### The fast way to get you to our online services

This page provides you with comprehensive information and links on air circuit breakers www.siemens.com/lowvoltage/product-support (109781188)

## 3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

AC

IEC 60947-2

|   |    |         | 3       | WA1       | 1          |         |           |           | 3WA1        | 2          |         |
|---|----|---------|---------|-----------|------------|---------|-----------|-----------|-------------|------------|---------|
| Basic data  |    |         |         |           |            |         |           |           |             |            |         |
| Rated operational voltage <i>U<sub>e</sub></i>                | V  |         |         | ≤ 1000    |            |         | ≤ 1150    |           |             |            |         |
| Rated current I <sub>n</sub>                                  | А  |         | 6:      | 30 25     | 00         |         | 2000 4000 |           |             |            |         |
| Size  |    |         |         | 1         |            |         |           |           | 2           |            |         |
| Type of mounting  |    | Withdra | wable   | Fi        | xed-mount  | ed      | Witl      | hdrawable |             | Fixed-mou  | inted   |
| Number of poles   |    | 3/4-р   | ole     |           | 3/4-pole   |         | 3         | 3/4-pole  |             | 3/4-po     | le      |
| Dimensions  |    |         |         |           |            |         |           |           |             |            |         |
| Width (3-pole   4-pole)                                       | mm | 320     | 410     |           | 320   410  |         | 4         | 60   590  |             | 460   59   | 90      |
| Height (for breaking capacity N, S, M, H and D   C and E)     | mm | 466     | 516     |           | 437   462  |         | 4         | 66   516  |             | 437   46   | 52      |
| Depth   | mm | 47      | 1       |           | 357        |         |           | 471       |             | 357        |         |
| Approvals   |    |         |         |           |            |         |           |           |             |            |         |
| General product approvals                                     |    |         | VDE, EA | c, ccc, c | E, C-Tick  |         |           | VDE,      | EAC, CCC, C | E, C-Tick  |         |
| Marine/shipbuilding   |    | А       | BS, DNV | , LRS, BV | , PRS, CCS |         |           | ABS, D    | NV, LRS, BV | , PRS, CCS |         |
| Breaking capacity   |    | N       | S       | М         | H new      | E       | S         | М         | Н           | С          | E       |
| Rated short-circuit breaking capacity                         |    |         |         |           |            |         |           |           |             |            |         |
| $I_{\rm cu}$   $I_{\rm cs}$ at $U_{\rm e}$ up to 415/440 V AC | kA | 55   55 | 66   66 | 85   85   | 100   100  | - -     | 66   66   | 85   85   | 100   100   | 130   130  | -1-     |
| $I_{\rm cu}$   $I_{\rm cs}$ at $U_{\rm e}$ up to 500 V AC     | kA | 55   55 | 66   66 | 85   85   | 100   100  | - -     | 66   66   | 85   85   | 100   100   | 130   130  | - -     |
| $I_{\rm cu}$   $I_{\rm cs}$ at $U_{\rm e}$ up to 690 V AC     | kA | 42   42 | 50   50 | 66   66   | 66   66    | 85   85 | 50   50   | 66   66   | 85   85     | 100   100  | 85   85 |
| $I_{\rm cu} \mid I_{\rm cs}$ at $U_{\rm e}$ up to 1000 V AC   | kA | - -     | - -     | - -       | - -        | 50 50   | - -       | - -       | - -         | - -        | 85   85 |
| $I_{cu} \mid I_{cs}$ at $U_{e}$ up to 1150 V AC               | kA | - -     | - -     | - -       | - -        | - -     | - -       | - -       | - -         | - -        | 70   70 |
| Rated short-circuit making capacity I <sub>cm</sub>           |    |         |         |           |            |         |           |           |             |            |         |
| $I_{\rm cm}$ at $U_{\rm e}$ up to 415 V AC                    | kA | 121     | 145     | 187       | 220        | -       | 145       | 187       | 220         | 286        | -       |
| $I_{\rm cm}$ at $U_{\rm e}$ up to 500 V AC                    | kA | 121     | 145     | 187       | 220        | -       | 145       | 187       | 220         | 286        | -       |
| $I_{\rm cm}$ at $U_{\rm e}$ up to 690 V AC                    | kA | 88      | 105     | 145       | 145        | 187     | 105       | 145       | 187         | 220        | 187     |
| I <sub>cm</sub> at U <sub>e</sub> up to 1000 V AC             | kA | _       | _       | _         | _          | 105     | _         | _         | _           | _          | 187     |
| I <sub>cm</sub> at U <sub>e</sub> up to 1150 V AC             | kA | -       | -       | -         |            | -       | -         | -         | -           | -          | 154     |





|              | 3WA13                                     | 3W/                                       | A12   |                |  |  |  |
|--------------|---|---|---|----------------|--|--|--|
|              |   |   |   |                |  |  |  |
|              | ≤ 1150                                    |   | ≤ 1000 (≤ 1500 for 4-pole, Breaking capacity E) |                |  |  |  |
|              | 4000 6300                                 |   | 1000 4000                                       |                |  |  |  |
|              | 3   |   | 2   | !              |  |  |  |
| Withdrawable |   | Fixed-mounted                             | Withdrawable                                    | Fixed-mounted  |  |  |  |
| 3/4-pole     |   | 3/4-pole                                  | 3/4-pole  | 3/4-pole       |  |  |  |
| 704   914    |   | 704   914                                 | 460   590                                       | 460   590      |  |  |  |
| 466   516    |   | 437   462                                 | 466   516                                       | 437   462      |  |  |  |
| 471          |   | 357                                       | 471   | 357            |  |  |  |
| 77 1         |   | 337                                       | 771   | 337            |  |  |  |
|              | VDE, EAC, CCC, CE, C-Tick                 |   | VDE, EAC, CC                                    | C, CE, C-Tick  |  |  |  |
|              | ABS, DNV, LRS, BV, PRS, CCS               |   | ABS, DNV, LRS                                   | , BV, PRS, CCS |  |  |  |
| Н            | С   | E   | D   | Е              |  |  |  |
|              |   |   |   |                |  |  |  |
| 100   100    | 150   150 (3-pole);<br>130   130 (4-pole) | -1-                                       | -1-   | -1-            |  |  |  |
| 100   100    | 150   150 (3-pole);<br>130   130 (4-pole) | - -                                       | - -   | - -            |  |  |  |
| 85   85      | 150   150 (3-pole);<br>130   130 (4-pole) | 150   150 (3-pole);<br>130   130 (4-pole) | - -   | - -            |  |  |  |
| - -          | - -                                       | 125   125                                 | - -   | - -            |  |  |  |
| - -          | - -                                       | 70   70                                   | - -   | - -            |  |  |  |
|              |   |   |   |                |  |  |  |
| 220          | 330 (3-pole);<br>286 (4-pole)             | -   | -   | -              |  |  |  |
| 220          | 330 (3-pole);<br>286 (4-pole)             | -   | -   | -              |  |  |  |
| 187          | 330 (3-pole);<br>286 (4-pole)             | 330 (3-pole);<br>286 (4-pole)             | -   | -              |  |  |  |
| -            | -   | 275                                       | -   | -              |  |  |  |
| -            | -   | 154                                       | -   | -              |  |  |  |
|              |   |   |   |                |  |  |  |

## 3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2 (continued)

**AC** 



|   |                 |    |                                    |        | TO THE REAL PROPERTY. |       |    |                                   |                                   |   |     |                                    |  |
|---|-----------------|----|------------------------------------|--------|-----------------------|-------|----|-----------------------------------|-----------------------------------|---|-----|------------------------------------|--|
|   |                 |    |                                    | 3      | WA1                   | 1     |    |                                   |                                   | 3WA12   | 2   |                                    |  |
| Breaking capacity                                   |                 |    | N                                  | S      | М                     | H new | Е  | S                                 | М                                 | Н   | С   | E                                  |  |
| Rated short-time withstand current $I_{cw}^{(1)}$   |                 |    |                                    |        |                       |       |    |                                   |                                   |   |     |                                    |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 500 V AC          | 0.5 s           | kA | 55                                 | 66     | 85                    | 85    | -  | 66                                | 85                                | 100   | 100 | -                                  |  |
|   | 1 s             | kA | 50                                 | 66     | 85                    | 85    | -  | 66                                | 85                                | 85  | 100 | _                                  |  |
|   | 2 s             | kA | 35 <sup>2)</sup> /45 <sup>3)</sup> | 45     | 70                    | 70    | -  | 66                                | 66 <sup>4)</sup> /85 <sup>5</sup> | <sup>)</sup> 66 <sup>4)</sup> /85 <sup>5)</sup> | 85  | _                                  |  |
|   | 3 s             | kA | 30 <sup>2)</sup> /35 <sup>3)</sup> | 35     | 60                    | 60    | -  | 55 <sup>4)</sup> /66 <sup>5</sup> | 55 <sup>4)</sup> /75 <sup>5</sup> | <sup>3</sup> 55 <sup>4)</sup> /75 <sup>5)</sup> | 75  | -                                  |  |
| I <sub>cw</sub> at U <sub>e</sub> up to 690 V AC    | 0.5 s           | kA | 42                                 | 50     | 66                    | 66    | 85 | 50                                | 66                                | 85  | 100 | 85                                 |  |
|   | 1 s             | kA | 42                                 | 50     | 66                    | 66    | 85 | 50                                | 66                                | 85  | 100 | 85                                 |  |
|   | 2 s             | kA | 35 <sup>2)</sup> /42 <sup>3)</sup> | 45     | 66                    | 66    | 70 | 50                                | 66                                | 66 <sup>4)</sup> /85 <sup>5)</sup>              | 85  | 66 <sup>4)</sup> /85 <sup>5)</sup> |  |
|   | 3 s             | kA | 30 <sup>2)</sup> /35 <sup>3)</sup> | 35     | 60                    | 60    | 60 | 50                                | 55 <sup>4)</sup> /66 <sup>5</sup> | <sup>3</sup> 55 <sup>4)</sup> /75 <sup>5)</sup> | 75  | 55 <sup>4)</sup> /75 <sup>5)</sup> |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 1000 V AC         | 0.5 s           | kA | -                                  | -      | _                     | -     | 50 | -                                 | -                                 | _   | -   | 85                                 |  |
|   | 1 s             | kA | -                                  | -      | -                     | -     | 50 | -                                 | -                                 | _   | -   | 85                                 |  |
|   | 2 s             | kA | -                                  | -      | -                     | -     | 50 | -                                 | -                                 | _   | -   | 66 <sup>4)</sup> /85 <sup>5)</sup> |  |
|   | 3 s             | kA | -                                  | -      | -                     | -     | 50 | -                                 | -                                 | -   | -   | 55 <sup>4)</sup> /75 <sup>5)</sup> |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 1150 V AC         | 0.5 s           | kA | -                                  | -      | _                     | -     | -  | -                                 | -                                 | _   | -   | 70                                 |  |
|   | 1 s             | kA | -                                  | -      | _                     | -     | _  | -                                 | -                                 | _   | -   | 70                                 |  |
|   | 2 s             | kA | -                                  | -      | _                     | -     | -  | -                                 | -                                 | _   | -   | 50                                 |  |
|   | 3 s             | kA | -                                  | _      | -                     | -     | _  | -                                 | -                                 | _   | -   | 50                                 |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 220 V DC          | 1 s             | kA | -                                  | -      | -                     | -     | -  | -                                 | -                                 | _   | -   | -                                  |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 300 V DC          | 1 s             | kA | -                                  | -      | _                     | -     | -  | -                                 | -                                 | -   | -   | _                                  |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 600 V DC          | 1 s             | kA | -                                  | -      | -                     | -     | -  | -                                 | -                                 | _   | -   | -                                  |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 1000 V DC         | 1 s             | kA | -                                  | -      | _                     | -     | -  | -                                 | -                                 | -   | -   | _                                  |  |
| $I_{\rm cw}$ at $U_{\rm e}$ up to 1500 V DC         | 1 s             | kA | -                                  | -      | -                     | -     | _  | -                                 | -                                 | -   | -   | -                                  |  |
| Rated conditional short-circuit current $I_{cc}$ of | f the non-autom |    | ir circuit bre                     | eakers |                       |       |    |                                   |                                   |   |     |                                    |  |
| Up to 500 V AC                                      |                 | kA | 55                                 | 66     | 85                    | -     | -  | 66                                | 85                                | 100   | 100 | -                                  |  |
| Up to 690 V AC                                      |                 | kA | 42                                 | 50     | 66                    | -     | 85 | 50                                | 66                                | 85  | 100 | 85                                 |  |
| Up to 1000 V AC                                     |                 | kA | -                                  | -      | -                     | -     | 50 | -                                 | -                                 | _   | -   | 85                                 |  |
| Up to 1150 V AC                                     |                 | kA | -                                  | _      | -                     | -     | _  | -                                 | -                                 | -   | -   | 70                                 |  |
| Up to 220 V DC                                      |                 | kA | -                                  | -      | -                     | -     | _  | -                                 | -                                 | _   | -   | _                                  |  |
| Up to 300 V DC                                      |                 | kA | -                                  | -      | -                     | -     | -  | -                                 | -                                 | _   | -   | -                                  |  |
| Up to 600 V DC                                      |                 | kA | -                                  | -      | -                     | -     | _  | -                                 | -                                 | _   | -   | -                                  |  |
| Up to 1000 V DC                                     |                 | kA | -                                  | -      | -                     | -     | -  | -                                 | -                                 | _   | -   | -                                  |  |
| Up to 1500 V DC                                     |                 | kA | -                                  | -      | -                     | -     | -  | -                                 | -                                 | _   | _   | _                                  |  |
| IT network capability                               |                 |    |                                    |        |                       |       |    |                                   |                                   |   |     |                                    |  |
| 1-pole short-circuit breaking capacity $I_{\rm IT}$ | ≤ 500 V         | kA | 50                                 | 50     | 50                    | 50    | -  | 50                                | 50                                | 50  | 50  | _                                  |  |
| acc. to IEC 60947-2 Annex H                         | ≤ 690 V         | kA | -                                  | _      | _                     | _     | 50 | -                                 | _                                 | _   | _   | 50                                 |  |
|   | 1000 V          | kA | -                                  | -      | _                     | -     | -  | -                                 | _                                 | _   | _   | _                                  |  |
|   |                 |    |                                    |        |                       |       |    |                                   |                                   |   |     |                                    |  |

<sup>&</sup>lt;sup>1)</sup> At rated operational voltage  $U_{\rm e} \ge 690$  V, the  $I_{\rm cw}$  value of the <sup>2)</sup> Size 1 with  $I_{\rm n\,max} \le 1250$  A circuit breaker corresponds to the I<sub>cu</sub>or I<sub>cs</sub>value

<sup>3)</sup> Size 1 with  $I_{n \text{ max}} \ge 1600 \text{ A}$ 

<sup>&</sup>lt;sup>4)</sup>  $I_{\text{n max}} \le 2500 \text{ A}$ <sup>5)</sup>  $I_{\text{n max}} \ge 3200 \text{ A}$ 





|              |                            |                            | Alternative Control of the Control o |                         |
|--------------|----------------------------|----------------------------|--|-------------------------|
|              | 3WA13                      |                            | 3W.  | A12                     |
| Н            | С                          | Е                          | D  | E                       |
|              | <u>'</u>                   | '                          |  |                         |
| 100          | 130 (3-pole); 120 (4-pole) | -                          | -  | -                       |
| 100          | 130 (3-pole); 120 (4-pole) | -                          | -  | -                       |
| 100          | 130 (3-pole); 120 (4-pole) | -                          | -  | -                       |
| 100          | 130 (3-pole); 120 (4-pole) | -                          | -  | -                       |
| 85           | 130 (3-pole); 120 (4-pole) | 130 (3-pole); 120 (4-pole) | -  | -                       |
| 85           | 130 (3-pole); 120 (4-pole) | 130 (3-pole); 120 (4-pole) | -  | -                       |
| 85           | 130 (3-pole); 120 (4-pole) | 130 (3-pole); 120 (4-pole) | -  | -                       |
| 85           | 130 (3-pole); 120 (4-pole) | 130 (3-pole); 120 (4-pole) | -  | -                       |
| -            | _                          | 125 (3-pole); 120 (4-pole) | -  | -                       |
| -            | _                          | 125 (3-pole); 120 (4-pole) | -  | -                       |
| -            | -                          | 125 (3-pole); 120 (4-pole) | -  | -                       |
| -            | _                          | 125 (3-pole); 120 (4-pole) | -  | -                       |
| _            | _                          | 70                         | -  | -                       |
| -            | _                          | 70                         | -  | -                       |
| -            | -                          | 70                         | -  | -                       |
| -            | _                          | 70                         | -  | -                       |
| _            | _                          | -                          | 35   | -                       |
| -            | _                          | -                          | 30   | -                       |
| -            | _                          | -                          | 25   | -                       |
| -            | _                          | -                          | -  | 20                      |
| -            | _                          | -                          | -  | - (3-pole); 20 (4-pole) |
|              |                            |                            |  |                         |
| 100          | 130 (3-pole); 120 (4-pole) | -                          | -  | -                       |
| 85           | 130 (3-pole); 120 (4-pole) | 130 (3-pole); 120 (4-pole) | -  | -                       |
| <del>-</del> | -                          | 125 (3-pole); 120 (4-pole) | -  | -                       |
| <u> </u>     | _                          | 70                         | -  | -                       |
| -            | -                          | -                          | 35   | -                       |
| -            | -                          | -                          | 30   | -                       |
| -            | _                          | -                          | 25   | -                       |
| -            | -                          | _                          | -  | 20                      |
|              | _                          | _                          |  | – (3-pole); 20 (4-pole) |
|              |                            |                            |  |                         |
| 50           | 50                         | -                          | -  | -                       |
| -            | _                          | 50                         | _  | -                       |
| _            | _                          | _                          | -  | -                       |
|              |                            |                            |  |                         |

## 3WA1 circuit breakers and non-automatic circuit breakers for AC


IEC 60947-2

| 3WA11 |  |
|-------|--|
|       |  |

Rated current In 630 A 800 A 1000 A 1250 A 1600 A 2000 A 2500 A

|                                     |           |    |  |         |  | 4 |
|-------------------------------------|-----------|----|--|---------|--|---|
| General data                        |           |    |  |         |  |   |
| Isolating function acc. to EN 60947 | 7-2       |    |  | Yes     |  |   |
| Utilization category                |           |    |  | В       |  |   |
| Permissible ambient temperature     | Operation | °C |  | -40 +70 |  | Ī |
|                                     | Storage   | °C |  | -40 +80 |  |   |

Mounting position



IP55 with cover

Degree of protection IP20 without control cabinet door, IP41 with door sealing frame,

| Voltage   |                       |      |        |
|---|-----------------------|------|--------|
| Rated operational voltage $U_{\rm e}$ at 50/60 Hz | 1000 V version        | V AC | ≤ 1000 |
| Rated insulation voltage U <sub>i</sub>           |                       | V AC | 1000   |
| Rated impulse withstand                           | Main conducting paths | kV   | 12     |
| voltage $U_{\rm imp}$                             | Auxiliary circuits    | kV   | 4      |
|   | Control circuits      | kV   | 2.5    |

| natea impaise withstana                            | man conducting paths  | *** |     |     |      |      |      |      |                    |
|--|-----------------------|-----|-----|-----|------|------|------|------|--------------------|
| voltage $U_{\rm imp}$                              | Auxiliary circuits    | kV  |     |     |      | 4    |      |      |                    |
|  | Control circuits      | kV  |     |     |      | 2.5  |      |      |                    |
| Permissible load 1)                                |                       |     |     |     |      |      |      |      |                    |
| Permissible load for withdrawal                    | ole versions          |     |     |     |      |      |      |      |                    |
| For all connection types                           | Up to 40 °C (Cu bare) | А   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | -                  |
| (except rear vertical main                         | Up to 55 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | -                  |
| connections)                                       | Up to 60 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 1930 | -                  |
|  | Up to 70 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1210 | 1490 | 1780 | -                  |
| With rear vertical connections                     | Up to 55 °C (Cu bare) | А   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500               |
|  | Up to 60 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2370               |
|  | Up to 70 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1545 | 1855 | 2060               |
| Permissible load for fixed-moun                    | ted versions          |     |     |     |      |      |      |      |                    |
| For all connection types                           | Up to 55 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | -                  |
| (except rear vertical main                         | Up to 60 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | -                  |
| connections)                                       | Up to 70 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | -                  |
| With rear vertical connections                     | Up to 55 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 <sup>2)</sup> |
|  | Up to 60 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 <sup>2)</sup> |
|  | Up to 70 °C (Cu bare) | Α   | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 <sup>2)</sup> |
| Power loss at I <sub>n</sub>                       |                       |     |     |     |      |      |      |      |                    |
| With 3-phase symmetrical load                      | Fixed-mounted         | W   | 30  | 45  | 70   | 105  | 135  | 240  | 360                |
| with maximum rated current, complete device (3/4p) | Withdrawable versions | W   | 55  | 85  | 130  | 205  | 310  | 440  | 600                |

<sup>1)</sup> The stated temperatures are the ambient temperatures of the circuit breaker

<sup>&</sup>lt;sup>2)</sup> Copper bars painted black <sup>3)</sup> Only flange connections are available <sup>4)</sup> 4000 A up to 65 °C

 $<sup>^{5)}</sup>$  For 4000 A circuit breakers with horizontal connection,  $5 \times 100 \times 10$  mm bars are required

|  |  |  | 3WA1   | 2  |  |  |  | 3WA13  |   |  |  |
|--|--|--|--|--|--|--|--|--|---|--|--|
|  |  |  |  |  |  |  |  |  |   |  |  |
| 2000 A   | 2500 A   | 3200 A   | 3600 A<br>new  | 4000 A   | 5000 A   | 6300 A   |  |  |   |  |  |
|  | _  |  | Yes  |  |  |  |  | Yes  |   |  |  |
|  |  |  | В  |  |  |  |  | В  |   |  |  |
|  |  |  | −40 +7   |  |  |  |  | -40 +70  |   |  |  |
|  |  |  | -40 +8   | 0  |  |  |  | -40 +80  |   |  |  |
|  | :  | \$ 30° \$ 30° \$   | ≤ 30° ≤ 30°  | ≥ 30° ≥ 30°<br>≥ 30° ≥ 30°<br>  Max  | 0501_20310   |  |  |  |   |  |  |
|  | IP20 with  | nout control ca  | abinet door, IF  | 41 with door s   | sealing frame,   |  | IP20 without control cabinet door, IP41 with door sealing frame, |  |   |  |  |
|  |  |  | IP55 with co   | over   |  |  |  | IP55 with cover  |   |  |  |
|  | _  |  | ≤ 1150   |  | ≤ 1150   |  |  |  |   |  |  |
|  |  |  |  |  |  |  |  |  |   |  |  |
| <u> </u>   |  |  | ≤ 1150   |  |  |  |  | ≤ 1150   |   |  |  |
|  |  |  | 12   |  |  |  |  | ≤ 1150<br>12   |   |  |  |
|  |  |  | 12<br>4  |  |  |  |  | ≤ 1150<br>12<br>4  |   |  |  |
|  |  |  | 12   |  |  |  |  | ≤ 1150<br>12   |   |  |  |
|  |  |  | 12<br>4  |  |  |  |  | ≤ 1150<br>12<br>4  |   |  |  |
| 2000   | 2500   | 3200   | 12<br>4<br>2.5   | 4000   | 4000   | 4000   | 4000   | ≤1150<br>12<br>4<br>2.5  | -   |  |  |
| 2000   | 2500   | 3020   | 12<br>4<br>2.5<br>3600 <sup>3)</sup><br>3490 <sup>3)</sup>                       | 3750   | 3750   | 3750   | 4000   | ≤1150<br>12<br>4<br>2.5  | -   |  |  |
| 2000<br>2000   | 2500<br>2500   | 3020<br>3020   | 12<br>4<br>2.5<br>3600 <sup>3)</sup><br>3490 <sup>3)</sup><br>3380 <sup>3)</sup> | 3750<br>3620   | 3750<br>3620   | 3750<br>3620   | 4000<br>4000   | ≤1150<br>12<br>4<br>2.5<br>5000<br>5000<br>5000  | -   |  |  |
| 2000<br>2000<br>2000   | 2500<br>2500<br>2280   | 3020<br>3020<br>2870   | 12<br>4<br>2.5<br>3600 <sup>3)</sup><br>3490 <sup>3)</sup>                       | 3750<br>3620<br>3360   | 3750<br>3620<br>3360   | 3750<br>3620<br>3360   | 4000<br>4000<br>4000   | ≤1150<br>12<br>4<br>2.5<br>5000<br>5000<br>5000<br>5000  | -<br>-<br>-   |  |  |
| 2000<br>2000<br>2000<br>2000   | 2500<br>2500<br>2280<br>2500   | 3020<br>3020<br>2870<br>3200   | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000   | 3750<br>3620<br>3360<br>4000   | 3750<br>3620<br>3360<br>4000   | 4000<br>4000<br>4000<br>4000                                     | ≤1150<br>12<br>4<br>2.5<br>5000<br>5000<br>5000<br>5000<br>5000  | -<br>-<br>-<br>-<br>5920                                      |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000   | 2500<br>2500<br>2280<br>2500<br>2500   | 3020<br>3020<br>2870<br>3200<br>3200   | 12<br>4<br>2.5<br>3600 <sup>3)</sup><br>3490 <sup>3)</sup><br>3380 <sup>3)</sup> | 3750<br>3620<br>3360<br>4000<br>3910   | 3750<br>3620<br>3360<br>4000<br>3910   | 3750<br>3620<br>3360<br>4000<br>3910   | 4000<br>4000<br>4000<br>4000<br>4000                             | ≤1150<br>12<br>4<br>2.5<br>5000<br>5000<br>5000<br>5000<br>5000<br>5000  | -<br>-<br>-<br>5920<br>5810                                   |  |  |
| 2000<br>2000<br>2000<br>2000   | 2500<br>2500<br>2280<br>2500   | 3020<br>3020<br>2870<br>3200   | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000   | 3750<br>3620<br>3360<br>4000   | 3750<br>3620<br>3360<br>4000   | 4000<br>4000<br>4000<br>4000                                     | ≤1150<br>12<br>4<br>2.5<br>5000<br>5000<br>5000<br>5000<br>5000  | -<br>-<br>-<br>-<br>5920                                      |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000   | 2500<br>2500<br>2280<br>2500<br>2500<br>2390   | 3020<br>3020<br>2870<br>3200<br>3200<br>2945   | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup> -    | 3750<br>3620<br>3360<br>4000<br>3910<br>3645   | 3750<br>3620<br>3360<br>4000<br>3910<br>3645   | 3750<br>3620<br>3360<br>4000<br>3910<br>3645   | 4000<br>4000<br>4000<br>4000<br>4000<br>4000                     | ≤ 1150 12 4 2.5  5000 5000 5000 5000 5000 5000 5000  | -<br>-<br>-<br>5920<br>5810<br>5500                           |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000   | 2500<br>2500<br>2280<br>2500<br>2500<br>2390   | 3020<br>3020<br>2870<br>3200<br>3200<br>2945   | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000<br>3910<br>3645   | 3750<br>3620<br>3360<br>4000<br>3910<br>3645   | 3750<br>3620<br>3360<br>4000<br>3910<br>3645   | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000             | ≤ 1150 12 4 2.5  5000 5000 5000 5000 5000 5000 5000  | -<br>-<br>-<br>5920<br>5810<br>5500                           |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>200                                  | 2500<br>2500<br>2280<br>2500<br>2500<br>2390<br>2500<br>2500                                 | 3020<br>3020<br>2870<br>3200<br>3200<br>2945<br>3200<br>3200                         | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup> -    | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000   | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000 4)  | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000                                 | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>400      | ≤ 1150 12 4 2.5  5000 5000 5000 5000 5000 5000 5000  | -<br>-<br>-<br>5920<br>5810<br>5500                           |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>200                                  | 2500<br>2500<br>2280<br>2500<br>2500<br>2500<br>2390<br>2500<br>2500<br>2500                 | 3020<br>3020<br>2870<br>3200<br>3200<br>2945<br>3200<br>3200<br>3200                 | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000                                 | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000 4)<br>3860                                    | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000                                 | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>400      | ≤ 1150 12 4 2.5  5000 5000 5000 5000 5000 5000 5000  | -<br>-<br>-<br>5920<br>5810<br>5500                           |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>200                                  | 2500<br>2500<br>2280<br>2500<br>2500<br>2500<br>2390<br>2500<br>2500<br>2500<br>2500         | 3020<br>3020<br>2870<br>3200<br>3200<br>2945<br>3200<br>3200<br>3200<br>3200         | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000   | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000 4)  | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000                                 | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>400      | ≤ 1150 12 4 2.5  5000 5000 5000 5000 5000 5000 5000  | -<br>-<br>5920<br>5810<br>5500<br>-<br>-<br>-<br>6300         |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>200                                  | 2500<br>2500<br>2280<br>2500<br>2500<br>2500<br>2390<br>2500<br>2500<br>2500                 | 3020<br>3020<br>2870<br>3200<br>3200<br>2945<br>3200<br>3200<br>3200                 | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000                                 | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000 4)<br>3860<br>4000                            | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000                         | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>400      | ≤ 1150  12  4  2.5  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000       | -<br>-<br>-<br>5920<br>5810<br>5500                           |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000 | 2500<br>2500<br>2280<br>2500<br>2500<br>2500<br>2390<br>2500<br>2500<br>2500<br>2500<br>2500 | 3020<br>3020<br>2870<br>3200<br>3200<br>2945<br>3200<br>3200<br>3200<br>3200<br>3200 | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000 | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000 4)<br>3860<br>4000<br>4000                    | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000 | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>400      | ≤ 1150  12  4  2.5  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000 | -<br>-<br>5920<br>5810<br>5500<br>-<br>-<br>-<br>6300<br>6300 |  |  |
| 2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000<br>2000 | 2500<br>2500<br>2280<br>2500<br>2500<br>2500<br>2390<br>2500<br>2500<br>2500<br>2500<br>2500 | 3020<br>3020<br>2870<br>3200<br>3200<br>2945<br>3200<br>3200<br>3200<br>3200<br>3200 | 3600 <sup>3)</sup> 3490 <sup>3)</sup> 3380 <sup>3)</sup> 3150 <sup>3)</sup>      | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000 | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000 <sup>4)</sup><br>3860<br>4000<br>4000<br>4000 | 3750<br>3620<br>3360<br>4000<br>3910<br>3645<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000 | 4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>4000<br>400      | ≤ 1150  12  4  2.5  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000  5000 | -<br>-<br>5920<br>5810<br>5500<br>-<br>-<br>-<br>6300<br>6300 |  |  |

## 3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



|   |   |                          |            |              |             | 1078 E                 |        |        |        |
|---|---|--------------------------|------------|--------------|-------------|------------------------|--------|--------|--------|
| Rated current I <sub>n</sub>                                      |   |                          | 630 A      | 800 A        | 1000 A      | 1250 A                 | 1600 A | 2000 A | 2500 A |
| Switching times   |   |                          |            |              |             |                        |        |        |        |
| Make time (mechanical)  |   | ms                       |            |              |             | 35                     |        |        |        |
| Electrical make time (through clo                                 |   | ms                       |            |              |             | 80                     |        |        |        |
| Electrical make time (through clo                                 | osing coil 5% OP)                         | ms                       |            |              |             | 50                     |        |        |        |
| Opening time (mechanical)   | -h  | ms                       |            |              |             | 38                     |        |        |        |
| Electrical opening time (through                                  |   | ms                       |            |              |             | 80                     |        |        |        |
| Electrical opening time (through Electrical opening time (through | snunt trip 5% OP)                         | ms                       |            |              |             | 50<br>80 <sup>2)</sup> |        |        |        |
| Opening time due to ETU (instan                                   |   | ms<br>ms                 |            |              |             | 50                     |        |        |        |
| Service life/endurance  | italieous siloi t-circuit release)        | 1115                     |            |              |             | 30                     |        |        |        |
| Breaking capacity N, 3/4-pole                                     |   |                          |            |              |             |                        |        |        |        |
| Mechanical  | Without maintenance                       | Operating cycles         |            |              |             | 15000                  |        |        |        |
| Weenamean   | With maintenance 1)                       | Operating cycles         |            |              |             | 30000                  |        |        |        |
| Electrical  | Without maintenance 690 V                 | Operating cycles         |            |              | 10000       | 30000                  |        | 7500   | 5000   |
| Liectrical  | With maintenance 1)                       | Operating cycles         |            |              | 10000       | 30000                  |        | 7300   | 3000   |
| Breaking capacity S, 3/4-pole                                     | With maintenance                          | Operating cycles         | _          | _            | _           | 30000                  | _      | _      |        |
| Mechanical  | Without maintenance                       | Operating cycles         |            |              |             | 15000                  |        |        |        |
| Mechanical  | With maintenance 1)                       | Operating cycles         |            |              |             | 30000                  |        |        |        |
| Floatrical  |   | Operating cycles         |            |              | 10000       | 30000                  |        | 7500   | F000   |
| Electrical  | Without maintenance 690 V                 | Operating cycles         |            |              | 10000       | 20000                  |        | 7500   | 5000   |
| D 1: 5: 50 D/4 1  | With maintenance 1)                       | Operating cycles         |            |              |             | 30000                  |        |        |        |
| Breaking capacity M, 3/4-pole                                     | Martin                                    | 0 1                      |            |              |             | 40000                  |        |        |        |
| Mechanical  | Without maintenance                       | Operating cycles         |            |              |             | 10000                  |        |        |        |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | 20000                  |        |        |        |
| Electrical  | Without maintenance 690 V                 | Operating cycles         |            |              | 10000       |                        |        | 7500   | 5000   |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | 20000                  |        |        |        |
| Breaking capacity E, 3/4-pole 3)                                  |   |                          |            |              |             |                        |        |        |        |
| Mechanical  | Without maintenance                       | Operating cycles         |            |              |             | 10000                  |        |        |        |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | 20000                  |        |        |        |
| Electrical  | Without maintenance 690 V                 | Operating cycles         |            |              | 10000       |                        |        | 7500   | 5000   |
|   | Without maintenance 1000 V                | Operating cycles         |            |              |             | 1000                   |        |        |        |
|   | Without maintenance 1150 V                | Operating cycles         |            |              |             | -                      |        |        |        |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | 20000                  |        |        |        |
| Breaking capacity H, 3/4-pole                                     |   |                          |            |              |             |                        |        |        |        |
| Mechanical  | Without maintenance                       | Operating cycles         |            |              |             | 10000                  |        |        |        |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | 20000                  |        |        |        |
| Electrical  | Without maintenance 690 V                 | Operating cycles         |            |              | 10000       |                        |        | 7500   | 5000   |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | 20000                  |        |        |        |
| Breaking capacity C, 3/4-pole                                     |   |                          |            |              |             |                        |        |        |        |
| Mechanical  | Without maintenance                       | Operating cycles         |            |              |             | -                      |        |        |        |
|   | With maintenance 1)                       | Operating cycles         |            |              |             | -                      |        |        |        |
| Electrical  | Without maintenance 690 V                 | Operating cycles         |            |              |             |                        |        |        |        |
|   | With maintenance 690 V 1)                 | Operating cycles         |            |              |             | _                      |        |        |        |
| Switching frequency (Electrical                                   |   | operating cycles         |            |              |             |                        |        |        |        |
| Breaking capacity N and S   | operating cycles)                         |                          |            |              |             |                        |        |        |        |
| breaking capacity is and 3  | 2 1                                       | 4.11                     |            |              |             | 45                     |        |        |        |
|   | 3-pole                                    | 1/h                      |            |              |             | 45<br>45               |        |        |        |
| Breaking capacity M and H   | 4-pole                                    | 1/h                      |            |              |             | 45                     |        |        |        |
| breaking capacity W and H   | 3- pole                                   | 1/h                      |            |              |             | 45                     |        |        |        |
|   |   | 1/h                      |            |              |             | 60                     |        |        |        |
| Dusaling as a situ C  | 4-pole                                    | 1/11                     |            |              |             | 00                     |        |        |        |
| Breaking capacity C   |   | 4.7                      |            |              |             |                        |        |        |        |
|   | 3-pole                                    | 1/h                      |            |              |             | -                      |        |        |        |
|   | 4-pole                                    | 1/h                      |            |              |             | -                      |        |        |        |
| Breaking capacity E 3)  |   |                          |            |              |             |                        |        |        |        |
| ≤ 690 V   | 3-pole                                    | 1/h                      |            |              |             | 45                     |        |        |        |
|   | 4-pole                                    | 1/h                      |            |              |             | 60                     |        |        |        |
| 1000 V/1150 V   | 3-pole                                    | 1/h                      |            |              |             | 20                     |        |        |        |
|   | 4-pole                                    | 1/h                      |            |              |             | 20                     |        |        |        |
| <sup>17</sup> Maintenance means: Replacing mai                    | in contact elements and arc chutes (see c | perating instructions: w | ww.siemens | .com/lowvolt | age/manuals | ).                     |        |        |        |

Maintenance means: Replacing main contact elements and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).

 $<sup>^{\</sup>rm 2)}$  Opening time with short-time delay of the undervoltage release can be set up to 200 ms

On E class circuit breakers, the main contact elements can only be replaced in the factory

3WA12 3WA13





| 2000 A | 2500 A | 3200 A           | 3600 A new | 4000 A | 4000 A | 5000 A           | 6300 A |
|--------|--------|------------------|------------|--------|--------|------------------|--------|
|        |        | 35               |            |        |        | 35               |        |
|        |        | 80               |            |        |        | 100              |        |
|        |        | 50               |            |        |        | 50               |        |
|        |        | 34<br>80         |            |        |        | 34<br>73         |        |
|        |        | 50               |            |        |        | 50               |        |
|        |        | 80 <sup>2)</sup> |            |        |        | 80 2)            |        |
|        |        | 50               |            |        |        | 50               |        |
|        |        |                  |            |        |        |                  |        |
|        |        | -                |            |        |        | -                | _      |
|        |        | _                |            |        |        | _                |        |
|        |        | _                |            |        |        | _                |        |
|        |        | -                |            |        |        | -                |        |
|        |        |                  |            |        |        |                  |        |
|        |        | 10000            |            |        |        | -                |        |
| 7500   | 7500   | 20000<br>4000    | 2000       | 2000   |        |                  |        |
| 7300   | 7300   | 20000            | 2000       | 2000   |        |                  |        |
|        |        | 20000            |            |        |        |                  |        |
|        |        | 10000            |            |        |        | -                |        |
|        |        | 20000            |            |        |        | -                |        |
| 7500   | 7500   | 4000             | 2000       | 2000   |        | -                |        |
|        |        | 20000            |            |        |        | -                |        |
|        |        | 10000            |            |        |        | 5000             |        |
|        |        | 20000            |            |        |        | 10000            |        |
| 7500   | 7500   | 4000             | 2000       | 2000   |        | 1000             |        |
|        |        | 1000             |            |        |        | 1000             |        |
|        |        | 500              |            |        |        | 500              |        |
|        |        | 20000            |            |        |        | 10000            |        |
|        |        | 10000            |            |        |        | 7500             | _      |
|        |        | 20000            |            |        |        | 15000            |        |
| 7500   | 7500   | 4000             | 2000       | 2000   |        | 2000             |        |
| 20000  | 20000  | 20000            | 20000      | 20000  |        | 15000            |        |
|        |        |                  |            |        |        |                  |        |
| 5000   | 5000   | 5000             | -          | -      |        | 5000             |        |
| 10000  | 10000  | 10000            | -          | -      |        | 10000            |        |
| 5000   | 5000   | 4000             | -          | -      |        | 1000             |        |
| 10000  | 10000  | 10000            | -          | -      |        | 10000            |        |
|        |        |                  |            |        |        |                  |        |
|        |        | 45 <sup>4)</sup> |            |        |        | -                |        |
|        |        | 60 <sup>4)</sup> |            |        |        | -                |        |
|        |        |                  |            |        |        |                  |        |
|        |        | 45               |            |        |        | 60 <sup>5)</sup> |        |
|        |        | 60               |            |        |        | 60 <sup>5)</sup> |        |
|        | 60     |                  |            |        |        | 60               |        |
|        | 60     |                  |            |        |        | 60               |        |
|        | 00     |                  |            |        |        |                  |        |
|        |        | 45               |            |        |        | 60               |        |
|        |        | 60               |            |        |        | 60               |        |
|        |        | 20               |            |        |        | 20               |        |
| Δ = 11 |        | 20               |            |        |        | 20               |        |

Breaking capacity N not available in frame size 2
 Breaking capacity N not available in frame size 3

## 3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



|                                 |  |                              |   |                         |             | LOTTE TO               |                          |                         |   |  |
|---------------------------------|--|------------------------------|---|-------------------------|-------------|------------------------|--------------------------|-------------------------|---|--|
| Rated current I <sub>n</sub>    |  |                              | 630 A                                   | 800 A                   | 1000 A      | 1250 A                 | 1600 A                   | 2000 A                  | 2500 A  |  |
| Connection                      |  |                              |   |                         |             |                        |                          |                         |   |  |
| Minimum main conductor cross    | -sections (horizontal, front and fla             | nge connection)              |   |                         |             |                        |                          |                         |   |  |
| Copper bars, Cu, bare           |  | $Unit \times mm \times mm$   | 1 × 40 × 10                             | 1 × 50 × 10             | 1 × 60 × 10 | 2 × 40 × 10            | $02 \times 50 \times 10$ | $3 \times 50 \times 10$ | 4 × 50 × 10   |  |
|                                 |  |                              |   |                         |             |                        |                          |                         |   |  |
| Copper bars, Cu, painted black  |  | Unit × mm × mm               | 1 × 40 × 10                             | 1 v 50 v 10             | 1 v 60 v 10 | 2 ~ 40 ~ 10            | 12 v 50 v 10             | 12 v 50 v 10            | 1 v 50 v 10   |  |
| copper bars, cu, painted black  |  | Offic × Hilli × Hilli        | 1 × 40 × 10                             | 1 × 30 × 10             | 1 × 00 × 10 | 2 ^ 40 ^ 10            | )2 × 30 × 10             | /3 × 30 × 10            | 4 × 30 × 10   |  |
|                                 |  |                              |   |                         |             |                        |                          |                         |   |  |
| Minimum main conductor cross    | -sections (vertical connection)                  |                              |   |                         |             |                        |                          |                         |   |  |
| Copper bars, Cu, bare           |  | $Unit \times mm \times mm$   | $1 \times 40 \times 10$                 | $1 \times 50 \times 10$ | 1 × 60 × 10 | 2 × 40 × 10            | 2 × 50 × 10              | $3 \times 50 \times 10$ | $4 \times 100 \times 5$                             |  |
|                                 |  |                              |   |                         |             |                        |                          |                         | $2 \times 100 \times 10$                            |  |
| Common have Commonted block     |  | Units and                    | 1 40 10                                 | 1 50 10                 | 1 (0 10     | 2 40 10                | 2 50 10                  | 2 50 10                 | 4 100 F   |  |
| Copper bars, Cu, painted black  |  | Unit $\times$ mm $\times$ mm | 1 × 40 × 10                             | 1 × 50 × 10             | 1 × 60 × 10 | 2 × 40 × 10            | 2 × 50 × 10              | 3 × 50 × 10             | $4 \times 100 \times 5$<br>$2 \times 100 \times 10$ |  |
|                                 |  |                              |   |                         |             |                        |                          |                         | 2 × 100 × 10  |  |
| Auxiliary conductor (Cu) max. n | number of auxiliary conductors × c               | ross-section (solic          | d/stranded)                             |                         |             |                        |                          |                         |   |  |
| Standard connection = push-in   | Without end sleeve                               |                              |   |                         | 2 × 0.5 2   | .5 mm² (AV             | VG 20 14                 | )                       |   |  |
| ·                               | With end sleeve acc. to DIN 4622                 | 8 Part 1                     | 2 × 0.5 2.5 mm² (AWG 20 14)             |                         |             |                        |                          |                         |   |  |
|                                 | With end sleeve acc. to DIN 4622                 | 8 Part 4                     | 2 × 0,5 2,5 mm <sup>2</sup> (AWG 20 14) |                         |             |                        |                          |                         |   |  |
|                                 | With twin end sleeve                             |                              |   |                         | 2 × 0.5 1   | .5 mm <sup>2</sup> (AV | VG 20 16                 | )                       |   |  |
|                                 | Stripped length                                  |                              |   |                         | 10 11 n     | nm (0,39               | 0,43 inch)               |                         |   |  |
| Optional connection             | Without end sleeve                               |                              | 2 × 0,                                  | 5 1,5 mn                | n² (AWG 20  | 16)/1 × 0              | ),5 2,5 m                | m² (AWG 20              | 14)   |  |
| with screw connection           | With end sleeve acc. to DIN 46228                | 8 Part 1                     | 2 × 0,                                  | 5 1,5 mn                | n² (AWG 20  | 16)/1 × 0              | ),5 2,5 m                | m² (AWG 20              | 14)   |  |
|                                 | With end sleeve acc. to DIN 46228 Part 4         |                              | 1 × 0,5 1,5 mm <sup>2</sup> (AWG 20 16) |                         |             |                        |                          |                         |   |  |
|                                 | With twin end sleeve                             |                              | 1 × 0.5 1.5 mm <sup>2</sup> (AWG 20 16) |                         |             |                        |                          |                         |   |  |
|                                 | Stripped length                                  |                              | 7 8 mm (0.28 0.31 inch)                 |                         |             |                        |                          |                         |   |  |
| Position signaling switch modu  | l  |                              |   |                         |             |                        |                          |                         |   |  |
| Spring-loaded terminals for     | Without end sleeve                               |                              |   |                         | 0,2 2,5     | mm² (AWG               | 3 28 12)                 |                         |   |  |
| standard signaling contacts     | With end sleeve acc. to DIN 46228                | 8 Part 4                     | 0,25 1,5 mm² (AWG 20 16)                |                         |             |                        |                          |                         |   |  |
|                                 | Stripped length                                  |                              |   |                         |             | m (0.2 0               |                          |                         |   |  |
| Push-in connection for          | Solid  |                              |   |                         | 0,5 2,5     | mm² (AWC               | 3 20 12)                 |                         |   |  |
| standard signaling contacts     | With end sleeve                                  |                              |   |                         |             | mm² (AWC               |                          |                         |   |  |
|                                 | Stripped length                                  |                              |   |                         |             | nm (0,39               |                          |                         |   |  |
| Push-in connection for          | Solid  |                              |   |                         |             | mm² (AWG               |                          |                         |   |  |
| COM signaling contacts          | With end sleeve                                  |                              |   |                         |             | mm² (AWC               |                          |                         |   |  |
|                                 | Stripped length                                  |                              |   |                         | 10 12 n     | nm (0,39               | 0,47 inch)               |                         |   |  |
| Weights 1)                      |  |                              | 20.5                                    | 20.5                    | 20.5        | 40.5                   | 40.5                     | 40.5                    | 10.5  |  |
| 3-pole                          | Fixed-mounted circuit breaker                    | kg                           | 38.5                                    | 38.5                    | 38.5        | 42.5                   | 42.5                     | 43.5                    | 43.5  |  |
|                                 | Withdrawable circuit breaker without guide frame | kg                           | 39                                      | 39                      | 39          | 40                     | 40                       | 41                      | 41  |  |
|                                 | Guide frames                                     | kg                           | 26                                      | 26                      | 26          | 27                     | 27                       | 29                      | 29  |  |
| 4-pole                          | Fixed-mounted circuit breaker                    | kg                           | 47                                      | 47                      | 47          | 52                     | 52                       | 53                      | 53  |  |
|                                 | Withdrawable circuit breaker without guide frame | kg                           | 45                                      | 45                      | 45          | 46                     | 46                       | 47                      | 47  |  |
|                                 | Guide frames                                     | kg                           | 30                                      | 30                      | 30          | 32                     | 32                       | 34                      | 34  |  |
|                                 |  |                              |   |                         |             |                        |                          |                         |   |  |

<sup>•</sup> Breakers with the lowest breaking capacity in each case (size 1: breaking capacity N, size 2: breaking capacity S, size 3: breaking capacity H)
• Breakers with ETU600 (LSI)

Fixed-mounted circuit breakers/guide frames with vertical connections

Guide frame with position signaling switch

<sup>•</sup> Without any other accessories

3WA12 3WA13





| 2000 A  | 2500 A                                  | 3200 A                        | 3600 A new                  | 4000 A                                | 4000 A                                | 5000 A                           | 6300 A                                |  |
|---|---|-------------------------------|-----------------------------|---------------------------------------|---------------------------------------|----------------------------------|---------------------------------------|--|
|   |   |                               |                             |                                       |                                       |                                  |                                       |  |
|   |   |                               |                             |                                       |                                       |                                  |                                       |  |
| $3 \times 100 \times 5$<br>(3 × 50 × 10)<br>2 × 80 × 10 | 2 × 100 × 10                            | 3 × 100 × 10                  | 5 × 100 × 10 ¹)             | 5 × 100 × 10                          | 4 × 100 × 10                          | 6 × 100 × 10                     | -                                     |  |
| $3 \times 100 \times 5$<br>(3 × 50 × 10)<br>2 × 80 × 10 | 2 × 100 × 10                            | 3 × 100 × 10                  | 5 × 100 × 10 <sup>1)</sup>  | 5 × 100 × 10                          | 4 × 100 × 10                          | 6 × 100 × 10                     | -                                     |  |
|   |   |                               |                             |                                       |                                       |                                  |                                       |  |
| $3 \times 100 \times 5$<br>(3 × 50 × 10)<br>2 × 80 × 10 | 2 × 100 × 10                            | 3 × 100 × 10                  | -                           | 4 × 120 × 10                          | 4 × 100 × 10                          | 6 × 100 × 10                     | 6 × 120 × 10                          |  |
| 3 × 100 × 5<br>(3 × 50 × 10)<br>2 × 80 × 10             | 2 × 100 × 10                            | 3 × 100 × 10                  | -                           | 4 × 120 × 10                          | 4 × 100 × 10                          | 6 × 100 × 10                     | 6 × 120 × 10                          |  |
|   |   |                               |                             |                                       |                                       |                                  |                                       |  |
|   | 2 × 0.5                                 | 2.5 mm <sup>2</sup> (AWG 2    | 14)                         |                                       | 2 × 0                                 | .5 2.5 mm <sup>2</sup> (AWG 20 . | 14)                                   |  |
|   | 2 × 0.5                                 | 2.5 mm <sup>2</sup> (AWG 2    | 20 14)                      |                                       | 2 × 0                                 | .5 2.5 mm <sup>2</sup> (AWG 20 . | 14)                                   |  |
|   |   | 2,5 mm <sup>2</sup> (AWG 2    |                             |                                       |                                       | ,5 2,5 mm² (AWG 20 .             | · · · · · · · · · · · · · · · · · · · |  |
|   |   | 1.5 mm <sup>2</sup> (AWG 2    |                             |                                       |                                       | .5 1.5 mm <sup>2</sup> (AWG 20 . |                                       |  |
|   | 10 11 mm (0,39 0,43 inch)               |                               |                             | 10 11 mm (0,39 0,43 inch)             |                                       |                                  |                                       |  |
|   |   |                               | 2,5 mm <sup>2</sup> (AWG 20 | · · · · · · · · · · · · · · · · · · · |                                       | VG 20 16)/1 × 0,5 2              |                                       |  |
| 2 × 0,  |   |                               | 2,5 mm <sup>2</sup> (AWG 20 | 14)                                   |                                       | VG 20 16)/1 × 0,5 2              |                                       |  |
|   | 1 × 0,5 1,5 mm² (AWG 20 16)             |                               |                             |                                       |                                       | ,5 1,5 mm² (AWG 20 .             | 16)                                   |  |
|   | 1 × 0.5 1.5 mm <sup>2</sup> (AWG 20 16) |                               |                             |                                       |                                       | .5 1.5 mm <sup>2</sup> (AWG 20 . | 16)                                   |  |
|   | 7 8                                     | 8 mm (0.28 0.31               | inch)                       |                                       | 7.                                    | 8 mm (0.28 0.31 in               | ch)                                   |  |
|   | 0.2                                     | . 2,5 mm² (AWG 28             | 12)                         |                                       | 0,2                                   | 2,5 mm² (AWG 28                  | 12)                                   |  |
|   |   | 1,5 mm² (AWG 20               |                             |                                       | · · · · · · · · · · · · · · · · · · · | 5 1,5 mm² (AWG 20                | · · · · · ·                           |  |
|   |   | 6 mm (0.2 0.24                |                             |                                       |                                       | 6 mm (0.2 0.24 inc               |                                       |  |
|   |   | . 2,5 mm² (AWG 20             |                             |                                       |                                       | 2,5 mm² (AWG 20                  |                                       |  |
|   | 0,5                                     | . 1,5 mm² (AWG 20             | 16)                         |                                       | 0,5                                   | 1,5 mm² (AWG 20                  | 16)                                   |  |
|   | 10                                      | 12 mm (0,39 0,4               | 7 inch)                     |                                       | 10.                                   | 12 mm (0,39 0,47 i               | nch)                                  |  |
|   |   | . 2,5 mm <sup>2</sup> (AWG 20 |                             |                                       |                                       | 2,5 mm² (AWG 20                  |                                       |  |
|   |   | . 1,5 mm² (AWG 20             |                             |                                       |                                       | 1,5 mm² (AWG 20                  |                                       |  |
|   | · · · · · · · · · · · · · · · · · · ·   | 12 mm (0,39 0,4               |                             |                                       | · · · · · · · · · · · · · · · · · · · | 12 mm (0,39 0,47 i               |                                       |  |
| 55  | 57                                      | 69                            | On request                  | 77                                    | 113                                   | 115                              | 115                                   |  |
| 52  | 54                                      | 59                            | On request                  | 59                                    | 91                                    | 92                               | 92                                    |  |
|   |   |                               |                             |                                       |                                       |                                  |                                       |  |
| 33.5  | 35.5                                    | 36.5                          | On request                  | 40                                    | 85.5                                  | 87                               | 87                                    |  |
| 68.5  | 71.5                                    | 86.5                          | On request                  | 97.5                                  | 147.5                                 | 149.5                            | 149.5                                 |  |
| 63.5  | 66                                      | 73                            | On request                  | 73                                    | 115.5                                 | 116.5                            | 116.5                                 |  |
| 40  | 42.5                                    | 51.5                          | On request                  | 53                                    | 103.5                                 | 105.5                            | 105.5                                 |  |
|   |   |                               |                             |                                       |                                       |                                  |                                       |  |

## 3WA1 non-automatic circuit breakers for DC

IEC 60947-2





| Rated current I <sub>n</sub>                            |  |                  | 1000 A              | 2000 A                                       | 4000 A                  |
|---|--|------------------|---------------------|--|-------------------------|
| General data  |  |                  | 1000 A              | 2000 A                                       | 7000 A                  |
| Isolating function acc. to EN 60947-2                   |  |                  |                     | Yes  |                         |
| Utilization category                                    |  |                  |                     | В  |                         |
| Permissible ambient temperature                         | During operation (in operation                               | °C               |                     | -40 +70                                      |                         |
| remissible ambient temperature                          | with LCD max. 55 °C)   | C                |                     | 40 170                                       |                         |
|   | Storage  | °C               |                     | -40 +80                                      |                         |
| Mounting position                                       |  |                  |                     | CIE CIE                                      |                         |
|   |  |                  | ≤ 30° ≤ 30°         | 30° < 30°                                    | 201_20310               |
| Degree of protection                                    |  |                  | IP20 without contro | l cabinet door, IP41 with<br>IP55 with cover | door sealing frame,     |
| Voltage   |  |                  |                     |  |                         |
| Rated operational voltage $U_{\rm e}$                   | Breaking capacity D   E                                      | V DC             | 600                 | 1000 (3-pole); 1500 (4                       | -pole)                  |
| Rated insulation voltage <i>U</i> <sub>i</sub>          | Breaking capacity D   E                                      | V DC             |                     | 1000 (3-pole); 1500 (4                       |                         |
| Rated impulse withstand voltage                         | Main conducting paths  | kV               |                     | 12   | p,                      |
| $U_{\rm imp}$   | Auxiliary circuits   | kV               |                     | 4  |                         |
|   | Control circuits   | kV               |                     | 2.5  |                         |
| Permissible load  |  |                  |                     |  |                         |
| Permissible load for withdrawable v                     | versions   |                  |                     |  |                         |
| For all connection types (except rear                   | Up to 40 °C (Cu bare)  | А                | 1000                | 2000   | 4000                    |
| vertical main connections)                              | Up to 55 °C (Cu bare)  | Α                | 1000                | 2000   | 3640                    |
|   | Up to 60 °C (Cu bare)  | A                | 1000                | 2000   | 3500                    |
|   | Up to 70 °C (Cu bare)  | A                | 1000                | 1950   | 3250                    |
| With rear vertical connections                          | Up to 40 °C (Cu bare)  | A                | 1000                | 2000   | 4000                    |
|   | Up to 55 °C (Cu bare)  | Α                | 1000                | 2000   | 4000                    |
|   | Up to 60 °C (Cu bare)  | Α                | 1000                | 2000   | 3640                    |
|   | Up to 70 °C (Cu bare)  | А                | 1000                | 2000   | 3400                    |
| Permissible load for fixed-mounted                      | versions   |                  |                     |  |                         |
| For all connection types (except rear                   | Up to 40 °C (Cu bare)  | А                | 1000                | 2000   | 4000                    |
| vertical main connections)                              | Up to 55 °C (Cu bare)  | A                | 1000                | 2000   | 4000                    |
|   | Up to 60 °C (Cu bare)  | Α                | 1000                | 2000   | 4000                    |
|   | Up to 70 °C (Cu bare)  | A                | 1000                | 2000   | 3900                    |
| With rear vertical connections                          | Up to 40 °C (Cu bare)  | Α                | 1000                | 2000   | 4000                    |
|   | Up to 55 °C (Cu bare)  | А                | 1000                | 2000   | 4000                    |
|   | Up to 60 °C (Cu bare)  | A                | 1000                | 2000   | 4000                    |
| 5   | Up to 70 °C (Cu bare)  | А                | 1000                | 2000   | 4000                    |
| Power loss at I <sub>n</sub>                            | With draws his consists 2 /4 male                            |                  | 1701220             | 220   420                                    | 750   1000              |
| With 3-phase symmetrical load, complete device (3/4p)   | Withdrawable versions 3-/4-pole                              | e W<br>W         | 170   220           | 320   420                                    | 750   1000<br>500   660 |
| Switching times   | Fixed-mounted 3-/4-pole                                      | VV               | 130   190           | 240   360                                    | 500   660               |
| Make time (mechanical)                                  |  | ms               | 35                  | 35   | 35                      |
| Electrical make time (through closing                   | coil 100% OP)  | ms               | 80                  | 80   | 80                      |
| Electrical make time (through closing                   |  | ms               | 50                  | 50   | 50                      |
| Opening time (mechanical)                               |  | ms               | 34                  | 34   | 34                      |
| Electrical opening time (through shur                   | nt trip 100% OP)   | ms               | 80                  | 80   | 80                      |
|   | Electrical opening time (through shunt trip 100% OP)  ms  ms |                  |                     |  | 50                      |
| Electrical opening time (über undervo                   |  | ms               | 50<br>80 ¹)         | 50<br>80 ¹)                                  | 80 1)                   |
| Service life/endurance<br>Breaking capacity D, 3/4-pole |  |                  |                     |  |                         |
| Mechanical  | Without maintenance  | Operating cycles | 10000               | 10000  | 10000                   |
|   | With maintenance 1)  | Operating cycles | 20000               | 20000  | 20000                   |
| Electrical  | Without maintenance 600 V                                    | Operating cycles | 6000                | 6000   | 4000                    |
|   | With maintenance 1)  | Operating cycles | 20000               | 20000  | 20000                   |

 $<sup>^{\</sup>mbox{\scriptsize 1)}}$  Opening time with short-time delay of the undervoltage release can be set up to 200 ms

#### 3WA12



| Rated current I <sub>n</sub>        |   |                       | 1000 A   | 2000 A                          | 4000 A        |  |  |
|-------------------------------------|---|-----------------------|--|---------------------------------|---------------|--|--|
| Service life/endurance              |   |                       |  |                                 |               |  |  |
| Breaking capacity E, 3/4-pole       |   |                       |  |                                 |               |  |  |
| Mechanical                          | Without maintenance                       | Operating cycles      | 10000  | 10000                           | 10000         |  |  |
|                                     | With maintenance 1)                       | Operating cycles      | 20000  | 20000                           | 20000         |  |  |
| Electrical                          | Without maintenance 1000 V                | Operating cycles      | 1000   | 1000                            | 1000          |  |  |
|                                     | With maintenance 1)                       | Operating cycles      | 20000  | 20000                           | 20000         |  |  |
| Breaking capacity E, 4-pole         |   |                       |  |                                 |               |  |  |
| Electrical                          | Without maintenance 1500 V 2)             | Operating cycles      | 1000   | 1000                            | 1000          |  |  |
|                                     | With maintenance 1)                       | Operating cycles      | 20000  | 20000                           | 20000         |  |  |
| Switching frequency (Electrical ope | erating cycles)                           |                       |  |                                 |               |  |  |
| Breaking capacity D                 |   |                       |  |                                 |               |  |  |
|                                     | 3- and 4-pole                             | 1/h                   | 45/60  | 45/60                           | 45/60         |  |  |
| Breaking capacity E                 |   |                       |  |                                 |               |  |  |
|                                     | 3- and 4-pole 3)                          | 1/h                   | 20/20  | 20/20                           | 20/20         |  |  |
| Connection                          |   |                       |  |                                 |               |  |  |
| Minimum cross-sections of main co   | onductor bars (infeed and load co         | nnections)            |  |                                 |               |  |  |
| Copper bars, bare or painted black  |   | Unit × mm × mm        | 1 × 60 × 10  | 3 × 100 × 5;                    | 4 × 100 × 10  |  |  |
| copper bars, bare or paritied black |   | Offic × Hilli × Hilli | 1 × 00 × 10  | 2 × 80 × 10                     | 4 × 100 × 10  |  |  |
| Minimum cross-sections of main co   | anductor hars (note strans) 4)            | _                     |  | 2 × 00 × 10                     |               |  |  |
| Copper bars, bare or painted black  | madetor bars (pore straps)                | Unit × mm × mm        | 1 × 100 × 10;  | 2 × 100 × 5;                    | 3 × 100 × 10; |  |  |
| copper surs, sure or purities stack |   | Onic x min x min      | (2 × 100 × 5)  | $(2 \times 100 \times 3)$       | vertikal      |  |  |
| Auxiliary conductor (Cu) max. num   | ber of auxiliary conductors x cros        | s-section (solid/str  |  | (2 × 100 × 10)                  | vertikui      |  |  |
| Standard connection = push-in       | Without end sleeve                        | 3 Section (Sonarsti   |  | .5 2.5 mm² (AWG 20              | 14)           |  |  |
| Standard connection – pasir in      | With end sleeve acc. to DIN 4622          | 78 Part 1             |  | 1.5 2.5 mm² (AWG 20             |               |  |  |
|                                     | With end sleeve acc. to DIN 4622          |                       |  | 1,5 2,5 mm² (AWG 20             |               |  |  |
|                                     | With twin end sleeve                      | 2014114               |  | 1.5 1.5 mm <sup>2</sup> (AWG 20 |               |  |  |
|                                     |   |                       |  |                                 |               |  |  |
|                                     | Stripped length                           |                       | 10 11 mm (0,39 0,43 inch)                                  |                                 |               |  |  |
| Optional connection with screw      | Without end sleeve                        |                       |  | ,5 1,5 mm <sup>2</sup> (AWG 20  |               |  |  |
| connection                          | With end sleeve acc. to DIN 4622          | 20 D 1                | 1 × 0,5 2,5 mm² (AWG 2014)<br>2 × 0,5 1,5 mm² (AWG 20 16)/ |                                 |               |  |  |
|                                     | With end sleeve acc. to DIN 462.          | 28 Part I             | 2 × 0,5 1,5 mm² (AWG 20 16)/<br>1 × 0,5 2,5 mm² (AWG 2014) |                                 |               |  |  |
|                                     | With end sleeve acc. to DIN 4622          | 20 Dawt 4             | 1 × 0,5 2,5 mm² (AWG 20 14)<br>1 × 0,5 1,5 mm² (AWG 20 16) |                                 |               |  |  |
|                                     | With twin end sleeve With twin end sleeve | 28 Pdf ( 4            |  |                                 |               |  |  |
|                                     |   |                       | 1 × 0.5 1.5 mm² (AWG 20 16)                                |                                 |               |  |  |
| Bartelan alamatian aritata aradata  | Stripped length                           |                       | /.   | 8 mm (0.28 0.31 in              | cn)           |  |  |
| Position signaling switch module    | Med . I I                                 |                       | 0.0  | 2 (4)4(6.20                     | 42)           |  |  |
| Spring-loaded terminals for         | Without end sleeve                        | 20.0                  |  | 2 2,5 mm <sup>2</sup> (AWG 28   |               |  |  |
| standard signaling contacts         | With end sleeve acc. to DIN 462           | 28 Part 4             | 0,25 1,5 mm² (AWG 20 16)                                   |                                 |               |  |  |
| 2 1 :                               | Stripped length                           |                       |  | 6 mm (0.2 0.24 inc              |               |  |  |
| Push-in connection for              | Solid                                     |                       |  | 2,5 mm² (AWG 20                 |               |  |  |
| standard signaling contacts         | With end sleeve                           |                       |  | 1,5 mm² (AWG 20                 |               |  |  |
|                                     | Stripped length                           |                       |  | 12 mm (0,39 0,47 i              |               |  |  |
| Push-in connection for              | Solid                                     |                       |  | 2,5 mm² (AWG 20                 |               |  |  |
| COM signaling contacts              | With end sleeve                           |                       |  | 1,5 mm² (AWG 20                 |               |  |  |
|                                     | Stripped length                           |                       | 10.  | 12 mm (0,39 0,47 i              | nch)          |  |  |
| Weights <sup>3)</sup>               |   |                       |  |                                 |               |  |  |
| 3-pole                              | Fixed-mounted circuit breaker             | kg                    | 55   | 55                              | 68            |  |  |
|                                     | Withdrawable circuit breaker              | kg                    | 52   | 52                              | 59            |  |  |
|                                     | without guide frame                       |                       |  |                                 |               |  |  |
|                                     | Guide frames                              | kg                    | 34   | 34                              | 50            |  |  |
|                                     |   | lea                   | 68.5   | 68.5                            | 86.5          |  |  |
| 4-pole                              | Fixed-mounted circuit breaker             | kg                    | 08.5   | 00.5                            |               |  |  |
| 4-pole                              | Withdrawable circuit breaker              | kg                    | 63.5   | 63.5                            | 74            |  |  |
| 4-pole                              |   |                       |  |                                 |               |  |  |

Maintenance means: Replacing main contact elements and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).
 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.
 Weights refer to:

 Breakers with breaking capacity E
 Fixed-mounted circuit breakers/guide frames with vertical connections
 Guide frame with position signaling switch


 Without any other accessories

Without any other accessories
 For more information on the DC pole straps, see the Equipment Manual for 3WA1

## 3WA1 non-automatic circuit breakers for DC

#### Application examples

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

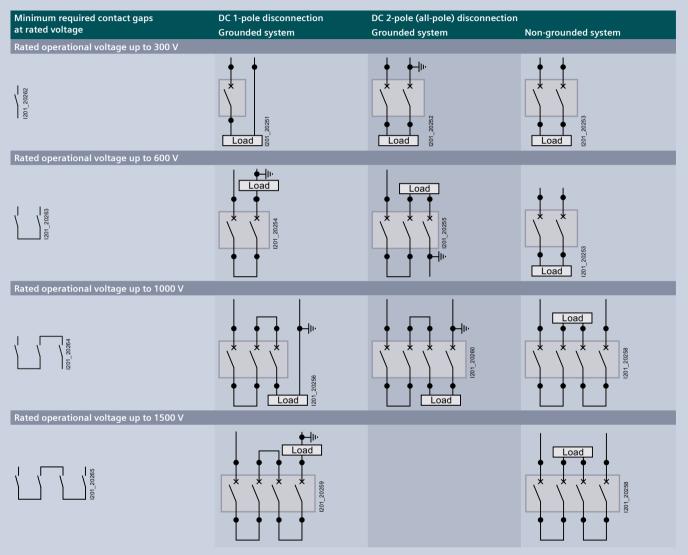

#### Note:

#### DC 2-pole (all-pole) disconnection; grounded system

The grounded conductor must always be assigned to the individual switching pole of the non-automatic air circuit breaker, so that in the event of a ground fault there are always 2 conducting paths in series in a circuit with 3-pole circuit breakers, and 3 conducting paths in series in a circuit with 4-pole circuit breakers. The jumpers between the switching poles must be short-circuit and ground-fault proof.

1

System overview, page 1/28 Siemens LV 10 · 2025 1/17

## Electronic trip unit

#### Differentiation





|  | ETU300 electronic trip unit | ETU600 electronic trip unit |
|--|-----------------------------|-----------------------------|
| Function                                       |                             |                             |
| Protective function LSI                        | •                           | •                           |
| Protective function LSIG                       | •                           |                             |
| Protective function LSIG Hi-Z                  | -                           |                             |
| Neutral conductor protection (N)               | •                           |                             |
| Metering function                              | -                           |                             |
| Enhanced Protective functions                  | -                           |                             |
| CubicleBUS <sup>2</sup>                        | -                           |                             |
| Display  | -                           |                             |
| DAS+ input/output                              | •                           |                             |
| LED display of reason for tripping             |                             |                             |
| Bluetooth and USB                              | -                           |                             |
| FW Updates                                     | -                           |                             |
| Internal self-test with and without tripping   |                             |                             |
| Extended test option (tripping characteristic) | -                           | •                           |
| Activation of the ETU via powerbank            | -                           |                             |
| Activation of the ETU for self-test via TD400  |                             | -                           |

#### Note:

By replacing the electronic trip unit, it is possible to upgrade from ETU300 to ETU600.

## ETU300 electronic trip unit

#### Protective functions

#### ETU300 LSI, ETU300 LSIG

| Protective function                            | Setting range and invariable parameters              | Values   |
|--|--|--|
| L: Overload protection LT                      |  |  |
| Tripping                                       | Switched on  |  |
| Current setting I <sub>r</sub>                 | 0.4 1.0 × <i>I</i> <sub>n</sub>                      | 0.4/0.5/0.6/0.7/0.75/0.8/0.85/0.9/0.95/1.0 × I <sub>n</sub>      |
| Tripping time $t_r$ at $6 \times I_r$          | 0.75 25 s  | 0.75/1/2/5/8/10/14/17/21/25 s                                    |
| Characteristic LT curve                        | l <sup>2</sup> t                                     |  |
| Thermal memory                                 | Switched on  |  |
| Cooling time constant                          | $18 \times t_{\rm r}$                                |  |
| Phase failure detection                        | Switched on  |  |
| L: Overload protection LT, neutral conductor   |  |  |
| Tripping                                       | Switched on  |  |
| Current setting I <sub>N</sub>                 | 1.0 × I <sub>n</sub>                                 |  |
| S: Short-time-delayed short-circuit protection | ST   |  |
| Tripping                                       | Can be switched on/off                               |  |
| Current setting I <sub>sd</sub>                | 1.5 $10 \times I_n$<br>max. $0.8 \times I_{cw}^{-1}$ | OFF/1.5/2/2.5/3/4/5/6/8/10 × $I_r$ max. $0.8 \times I_{cw}^{-1}$ |
| Tripping time t <sub>sd</sub>                  | 0.08 0.4 s   | 0.08/0.15/0.22/0.3/0.4 s   |
| Characteristic ST curve                        | I <sup>o</sup> t and I <sup>2</sup> t                |  |
| Reference point I <sub>ST ref</sub>            | 8 × I <sub>r</sub>                                   |  |
| I: Instantaneous short-circuit protection INST |  |  |
| Tripping                                       | Switched on  |  |
| Current setting I <sub>i</sub>                 | 1.5 15 × <i>I</i> <sub>n</sub>                       | 1.5/2/3/4/5/6/8/10/12/15 × I <sub>n</sub>                        |
|  | max. $0.8 \times I_{cs}^{-1}$                        | max. $0.8 \times I_{cs}^{-1}$                                    |
| Maintenance mode DAS+                          |  |  |
| Current setting $I_{i DAS+}$                   | 1.5 × <i>I</i> <sub>n</sub>                          | Activation via ETU input   |

#### ETU300 LSIG

| E10300 E310                      |               |   |
|----------------------------------|---------------|---|
| Protective function              | Setting range |   |
| G: Ground-fault protection GF    |               |   |
| Tripping                         | Switched on   |   |
| Method of ground fault detection | Residual      | Detection of ground-fault current via summation current formation in all phases and the N conductor |
| Characteristic GF curve          |               | l <sup>o</sup> t  |
| Current setting I <sub>g</sub>   |               | 0.2 × I <sub>n</sub> (min. 100 A, max. 1200 A)  |
| Tripping time $t_a$              | 0.2 s         |   |

 $<sup>^{1)}</sup>$  The setting value is limited as a function of the breaking capacity at rated operational voltage  $U_{\rm e}$ .

## ETU600 electronic trip unit

#### Protective functions

| ETU600 LSI, ETU600 LSIG, E            | TI 1600 I SIG Hi-7   |  | Current<br>metering | ready4COM | PMF-I<br>Energy<br>efficiency | PMF-II<br>Basic<br>Power<br>Monitoring | PMF-III<br>Advanced<br>Power |
|---------------------------------------|--|--|---------------------|-----------|-------------------------------|--|------------------------------|
| Protective function                   | Variable   | Setting values with  |                     |           |                               | Monitoring                             | Worldoning                   |
|                                       | setting range  | rotary switch  |                     |           |                               |  |                              |
| L: Overload protection LT             |  |  |                     |           |                               |  |                              |
| Tripping                              | Can be switched on/off   |  |                     | •         |                               | •                                      | •                            |
| Current setting I <sub>r</sub>        | 0.4 1.0 × <i>I</i> <sub>n</sub>  | 0.5/0.6/0.7/0.75/0.8/0.85/0.9/<br>0.95/1.0 × I <sub>n</sub>                | •                   | •         | •                             | •                                      | •                            |
| Tripping time $t_r$ at $6 \times I_r$ | At <i>I</i> <sup>2</sup> <i>t</i> : 0.5 30 s and at <i>I</i> <sup>4</sup> <i>t</i> : 0.5 5 s | 1/2/5/8/10/14/17/21/25 s   | •                   | •         | •                             | •                                      | •                            |
| Characteristic LT curve               | I²t and I⁴t  |  |                     | -         |                               | •                                      | -                            |
| Thermal memory                        | Can be switched on/off   |  |                     | •         |                               | •                                      | -                            |
| Cooling time constant                 | 10 and 18 $\times$ $t_{\rm r}$   |  |                     | -         |                               |  | -                            |
| Phase failure detection               | Can be switched on/off   |  |                     | •         |                               |  | •                            |
| Overload pre-alarm PAL                | Can be switched on/off   |  |                     | -         |                               |  | -                            |
| Current setting I <sub>r PAL</sub>    | 0.7 1.0 × <i>I</i> <sub>r</sub>  |  |                     | •         |                               | •                                      | -                            |
| Delay time t <sub>r PAL</sub>         | 0.5 1.0 × t <sub>r</sub>   |  |                     | •         |                               | •                                      | -                            |
| L: Overload protection LT, ne         |  |  |                     |           |                               |  |                              |
| Tripping                              | Can be switched on/off   |  |                     | •         | •                             |  | •                            |
| Current setting $I_{rN}$              | $0.2 2.0 \times I_n$ for 4-pole  | circuit breakers max. I <sub>n max</sub>                                   |                     | •         |                               |  | •                            |
| Current setting I <sub>rN PAL</sub>   | 0.7 1.0 × I <sub>N</sub>   |  |                     | •         |                               |  | •                            |
| S: Short-time-delayed short-          |  |  |                     |           |                               | _                                      |                              |
| Tripping                              | Can be switched on/off   |  |                     | •         | •                             | •                                      | •                            |
| Current setting I <sub>sd</sub>       | $0.6 \times I_{\rm n} \dots 0.8 \times I_{\rm cw}$ max. $0.8 \times I_{\rm cw}^{-1}$         | $1.5/2/2.5/3/4/5/6/8/10 \times I_r$<br>max. $0.8 \times I_{cw}^{1)}$       | •                   | •         | •                             | •                                      | •                            |
| Tripping time t <sub>sd</sub>         | 0.02 0.4 s   | At Fix: 0.08/0.15/0.22/0.3/0.4 s<br>At I <sup>2</sup> t: 0.1/0.2/0.3/0.4 s | •                   | •         | •                             | -                                      | -                            |
| Characteristic ST curve               | I <sup>0</sup> t and I <sup>2</sup> t  |  |                     | •         |                               |  | •                            |
| Reference point I <sub>ST ref</sub>   | 6-12 × I <sub>r</sub>  |  |                     | •         |                               | •                                      | -                            |
| Intermittent detection                | Can be switched on/off   |  |                     | •         | -                             |  | -                            |
| S: Directional short-time-dela        | <del></del>  | on dST   |                     |           |                               |  |                              |
| Tripping                              | Can be switched on/off   |  |                     |           |                               |  | -                            |
| Direction setting                     | Forward: ↓ or ↑  |  |                     |           |                               |  | •                            |
| Current setting I <sub>sd</sub> FW    | $0.6 \times I_{\rm n} \dots 0.8 \times I_{\rm cw}$   |  |                     |           |                               | •                                      | -                            |
| Current setting I <sub>sd</sub> REV   | $0.6 \times I_{\rm n} \dots 0.8 \times I_{\rm cw}$   |  |                     |           |                               |  | •                            |
| Tripping time t <sub>sd</sub> FW      | 0.05 0.4 s   |  |                     |           |                               |  | -                            |
| Tripping time $t_{\rm sd}$ REV        | 0.05 0.4 s   |  |                     |           |                               |  | -                            |
| I: Instantaneous short-circuit        |  |  |                     |           |                               |  |                              |
| Tripping                              | Can be switched on/off   |  |                     | •         |                               | -                                      | -                            |
| Current setting <i>I</i> <sub>i</sub> | $1.5 \times I_{\rm n} \dots 0.8 \times I_{\rm cs}$ max. $0.8 \times I_{\rm cs}^{-1}$         | 1.5/2/3/4/6/8/10/12/15 × $I_n$ max. $0.8 \times I_{cs}^{-1}$               | •                   | •         | •                             | •                                      | •                            |

<sup>1)</sup> The setting value is limited as a function of the breaking capacity at the set rated voltage.

Available, feature of the application packageCan be retrofitted

| ETU600 LSI, ETU600 LSIG,                            | ETU600 LSIG Hi-Z   |                                   | Current metering | ready4COM | PMF-I<br>Energy<br>efficiency | PMF-II<br>Basic<br>Power<br>Monitoring | PMF-III<br>Advanced<br>Power<br>Monitoring |
|---|--|-----------------------------------|------------------|-----------|-------------------------------|--|--|
| Protective function                                 | Variable<br>setting range  | Setting values with rotary switch |                  |           |                               |  |  |
| Reverse power protection R                          | P  | · ·                               |                  |           |                               |  |  |
| Tripping  | Can be switched on   | off                               |                  |           |                               | -                                      |  |
| Setting value P <sub>RP</sub>                       | $0.05 \dots 0.5 \times P_{\rm n}$  |                                   |                  |           |                               | -                                      |  |
| Tripping time $t_{RP}$                              | 0.01 25 s  |                                   |                  |           |                               | -                                      |  |
| Enhanced Protective function                        | ons EPF  |                                   |                  |           |                               |  |  |
| Phase unbalance current and phase unbalance voltage |  |                                   |                  |           |                               |  |  |
| Undervoltage and overvoltage                        |  |                                   |                  |           |                               |  | •  |
| Active power import and active                      | ve power export  |                                   |                  |           |                               | -                                      |  |
| Underfrequency and overfreq                         | quency   |                                   |                  |           |                               |  | •  |
| Total harmonic distortion for                       | current and voltage  |                                   |                  |           |                               |  |  |
| Phase sequence detection                            |  |                                   |                  |           |                               |  |  |
| Maintenance mode DAS+                               |  |                                   |                  |           |                               |  |  |
| Current setting I <sub>i DAS+</sub>                 | 1.5 10 × <i>I</i> <sub>n</sub>   |                                   |                  |           |                               |  |  |
| Current setting I <sub>g DAS+</sub>                 | With LSIG GFx optio<br>Residual: - Sizes 1 and 2: 10<br>- Size 3: 400 200<br>Direct: 15 2000 A | ) 2000 A and                      |                  | •         | •                             | •                                      | •  |
| Tripping time $t_{g DAS+}$                          | 0 5 s  |                                   |                  |           |                               |  | -  |
| Options   |  |                                   |                  |           |                               |  |  |
| Parameter set changeover                            |  | parameter set A and B             |                  |           |                               | -                                      | -  |
| Limit values  | Undershooting, ove   | shooting                          |                  | •         |                               | -                                      | -  |
| Waveform memory                                     |  |                                   |                  |           |                               |  |  |

Available, feature of the application packageCan be retrofitted

## ETU600 electronic trip unit

#### Protective functions

| ETU600 LSI  |                              |   | Current<br>metering | ready4COM | Energy efficiency | PMF-II<br>Basic<br>Power<br>Monitoring | PMF-III<br>Advanced<br>Power<br>Monitoring |
|---|------------------------------|---|---------------------|-----------|-------------------|--|--|
| Protective function   | Variable setting range       |   |                     |           |                   |  |  |
| G: Ground fault GF alarm  |                              |   |                     |           |                   |  |  |
| Alarm   | Can be switched on/off       |   |                     |           |                   |  |  |
| Current setting $I_{g \text{ alarm}}$ with LSIG GFx option plug | Detection method<br>Residual | Sizes 1 and 2: 100 5000 A<br>Size 3: 400 5000 A |                     |           |                   | •                                      | •  |
|   | Detection method<br>Direct   | 15 5000 A                                       |                     |           |                   | •                                      | -  |
| Alarm time t <sub>g alarm</sub>                                 |                              | 0 0.5 s   |                     |           |                   |  | -  |

<sup>■</sup> Available, feature of the application package

<sup>☐</sup> Can be retrofitted

| ETU600 LSIG   |  |   | Current<br>metering | ready4COM | PMF-I<br>Energy<br>efficiency |   | PMF-III<br>Advanced<br>Power<br>Monitoring |
|---|--|---|---------------------|-----------|-------------------------------|---|--|
| Protective function   | Variable setting range                 |   |                     |           |                               |   |  |
| G: Ground fault GF  |  |   |                     | _         |                               |   |  |
| Tripping  | Can be switched on/off                 |   | -                   | •         | -                             | • | -  |
| Method of ground fault detection                                | Residual                               | Detection of ground-fault current<br>via summation current formation<br>in all phases and the N conductor   | •                   | •         | •                             | • | •  |
|   | Direct                                 | Direct metering of the<br>ground-fault current with a<br>current transformer  | •                   | •         | •                             | • | •  |
|   | Dual                                   | Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Metering of the ground-fault current with an external current transformer | •                   | •         | •                             | • | •  |
| Characteristic GF curve   | With LSIG GFx option plug              | For Fix (I°t)/I²t/I⁴t/I6t   | •                   | -         | •                             | - | •  |
| Current setting $I_g$ with LSIG GFx option plug                 | Detection method<br>Residual           | Sizes 1 and 2: 100 2000 A<br>Size 3: 400 2000 A   | •                   | -         | •                             | • | •  |
|   | Detection method<br>Direct             | 15 2000 A   | •                   | -         | •                             | • | •  |
| Tripping time t <sub>g</sub>                                    | For Fix (Iºt)                          | 0 5 s   |                     |           |                               |   | -  |
|   | For $I^x t$ at $3 \times I_g$          | 0 30 s  |                     |           |                               |   | -  |
|   | t <sub>g def</sub> at I <sup>x</sup> t | 0.05 0.5 s  |                     | -         |                               | • | -  |
| Intermittent detection  | Can be switched on/off                 |   |                     | •         | •                             | - |  |
| G: Ground fault GF alarm  |  |   |                     |           |                               |   |  |
| Alarm   | Can be switched on/off                 |   |                     |           |                               | • |  |
| Current setting $I_{g \text{ alarm}}$ with LSIG GFx option plug | Detection method<br>Residual           | Sizes 1 and 2: 100 5000 A<br>Size 3: 400 5000 A   | •                   | •         | •                             | • | •  |
|   | Detection method<br>Direct             | 15 5000 A   | •                   | -         | •                             | • | •  |
| Alarm time t <sub>g alarm</sub>                                 |  | 0 0.5 s   |                     |           | •                             |   | •  |

<sup>■</sup> Available, feature of the application package

| ETU600 LSIG Hi-Z   |   |  | Current<br>metering | ready4COM | PMF-I<br>Energy<br>efficiency | PMF-II<br>Basic<br>Power<br>Monitoring | PMF-III<br>Advanced<br>Power<br>Monitoring |
|--|---|--|---------------------|-----------|-------------------------------|--|--|
| Protective function  | Variable setting range  |  |                     |           |                               |  |  |
| G: Ground fault GF Hi-Z  |   |  |                     |           |                               |  |  |
| Tripping   | Can be switched on/off  |  |                     |           |                               | -                                      | -  |
| Method of ground fault detection                               | Residual  | Detection of ground-fault current<br>via summation current formation<br>in all phases and the N conductor  | •                   | •         | •                             | •                                      | •  |
|  | Dual Hi-Z,<br>for high-impedance<br>connection of the exter-<br>nal current<br>transformers | Protection zone UREF: Detection of the ground-fault current by means of summation current formation Protection zone REF: Metering of the ground-fault current with an external current transformer combination | •                   | •         | •                             | •                                      | •  |
| Characteristic GF curve  | With LSIG GFx<br>option plug  | For Fix (I <sup>0</sup> t)/I <sup>2</sup> t/I <sup>4</sup> t/I <sup>6</sup> t  | •                   | •         | •                             | •                                      | •  |
| Current setting $I_g$ with LSIG GFx option plug                | Protection zone UREF  | Size 2: 100 2000 A and<br>Size 3: 400 2000 A   | •                   | •         | •                             | •                                      | •  |
|  | Protection zone REF   | 15 2000 A  |                     |           | •                             | -                                      | -  |
| Tripping time $t_{ m g}$                                       | For Fix (I <sup>0</sup> t)  | 0 5 s  |                     |           |                               | •                                      | -  |
|  | For $I^x t \ 3 \times I_g$ in protection zone UREF  | 0 30 s   | •                   | •         | •                             | •                                      | •  |
|  | t <sub>g def</sub> at I <sup>x</sup> t  | 0.05 0.5 s   |                     |           |                               | -                                      | -  |
| Intermittent detection   | Can be switched on/off  |  |                     |           |                               |  |  |
| G: Ground fault GF alarm                                       |   |  |                     |           |                               |  |  |
| Alarm  | Can be switched on/off  |  |                     | -         |                               |  |  |
| Current setting I <sub>g alarm</sub> with LSIG GFx option plug | Protection zone UREF  | Size 2: 100 5000 A and<br>Size 3: 400 5000 A   | •                   | •         | •                             | •                                      | •  |
| Alarm time $t_{\rm g\; alarm}$                                 |   | 0 0.5 s  | •                   |           | •                             | •                                      | •  |

<sup>■</sup> Available, feature of the application package

## ETU600 electronic trip unit

### Operation, interfaces and metering function

| ETU600                                       |   | Current<br>metering | ready4COM | PMF-I<br>Energy<br>efficiency | PMF-II<br>Basic<br>Power<br>Monitoring | PMF-III<br>Advanced<br>Power<br>Monitoring | Non-<br>automatic<br>air circuit<br>breakers |
|--|---|---------------------|-----------|-------------------------------|--|--|--|
| Operation and interfaces                     |   |                     |           |                               |  |  |  |
| Rotary switch                                |   |                     | -         |                               |  |  | _  |
| Display and operating keys                   |   |                     |           |                               |  |  | -  |
| SENTRON Powerconfig configur                 | ration software   |                     |           |                               |  |  | -  |
| Fieldbus communication                       |   | •                   |           |                               |  |  | -  |
| Color display                                |   |                     | •         |                               | •                                      | •  | -  |
| Bluetooth 1) and USB interface               |   | •                   |           |                               |  | •  | -  |
| Communication                                |   |                     |           |                               |  |  |  |
| Prepared for connection of a                 | Status messages of the circuit breaker  |                     | •         |                               | •                                      |  |  |
| communications module<br>(ready4COM feature) | Status messages of the ETU600 electronic trip unit  |                     | •         | •                             | •                                      | •  | -  |
|  | Remote operation, requires a communications module, closing coil, shunt trip  |                     | •         | •                             | •                                      | •  |  |
| Communications module                        |   |                     |           |                               |  |  | _  |
| Digital input and output on tl               | he ETU600 electronic trip unit  |                     |           |                               |  |  |  |
| Parameterizable input                        | For activating Maintenance mode DAS+ or can be used for parameter set changeover  | •                   | •         | •                             | •                                      | •  | -  |
| Parameterizable output                       | Usable as "life contact", early trip contact,<br>and for displaying "Parameter set B active" or<br>"Maintenance mode DAS+ active" | •                   | •         | •                             | •                                      | •  | _  |

 $<sup>^{9}\,</sup>$  A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

Not availableAvailable, feature of the application package

<sup>□</sup> Can be retrofitted

| ETU600   |           | Current<br>metering | ready4COM | PMF-I<br>Energy<br>efficiency | PMF-II<br>Basic<br>Power<br>Monitoring | PMF-III<br>Advanced<br>Power<br>Monitoring |
|--|-----------|---------------------|-----------|-------------------------------|--|--|
| Metering function  |           |                     |           |                               |  |  |
| Integrated voltage tap at top/bottom                                   |           | -                   | -         |                               |  |  |
| Voltage tap module VTM   |           | -                   | -         |                               |  |  |
| Type acc. to IEC 61557-12  | PMF-I     | -                   | -         |                               |  |  |
|  | PMF-II    | -                   | -         | -                             | -                                      |  |
|  | PMF-III   | -                   | -         | -                             | -                                      | -  |
| Metering values  |           |                     |           |                               |  |  |
| Temperature  |           | -                   |           |                               |  |  |
| Accuracy according to IEC 61557-12                                     |           |                     |           |                               |  |  |
| Phase current $I_{L1}$ , $I_{L2}$ , $I_{L3}$                           | Class 1   |                     |           |                               |  |  |
| Neutral conductor current I <sub>N</sub>                               | Class 1   |                     |           |                               |  | -  |
| Voltage U <sub>LN</sub>  | Class 0.5 | -                   | -         |                               | -                                      | -  |
| Voltage U <sub>LL</sub>  | Class 0.5 | -                   | -         |                               | -                                      |  |
| Active energy E <sub>a</sub>   | Class 2   | -                   | -         |                               |  |  |
| Active power P   | Class 2   | -                   | -         | -                             |  | -  |
| Accuracy according to manufacturer's specifications                    |           |                     |           |                               |  |  |
| Ground-fault current $I_g$ with ETU600 LSI                             | 2%        | -                   | -         | -                             | -                                      |  |
| Ground-fault current I <sub>g</sub> with ETU600 LSIG, ETU600 LSIG Hi-Z | 2%        |                     |           |                               | -                                      |  |
| Reactive energy E <sub>r</sub>   | 2%        | -                   | -         | -                             |  | -  |
| Apparent energy E <sub>ap</sub>  | 2%        | -                   | -         | -                             |  | -  |
| Reactive power Q   | 2%        | -                   | -         | -                             |  | -  |
| Apparent power S   | 2%        | -                   | -         | -                             |  | -  |
| Power factor PF  | 6%        | -                   | -         | -                             |  |  |
| cos φ  | 6%        | -                   | -         | -                             |  | -  |
| Frequency f  | 0.5%      | -                   | -         | -                             |  | -  |
| Current unbalance  | 2.5%      | -                   | -         | -                             |  |  |
| Voltage unbalance  | 1.5%      | -                   | -         | -                             |  |  |
| Total harmonic distortion THD-I <sup>1)</sup>                          | 2%        | -                   | -         | -                             | -                                      |  |
| Total harmonic distortion THD-U 1)                                     | 2%        | -                   | -         | -                             | -                                      |  |
| Harmonic I, U 1)   | 2%        | -                   | -         | -                             | -                                      |  |

 $<sup>^{1)}~</sup>$  For 2nd to 15th harmonic  $\pm 2\%$  and for 16th to 31st harmonic  $\pm 5\%$ 

Licenses for activating the test function in SENTRON Powerconfig software


| License (ALM)              | Test scope  | Test values can be set | Documentation | Article No.        |
|----------------------------|---|------------------------|---------------|--------------------|
| Basic<br>(unlimited)       | LSIG  | No                     | No            | Free available     |
| Standard<br>(365 days)     | LSIG  | Yes                    | Yes           | 7KN2720-0CE00-1YC1 |
| Extended new<br>(365 days) | LSIG dST Phase unbalance current Phase unbalance voltage Total harmonic distortion (THD) for current and voltage (from Powerconfig V3.28) Undervoltage, overvoltage Forward power Reverse power Underfrequency Overfrequency Phase sequence detection | Yes                    | Yes           | 7KN2720-0CE00-2YC1 |

Available, feature of the application packageNot available

## Connection

#### Main circuit connection

#### 3WA11 - 3WA13

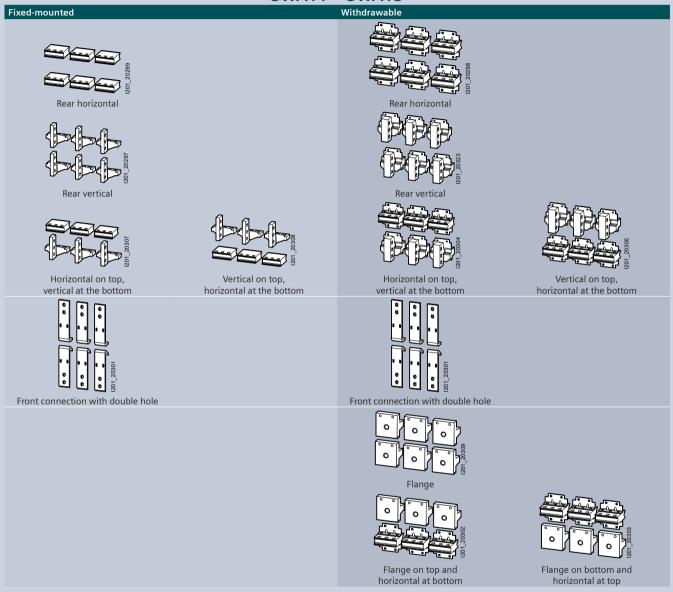



#### Secondary disconnect terminal

The auxiliary and control cables are connected at the manual connectors using the push-in technology of the auxiliary conductor connections of the circuit breaker.

Coding pins on the manual connectors prevent them being inserted in the wrong slots.








Screw connection (optional)

For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible

- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
  - Non-automatic circuit breakers with 3 blocks
  - Non-automatic circuit breakers with ready4COM feature with 4 blocks
  - Circuit breakers with ETU600 LSI or LSIG with 4 blocks
  - Circuit breakers with ETU600 LSIG-HiZ with 5 blocks
  - Circuit breakers with ETU300 LSI/LSIG with 4 blocks

For dimension drawings, see Equipment Manual – 3WA1 air circuit breakers www.siemens.com/lowvoltage/manuals (109763061)

## Communication

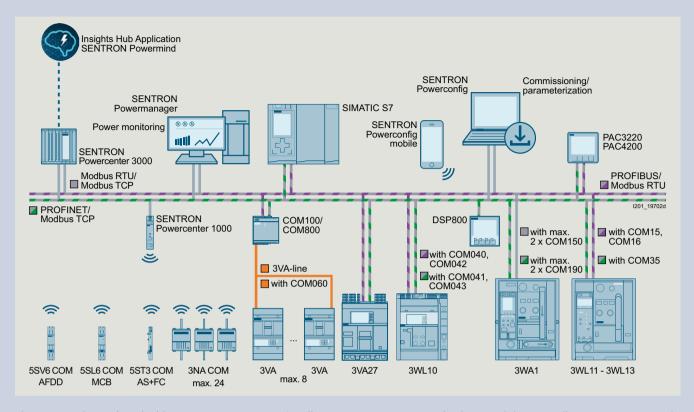

The 3WA can be equipped with up to two PROFINET IO/Modbus TCP COM190 communications modules or Modbus RTU COM150 and up to five IOM230 digital input/output modules.

For the optional communications interface with the COM190 or COM150 communications module, a circuit breaker with the ready4COM feature must be selected as the circuit breaker/non-automatic air circuit breaker. The first COM190 or COM150 communications module must be selected via a Z option. If you want to use a further COM190 or COM150 communications module, this must be ordered separately as an accessory. Both COM190 or COM150 communications modules can be run in parallel.

The first IOM230 digital input/output module can be selected via a Z option.


The up to four further digital input/output modules must be ordered separately as accessories.

You will find further information on the COM190 in the Equipment Manual – 3WA1 air circuit breakers www.siemens.com/lowvoltage/manuals (109763061)

## 3WA11 – 3WA13 system overview

#### Circuit breakers and non-automatic circuit breakers for AC and DC

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

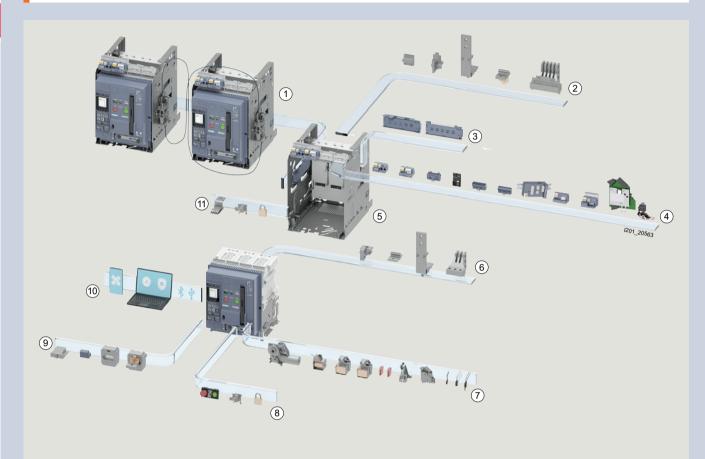


- 1 Interlocking solutions with Bowden cable
- (2) Main connection variants for guide frame
- (3) Position signaling switch (PSS) for the guide frame
- (4) Interfaces/COM-modules/Aux. terminals
- (5) Guide frame with shutter
- (6) Main connection variants for fixed-mounted version


- 7 Internal accessories: aux. release, spring charging motor, aux. contacts
- (8) Locking solutions for fixed-mounted version
- 9 Electronic trip units (ETU)
- 10 Digital function packages can be activated for the ETU
- (11) Interlocking solutions for withdrawable version

## Online configurator highlights


#### www.siemens.com/lowvoltage/3wa-configurator

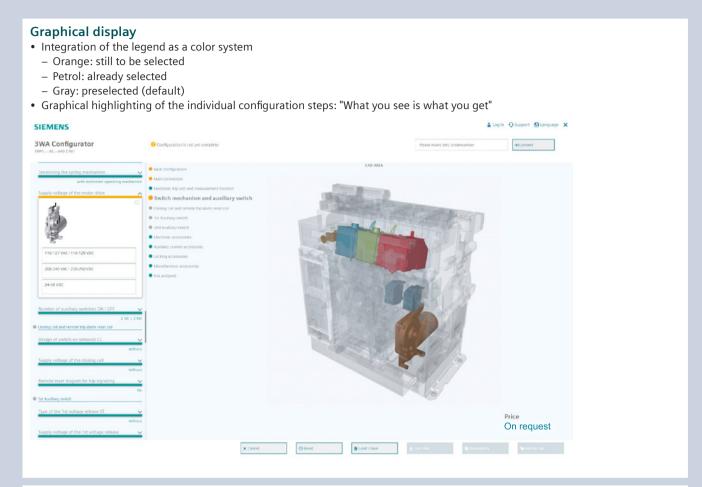

#### Splitting function (Frame and circuit breaker can be ordered separately)

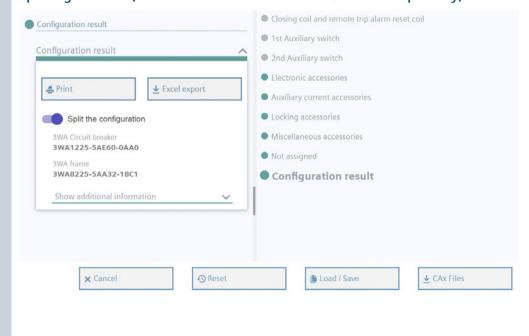

#### Direct conversion of a 3WL article number to a 3WA article number in the configurator

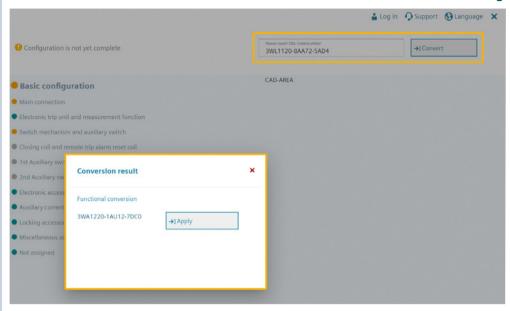

#### Responsive design (adapted to the differing requirements of the displaying devices)



#### Dynamic customer price during configuration



## Structure of the article numbers Siemens EcoTech



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

| www.sicilicii                        | s.com/lowvoltage                          | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | , inigan                                    |                         |  |                                  |   |        |                            |    |    |    |    |  |
|--------------------------------------|---|---|---|-------------------------|--|----------------------------------|---|--------|----------------------------|----|----|----|----|--|
|                                      |   | 014/4                                   | 5   | 6                       | 7  | 8                                | 9   | 10     | 11                         | 12 | 13 | 14 | 15 |  |
|                                      | 3   | 3WA1                                    |   |                         | _  |                                  |   |        |                            | -  |    |    |    |  |
| Circuit brea                         | kers and                                  |   |   |                         |  |                                  |   |        |                            |    |    |    |    |  |
|                                      | atic circuit bre                          | akers                                   |   |                         |  |                                  |   |        |                            |    |    |    |    |  |
| Size (SZ)                            | 1   | ancis                                   | 1   |                         |  |                                  |   |        |                            |    |    |    |    |  |
| (,                                   | 2   |   | 2   |                         |  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 3   |   | 3   |                         |  |                                  |   |        |                            |    |    |    |    |  |
|                                      |   |   | 8 ZS  |                         |  |                                  |   |        |                            |    |    |    |    |  |
| Max. rated current                   | 630 A                                     |   | <u>-</u>                                    | 0                       | 6  |                                  |   |        |                            |    |    |    |    |  |
| I <sub>n max</sub>                   | 800 A                                     |   | _   |                         | 8  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 1000 A                                    | <b>-</b>                                | _   |                         | 0  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 1250 A                                    | <b>I</b> -                              | -   | 1                       | 2  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 1600 A                                    | <b>-</b>                                | -   | 1                       | 6  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 2000 A                                    |   | -   |                         | 0  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 2500 A                                    |   | -   |                         | 5  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 3200 A                                    |   | -   |                         | 2  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 3600 A new                                |   | -   |                         | 6  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 4000 A                                    |   |   |                         | 0  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 5000 A                                    |   | -   |                         | 0  |                                  |   |        |                            |    |    |    |    |  |
|                                      | 6300 A                                    |   | •   |                         | 3  |                                  |   |        |                            |    |    |    |    |  |
| Short-circuit                        | N   | <b>■</b>   -                            | - 55/42                                     | kA                      |  | 2                                |   |        |                            |    |    |    |    |  |
| breaking capacity                    | S   |   | - 66/50                                     |                         |  | 3                                |   |        |                            |    |    |    |    |  |
| <sub>cu</sub> at 500/690 V           | M   | -1                                      | - 85/66<br>- 100/81                         |                         |  | 5                                |   |        |                            |    |    |    |    |  |
|                                      | H<br>C                                    |   | <ul><li>■ 100/8!</li><li>− 130/10</li></ul> |                         |  | 6                                |   |        |                            |    |    |    |    |  |
|                                      |   |   |   | : 150/150               | kA   | 6                                |   |        |                            |    |    |    |    |  |
|                                      |   |   |   | : 130/130               |  |                                  |   |        |                            |    |    |    |    |  |
| Non-automatic circu                  | it breakers 3)                            |   |   |                         |  |                                  | Α   | Α      |                            |    |    |    |    |  |
| Non-automatic circu                  | it breakers, ready4COM                    | ) feature                               |   |                         |  |                                  | С   | Α      |                            |    |    |    |    |  |
| Application                          | ETU300                                    | Protective                              | function                                    | LSI                     |  |                                  | Α   | В      |                            |    |    |    |    |  |
| packages with                        | electronic trip unit                      |   |   | LSIG                    |  |                                  | Α   | С      |                            |    |    |    |    |  |
| protective and<br>metering functions | ETU600                                    | Current m                               | netering<br>netering, re                    | adv4CON                 | 14) foatu  | ro                               | A<br>C  |        |                            |    |    |    |    |  |
| for circuit breakers                 | ETU600                                    | PMF-I                                   | letering, re                                |                         | tap on   |                                  | L   |        |                            |    |    |    |    |  |
|                                      | electronic trip unit with                 | Energy ef                               | ficiency                                    |                         | tap on   |                                  | _   |        |                            |    |    |    |    |  |
|                                      | metering function,                        | PMF-II Bas                              |   |                         | tap on   |                                  | М   |        |                            |    |    |    |    |  |
|                                      | internal voltage tap in                   | Monitorin                               |   |                         | tap on   |                                  | F   |        |                            |    |    |    |    |  |
|                                      | the circuit breaker,                      | PMF-III Ac                              |   |                         | tap on   |                                  | N   |        |                            |    |    |    |    |  |
|                                      | power supply of the ETU600 via the VTM680 | Power Mo                                | onitoring                                   | voitage                 | tap on   | pottom                           | G   |        |                            |    |    |    |    |  |
|                                      | voltage tap module and                    |   |   |                         |  |                                  |   |        |                            |    |    |    |    |  |
|                                      | ready4COM                                 |   |   |                         |  |                                  |   |        |                            |    |    |    |    |  |
|                                      |   |   |   | LSI                     |  |                                  |   | Е      |                            |    |    |    |    |  |
|                                      | Protective functions                      |   |   | LSIG                    |  |                                  |   | F<br>G |                            |    |    |    |    |  |
|                                      |   |   | -   |                         | 7  |                                  |   |        |                            |    |    |    |    |  |
| Nombou of the lea                    | Protective functions                      | - 1                                     | <b>.</b>                                    | LSIG Hi                 |  |                                  |   | G      |                            |    |    |    |    |  |
| Number of poles                      |   |   | •   | LSIG Hi                 | -pole  | eutral l                         | eft   | G      | 0                          |    |    |    |    |  |
| Number of poles                      | Protective functions                      |   | :   | LSIG Hi<br>3            | -pole<br>-pole, N  |                                  |   |        | 1                          |    |    |    |    |  |
| Number of poles                      | Protective functions Fixed-mounted        | - 1                                     | nosition                                    | LSIG Hi 3 4             | -pole<br>-pole, N<br>-pole, N                                  |                                  |   |        | 2                          |    |    |    |    |  |
| Number of poles                      | Protective functions                      | Without p                               |   | LSIG Hi  3  4  4        | -pole<br>-pole, N<br>-pole, N<br>-pole                         | eutral r                         | ight <mark>n</mark>                               |        | 2 3                        |    |    |    |    |  |
| Number of poles                      | Protective functions Fixed-mounted        | - 1                                     |   | LSIG Hi 3 4 4 3         | -pole<br>-pole, N<br>-pole, N<br>-pole<br>-pole, N             | eutral r                         | ight <mark>m</mark><br>eft                        | ew     | 1<br>2<br>3<br>4           |    |    |    |    |  |
| Number of poles                      | Protective functions Fixed-mounted        | Without signaling                       | switch                                      | LSIG Hi 3 4 4 4 4       | -pole<br>-pole, N<br>-pole, N<br>-pole<br>-pole, N<br>-pole, N | eutral r                         | ight <mark>m</mark><br>eft                        | ew     | 1<br>2<br>3<br>4<br>5      |    |    |    |    |  |
| Number of poles                      | Protective functions Fixed-mounted        | Without signaling                       | switch                                      | LSIG Hi  3 4 4 3 4 4 3  | -pole<br>-pole, N<br>-pole, N<br>-pole<br>-pole, N<br>-pole, N | eutral r<br>eutral l<br>eutral r | ight <mark>n</mark><br>eft<br>ight <mark>n</mark> | ew     | 1<br>2<br>3<br>4<br>5<br>6 |    |    |    |    |  |
| Number of poles                      | Protective functions Fixed-mounted        | Without signaling                       | switch                                      | LSIG Hi 3 4 4 3 4 4 3 4 | -pole<br>-pole, N<br>-pole, N<br>-pole<br>-pole, N<br>-pole, N | eutral r<br>eutral l<br>eutral r | ight <mark>n</mark><br>eft<br>ight <mark>n</mark> | ew     | 1<br>2<br>3<br>4<br>5      |    |    |    |    |  |

<sup>1)</sup> Not available for breaking capacity C

<sup>2)</sup> Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

<sup>3)</sup> Frame size 1 with breaking capacity H is not offered as a non-

<sup>4)</sup> If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM)

16

15

|                                       |                    | 3WA  | 1                                     | 5                                   |                       | 6  | 7  | _                     | 8                                   |                                     | 9                     | 10                         |  | 11                                       |  | 12                                     | 13<br><b>–</b> | 14 |
|---------------------------------------|--------------------|--|---------------------------------------|-------------------------------------|-----------------------|--|--|-----------------------|-------------------------------------|-------------------------------------|-----------------------|----------------------------|--|--|--|--|----------------|----|
| Connectio                             | n                  |  | Fixe                                  | d-mo                                | unted                 |  |  | With                  | ndraw                               | able                                |                       |                            |  |  |  |  |                |    |
| Size 1                                |                    |  | Vertical                              | Horizontal                          | Front double hole     | Vertical on top/horizontal at the bottom | Horizontal on top/vertical at the bottom | Without guide frame   | Vertical                            | Horizontal                          | Front double hole     | Flange                     | Vertical on top/horizontal at the bottom | Horizontal on top/vertical at the bottom | Flange on top/horizontal at the bottom | Horizontal on top/flange at the bottom |                |    |
| Short-circuit<br>Breaking<br>capacity | N, S, M            | 630 A<br>800 A<br>1000 A<br>1250 A<br>1600 A<br>2000 A           | 1<br>1<br>1<br>1<br>1                 | 2<br>2<br>2<br>2<br>2<br>2          | 3<br>3<br>3<br>3<br>3 | 5<br>5<br>5<br>5<br>5                    | 6<br>6<br>6<br>6<br>6                    | 0<br>0<br>0<br>0<br>0 | 1<br>1<br>1<br>1<br>1<br>1          | 2<br>2<br>2<br>2<br>2<br>2          | 3<br>3<br>3<br>3<br>3 | 4<br>4<br>4<br>4<br>4<br>4 | 5<br>5<br>5<br>5<br>5                    | 6<br>6<br>6<br>6<br>6                    | 7<br>7<br>7<br>7<br>7                  | 8<br>8<br>8<br>8<br>8                  |                |    |
|                                       | H <mark>new</mark> | 2500 A<br>630 A<br>800 A<br>1000 A<br>1250 A<br>1600 A<br>2000 A | 1<br>1<br>1<br>1<br>1<br>1            | 2<br>2<br>2<br>2<br>2<br>2<br>2     | -<br>-<br>-<br>-<br>- | 5<br>5<br>5<br>5<br>5<br>5               | 6<br>6<br>6<br>6<br>6                    | 0<br>0<br>0<br>0<br>0 | 1<br>1<br>1<br>1<br>1<br>1<br>1     | -<br>2<br>2<br>2<br>2<br>2<br>2     | -<br>-<br>-<br>-<br>- | -<br>4<br>4<br>4<br>4<br>4 | 5<br>5<br>5<br>5<br>5<br>5               | -<br>6<br>6<br>6<br>6<br>6               | -<br>7<br>7<br>7<br>7<br>7             | 8<br>8<br>8<br>8<br>8                  |                |    |
| Size 2                                |                    | 2500 A   | 1                                     | 2                                   | _                     | 5  | 6  | 0                     | 1                                   | _                                   | _                     | _                          | _  | -  | _                                      | _                                      |                |    |
| Short-circuit<br>Breaking<br>capacity | S, M, H            | 2000 A<br>2500 A<br>3200 A<br>3600 A<br>4000 A                   | 1<br>1<br>1<br>-<br>1 <sup>1)2)</sup> | 2<br>2<br>2<br>-<br>2 <sup>2)</sup> | 3<br>3<br>3<br>-      | 5<br>5<br>5<br>-<br>5                    | 6<br>6<br>6<br>-<br>6                    | 0<br>0<br>0<br>-<br>0 | 1<br>1<br>1<br>-<br>1 <sup>1)</sup> | 2<br>2<br>2<br>-<br>2 <sup>2)</sup> | 3<br>3<br>3<br>-      | 4<br>4<br>4<br>4<br>-      | 5<br>5<br>5<br>-<br>5                    | 6<br>6<br>6<br>-<br>6                    | 7<br>7<br>7<br>-                       | 8<br>8<br>8<br>-                       |                |    |
|                                       | С                  | 2000 A<br>2500 A<br>3200 A                                       | 1 1 1                                 | 2 2 2                               | -<br>-<br>-           | 5<br>5<br>5                              | 6<br>6<br>6                              | 0 0                   | 1 1 1                               | 2 2 2                               | -<br>-<br>-           | 4 4                        | 5<br>5<br>5                              | 6 6                                      | 7<br>7<br>7                            | 8 8                                    |                |    |
| Size 3                                |                    |  |                                       |                                     |                       |  |  |                       |                                     |                                     |                       |                            |  |  |  |  |                |    |
| Short-circuit<br>Breaking<br>capacity | н                  | 4000 A<br>5000 A<br>6300 A<br>4000 A                             | 1<br>1<br>1                           | 2 2 - 2                             | 3                     | 5<br>5<br>-<br>5                         | 6<br>6<br>-                              | 0 0 0                 | 1<br>1<br>1                         | 2<br>2<br>-<br>2                    | 3                     | 4 4                        | 5<br>5<br>-<br>5                         | 6<br>6<br>-                              | -<br>-<br>-                            | -<br>-<br>-                            |                |    |
|                                       | С                  | 5000 A<br>6300 A   | 1                                     | 2                                   | -                     | 5  | 6  | 0                     | 1                                   | 2                                   | -                     | -                          | 5  | 6  | -                                      | -                                      |                |    |

The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1.
 Dimensionally compatible connections can be ordered with the additional Z option D01.
 Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

| www.siemei                         | ns.com/lowvoltage/                                | 3wa-configurator                            |   |       |        |        |    |
|------------------------------------|---|---|---|-------|--------|--------|----|
|                                    | 3   | 5 6 7                                       | 8 9 10 11                               | 12 13 | 14     | 15     | 16 |
| Operating                          | mechanisms, au                                    | uxiliary switches                           | and auxiliary releases                  | 5     | П      |        |    |
| Operating mechanism and            | Manual recharging of the stored energy mechanism  |   | 2 NO, 2 NC<br>4 NO, 4 NC                | 0     |        |        |    |
| auxiliary switch                   | Recharging of the stored energy mechanism by      | 24 30 V DC                                  | 2 NO, 2 NC<br>4 NO, 4 NC                | 5     |        |        |    |
|                                    | spring charging motor (M)                         | 48 60 V DC                                  | 4 NO, 4 NC                              | 6     |        |        |    |
|                                    |   | 110 127 V AC/                               | 2 NO, 2 NC                              | 3     |        |        |    |
|                                    |   | 110 125 V DC                                | 4 NO, 4 NC                              | 7     |        |        |    |
|                                    |   | 208 240 V AC/<br>220 250 V DC               | 2 NO, 2 NC                              | 4     |        |        |    |
|                                    |   | 220 230 V DC                                | 4 NO, 4 NC                              | 8     |        |        |    |
| Closing coil and remote trip alarm | Without closing coil                              | Without remote trip alarm reset coil        |   |       | Α      |        |    |
| reset coil 1)2)                    | With closing coil                                 | Without remote trip alarm                   | 24 30 V DC                              |       | В      |        |    |
|                                    | (CC/CC-COM) <sup>3)</sup> for uninterrupted duty, | reset coil                                  | 48 60 V DC                              |       | С      |        |    |
|                                    | 100% OP   |   | 110 127 V AC/110 125 V DC               |       | D      |        |    |
|                                    |   | and the second                              | 208 240 V AC/220 250 V DC               | Е     |        |        |    |
|                                    |   | With remote trip alarm reset coil (RR)      | 24 30 V DC                              |       | F<br>G |        |    |
|                                    |   | for momentary duty 1% OP                    | 48 60 V DC<br>110 127 V AC/110 125 V DC |       | H      |        |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               |       |        |        |    |
|                                    | With closing coil (CC)                            | Without remote trip alarm                   | 24 30 V DC                              |       | K      |        |    |
|                                    | for momentary duty,                               | reset coil                                  | 48 60 V DC                              |       |        |        |    |
|                                    | 5% OP   |   | 110 127 V AC/110 125 V DC               |       | М      |        |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               |       | N      |        |    |
|                                    |   | With remote trip alarm                      | 24 30 V DC                              |       | Р      |        |    |
|                                    |   | reset coil (RR)<br>for momentary duty 1% OP | 48 60 V DC                              |       | Q      |        |    |
|                                    |   | for momentary duty 1% Or                    | 110 127 V AC/110 125 V DC               |       | R      |        |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               |       | S      |        |    |
| 2nd auxiliary                      | Without 2nd auxiliary relea                       | ase   |   |       |        | Α      |    |
| release                            | With shunt trip (ST),                             |   | 24 30 V DC                              |       |        | В      |    |
|                                    | uninterrupted duty 100% (                         | OP  | 48 60 V DC                              |       |        | С      |    |
|                                    |   |   | 110 127 V AC/110 125 V DC               |       |        | D      |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               |       |        | E      |    |
|                                    | With shunt trip (ST),<br>momentary duty 5% OP     |   | 24 30 V DC                              |       |        | F      |    |
|                                    | momentary duty 5 % Of                             |   | 48 60 V DC<br>110 127 V AC/110 125 V DC |       |        | G<br>H |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               |       |        | J      |    |
|                                    | With undervoltage release                         | (LIVR)                                      | 24 30 V DC                              |       |        |        |    |
|                                    | instantaneous (≤ 0.08 s) a                        |   | 48 60 V DC                              |       |        | N      |    |
|                                    | (≤ 0.2 s)   |   | 110 127 V AC/110 125 V DC               |       | Р      |        |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               | Q     |        |        |    |
|                                    |   |   | 380 415 V AC                            |       |        | R      |    |
|                                    | With undervoltage release                         |   | 48 V DC                                 |       |        | S      |    |
|                                    | adjustable delay 0.2 3.2                          | S   | 60 V DC                                 |       |        | T      |    |
|                                    |   |   | 110 127 V AC/110 125 V DC               |       |        | U      |    |
|                                    |   |   | 208 240 V AC/220 250 V DC               |       |        | V      |    |
|                                    |   |   | 380 415 V AC                            |       |        | W      |    |

<sup>1)</sup> Remote trip alarm reset coil is not available for non-automatic circuit breakers

<sup>2)</sup> When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.

<sup>&</sup>lt;sup>3)</sup> If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the

factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

|                       | 3WA1 5 6                        | 7 8 9 10 11 12 13 14 15   | 16 |
|-----------------------|---------------------------------|---------------------------|----|
| Auxiliary releases    |                                 |                           |    |
| 1st auxiliary release | Without 1st auxiliary release   |                           | 0  |
|                       | With shunt trip (ST/ST-COM) 1), | 24 30 V DC                | 1  |
|                       | uninterrupted duty 100% OP      | 48 60 V DC                | 2  |
|                       |                                 | 110 127 V AC/110 125 V DC | 3  |
|                       |                                 | 208 240 V AC/220 250 V DC | 4  |
|                       | With shunt trip (ST),           | 24 30 V DC                | 5  |
|                       | momentary duty 5% OP            | 48 60 V DC                | 6  |
|                       |                                 | 110 127 V AC/110 125 V DC | 7  |
|                       |                                 | 208 240 V AC/220 250 V DC | 8  |

<sup>1)</sup> If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.




Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

| www.siemen                           | is.com/lowvortage/                                  | JWa-Com        | iigui          | ator          |                     |            |   |          |    |    |    |    |    |    |
|--------------------------------------|---|----------------|----------------|---------------|---------------------|------------|---|----------|----|----|----|----|----|----|
|                                      |   | 14/44          | 5              | 6             | 7                   | 8          | 9                                       | 10       | 11 | 12 | 13 | 14 | 15 | 16 |
|                                      | 3   | WA1            |                |               |                     |            |   |          |    | -  | -  |    |    |    |
| Circuit brea                         | kers and  |                |                |               |                     |            |   |          |    |    |    |    |    |    |
|                                      |   | decre          |                |               |                     |            |   | ll       |    |    |    |    |    |    |
|                                      | atic circuit brea                                   | ikers          |                |               |                     |            |   |          |    |    |    |    |    |    |
| Size (SZ)                            | 2   |                | 1 2            |               |                     |            |   |          |    |    |    |    |    |    |
|                                      | 3   |                | 2              |               |                     |            |   | i i      |    |    |    |    |    |    |
|                                      |   | 3 2 7          |                |               |                     |            |   | 1 1      |    |    |    |    |    |    |
|                                      | 620.4   | SZ<br>SZ<br>SZ |                |               |                     |            |   | !!       |    |    |    |    |    |    |
| Max. rated current In max            | 630 A<br>800 A                                      | <b>=</b>       |                | 0             | 6<br>8              |            |   |          |    |    |    |    |    |    |
| current in max                       | 1000 A  | ■<br>■         |                | 1             | 0                   |            |   |          |    |    |    |    |    |    |
|                                      | 1250 A  |                |                | 1             | 2                   |            |   |          |    |    |    |    |    |    |
|                                      | 1600 A  | <u>-</u>       |                | 1             | 6                   |            |   |          |    |    |    |    |    |    |
|                                      | 2000 A  | <b>-</b>       |                | 2             | 0                   |            |   | i i      |    |    |    |    |    |    |
|                                      | 2500 A  |                |                | 2             | 5                   |            |   |          |    |    |    |    |    |    |
|                                      | 3200 A  |                |                | 3             | 2                   |            |   |          |    |    |    |    |    |    |
|                                      | 3600 A new  | - ■1) -        |                | 3             | 6                   |            |   | ! !      |    |    |    |    |    |    |
|                                      | 4000 A  |                |                | 4             | 0                   |            |   | !!       |    |    |    |    |    |    |
|                                      | 5000 A  |                |                | 5             | 0                   |            |   | ! !      |    |    |    |    |    |    |
|                                      | 6300 A  |                |                | 6             | 3                   |            |   |          |    |    |    |    |    |    |
| Short-circuit                        | Е   | <b>-</b>       | 85/50/         |               |                     | 8          |   | <u> </u> |    |    |    |    |    |    |
| breaking<br>capacity I <sub>cu</sub> |   |                | 85/50/         |               |                     | 8          |   | !!       |    |    |    |    |    |    |
| at 690 V/                            |   |                | 3-pole         | ::<br>0/125 k | Δ                   | 8          |   |          |    |    |    |    |    |    |
| 690 V IT network/                    |   |                | 4-pole         |               | ^                   |            |   |          |    |    |    |    |    |    |
| 1000 V                               |   |                |                | 0/125 k       | Α                   |            |   | <u> </u> |    |    |    |    |    |    |
| Non-automatic circu                  | uit breakers  |                |                |               |                     |            | Α                                       | Α        |    |    |    |    |    |    |
| Non-automatic circu                  | iit breakers, ready4COM fe                          | eature         |                |               |                     |            | С                                       | Α        |    |    |    |    |    |    |
| Application                          | ETU300  | Protective fu  | nction         | LSI           |                     |            | Α                                       | В        |    |    |    |    |    |    |
| packages with<br>protective and      | electronic trip unit<br>ETU600                      | Current mete   | ring           | LSIG          |                     |            | A                                       | С        |    |    |    |    |    |    |
| metering functions                   | electronic trip unit                                | Current mete   |                | adv4C0        | OM <sup>3)</sup> fe | ature      | C                                       | 1 1      |    |    |    |    |    |    |
| for circuit breakers                 | ETU600  | PMF-I          |                |               |                     | on top     | U                                       | i i      |    |    |    |    |    |    |
|                                      | electronic trip unit with                           | Energy efficie |                | Volta         | ge tap              | on botto   | m Q                                     | ]        |    |    |    |    |    |    |
|                                      | metering function,                                  | PMF-II Basic I | Power          |               |                     | on top     | V                                       | ! !      |    |    |    |    |    |    |
|                                      | internal voltage tap in the circuit breaker, VTM640 | PMF-III Adva   | nced           |               |                     | on botto   | m R<br>W                                | ┨        |    |    |    |    |    |    |
|                                      | voltage tap module and                              | Power Monit    |                | VOILU         | ge tap              | on top     | • |          |    |    |    |    |    |    |
|                                      | ready4COM   |                |                | Volta         | ge tap              | on botto   | m S                                     | i i      |    |    |    |    |    |    |
|                                      | Protective functions                                |                | LSI            |               |                     |            |   | E        |    |    |    |    |    |    |
|                                      |   |                | LSIG<br>LSIG F | J; 7          |                     |            |   | F<br>G   |    |    |    |    |    |    |
| Number of poles                      | Fixed-mounted                                       | -              | LJIGF          | 11-7          | 3-pole              | Δ          |   | U        | 0  |    |    |    |    |    |
|                                      | mounted   |                |                |               |                     | e, Neutral | left                                    |          | 1  |    |    |    |    |    |
|                                      |   |                |                |               |                     | e, Neutral |   | ew       | 2  |    |    |    |    |    |
|                                      | Withdrawable  | Without pos    |                |               | 3-pole              | e          |   |          | 3  |    |    |    |    |    |
|                                      |   | signaling sw   | itch           |               | 4-pole              | e, Neutral | left                                    |          | 4  |    |    |    |    |    |
|                                      |   |                |                |               | 4-pole              | e, Neutral | right 🔟                                 | iew      | 5  |    |    |    |    |    |
|                                      |   | With position  |                |               | 3-pole              |            |   |          | 6  |    |    |    |    |    |
|                                      |   | signaling sw   | itch 2)        |               |                     | e, Neutral | left                                    |          | 7  |    |    |    |    |    |
|                                      |   |                |                |               |                     | e, Neutral |   | iew      | 8  |    |    |    |    |    |
|                                      |   |                |                |               |                     |            |   |          |    |    |    |    |    |    |

<sup>1)</sup> Not available for breaking capacity C

<sup>&</sup>lt;sup>2)</sup> Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:  $3 \times$  connected position,  $2 \times$  test position,  $1 \times$  disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:  $1 \times$  connected position,  $1 \times$  test position,  $1 \times$  disconnected position + message through communications interface for disconnected position and for "not available"

<sup>3)</sup> If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM)

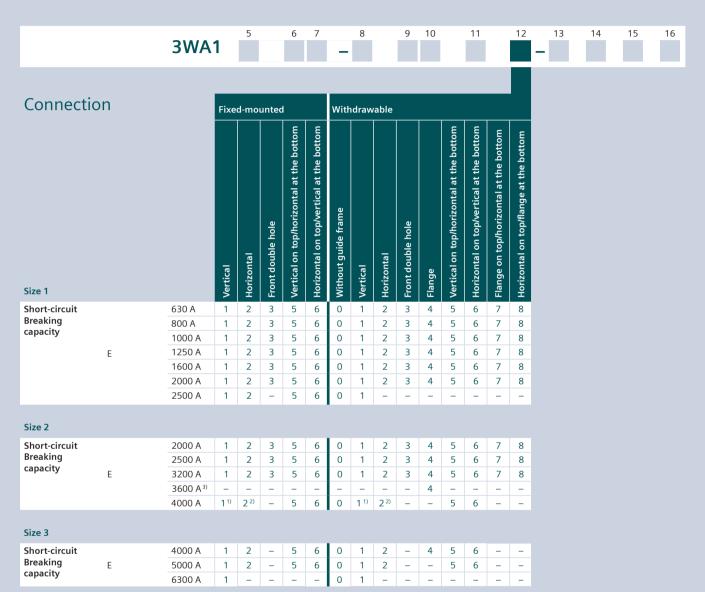

 $<sup>^{1)}\,</sup>$  The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1.

Dimensionally compatible connections can be ordered with the additional Z option D01.

<sup>&</sup>lt;sup>2)</sup> Also available for 4-pole circuit breakers with Z option DO4: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

| · ·                                   |  | SWA1 5 6 7                                  | 8 9 10 11 12 13 1  | 4 15 |  |  |  |  |  |  |  |  |
|---------------------------------------|--|---|--|------|--|--|--|--|--|--|--|--|
| Operating                             | mechanisms, at Manual recharging of the            | -   | and auxiliary releases                                     |      |  |  |  |  |  |  |  |  |
| nechanism and                         | stored energy mechanism                            |   | 4 NO, 4 NC 1   |      |  |  |  |  |  |  |  |  |
| auxiliary switch                      | Recharging of the stored                           | 24 30 V DC                                  | 2 NO, 2 NC 2   |      |  |  |  |  |  |  |  |  |
|                                       | energy mechanism by spring charging motor (M)      |   | 4 NO, 4 NC 5   |      |  |  |  |  |  |  |  |  |
|                                       | spring charging motor (w)                          | 48 60 V DC                                  | 4 NO, 4 NC 6   |      |  |  |  |  |  |  |  |  |
|                                       |  | 110 127 V AC/<br>110 125 V DC               | 2 NO, 2 NC 3   |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 4 NO, 4 NC 7<br>2 NO, 2 NC 4                               |      |  |  |  |  |  |  |  |  |
|                                       |  | 208 240 V AC/<br>220 250 V DC               |  |      |  |  |  |  |  |  |  |  |
|                                       |  | 220 230 V DC                                | 4 NO, 4 NC   |      |  |  |  |  |  |  |  |  |
| Closing coil and<br>remote trip alarm | Without closing coil                               | Without remote trip alarm reset coil        | A  | \    |  |  |  |  |  |  |  |  |
| eset coil 1)                          | With closing coil                                  | Without remote trip alarm                   | 24 30 V DC   | 3    |  |  |  |  |  |  |  |  |
|                                       | (CC/CC-COM) 2) for uninterrupted duty,             | reset coil                                  | 48 60 V DC   |      |  |  |  |  |  |  |  |  |
|                                       | 100% OP  |   | 110 127 V AC/110 125 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 208 240 V AC/220 250 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       |  | With remote trip alarm                      | 24 30 V DC   |      |  |  |  |  |  |  |  |  |
|                                       |  | reset coil (RR)<br>for momentary duty 1% OP | 48 60 V DC   |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 110 127 V AC/110 125 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       | Mister also in a sell (CC)                         | Witht                                       | 208 240 V AC/220 250 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       | With closing coil (CC) for momentary duty,         | Without remote trip alarm reset coil        | 24 30 V DC   |      |  |  |  |  |  |  |  |  |
|                                       | 5% OP  | 10301 0011                                  | 48 60 V DC   |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 110 127 V AC/110 125 V DC M<br>208 240 V AC/220 250 V DC N |      |  |  |  |  |  |  |  |  |
|                                       |  | With remote trip alarm                      | 24 30 V DC   |      |  |  |  |  |  |  |  |  |
|                                       |  | reset coil (RR)                             | 48 60 V DC   |      |  |  |  |  |  |  |  |  |
|                                       |  | for momentary duty 1% OP                    | 110 127 V AC/110 125 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 208 240 V AC/220 250 V DC                                  |      |  |  |  |  |  |  |  |  |
| 2nd auxiliary                         | Without 2nd auxiliary relea                        | se  |  | А    |  |  |  |  |  |  |  |  |
| elease                                | With shunt trip (ST),                              |   | 24 30 V DC   | В    |  |  |  |  |  |  |  |  |
|                                       | uninterrupted duty 100% C                          | )P  | 48 60 V DC   | С    |  |  |  |  |  |  |  |  |
|                                       |  |   | 110 127 V AC/110 125 V DC                                  | D    |  |  |  |  |  |  |  |  |
|                                       |  |   | 208 240 V AC/220 250 V DC                                  | Е    |  |  |  |  |  |  |  |  |
|                                       | With shunt trip (ST),                              |   | 24 30 V DC   | F    |  |  |  |  |  |  |  |  |
|                                       | momentary duty 5% OP                               |   | 48 60 V DC   | G    |  |  |  |  |  |  |  |  |
|                                       |  |   | 110 127 V AC/110 125 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 208 240 V AC/220 250 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       | With undervoltage release                          |   | 24 30 V DC   |      |  |  |  |  |  |  |  |  |
|                                       | instantaneous ( $\leq 0.08$ s) ar ( $\leq 0.2$ s)  | iu snort-time delayed                       | 48 60 V DC   |      |  |  |  |  |  |  |  |  |
|                                       | ·/   |   | 110 127 V AC/110 125 V DC                                  |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 208 240 V AC/220 250 V DC<br>380 415 V AC                  |      |  |  |  |  |  |  |  |  |
|                                       | Misla con dance it I                               | (LIV/D +) 3)                                | 380 415 V AC<br>48 V DC                                    |      |  |  |  |  |  |  |  |  |
|                                       | With undervoltage release adjustable delay 0.2 3.2 |   | 48 V DC<br>60 V DC   |      |  |  |  |  |  |  |  |  |
|                                       | ,  |   |  |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 110 127 V AC/110 125 V DC U<br>208 240 V AC/220 250 V DC V |      |  |  |  |  |  |  |  |  |
|                                       |  |   | 208 240 V AC/220 250 V DC V<br>380 415 V AC W              |      |  |  |  |  |  |  |  |  |

<sup>1)</sup> Remote trip alarm reset coil is not available for non-automatic circuit breakers

<sup>2)</sup> If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71

<sup>&</sup>lt;sup>3)</sup> The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

|                       | 3WA1 5 6 7  | 8 9 10 11 12 13 14<br>-  | 15 16            |
|-----------------------|---|--|------------------|
| Auxiliary releases    |   |  |                  |
| 1st auxiliary release | Without 1st auxiliary release With shunt trip (ST/ST-COM) 1, uninterrupted duty 100% OP | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC | 0 1 2 3 4        |
|                       | With shunt trip (ST),<br>momentary duty 5% OP   | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC | 5<br>6<br>7<br>8 |

<sup>1)</sup> If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

## Structure of the article numbers Scotech



#### Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

|   |   |  | -   |             |   |                        |                  |                  |     | 4.0 |    |    |    |
|---|---|--|---|-------------|---|------------------------|------------------|------------------|-----|-----|----|----|----|
|   |   | 3WA1   | 5   | 6           | 7   | 8                      | 9                | 10               | 11  | 12  | 13 | 14 | 15 |
|   |   | JVVAI  |   |             | -   | -                      |                  |                  |     |     |    |    |    |
| Circuit brea  | kers and  |  |   |             |   |                        |                  |                  |     |     |    |    |    |
| non-autom   | atic circuit br   | reakers  |   |             |   |                        |                  | H                |     |     |    |    |    |
| Size (SZ)   | 2   | Cukers   | 2   |             |   |                        |                  |                  |     | -   |    |    |    |
| 5120 (32)   | 3   |  | 3   |             |   |                        |                  | i i              |     | -   |    |    |    |
|   |   | SZ 2<br>SZ 3   |   |             |   |                        |                  |                  |     |     |    |    |    |
| Max. rated  | 2000 A  | S S  |   | 2           | 0   |                        |                  |                  |     | -   |    |    |    |
| current I <sub>n max</sub>  | 2500 A  | <u>-</u>   |   | 2           | 5<br>2  |                        |                  | i i              |     | -   |    |    |    |
| 111100  | 3200 A  | <b>-</b>   |   | 3           | 2   |                        |                  | i i              |     |     |    |    |    |
|   | 4000 A  |  |   | 4           | 0   |                        |                  | l l              |     |     |    |    |    |
|   | 5000 A  |  |   | 5           | 0   |                        |                  | 1 1              |     |     |    |    |    |
|   | 6300 A  | - =  |   | 6           | 3   |                        |                  |                  |     | -   |    |    |    |
| Short-circuit   | E   | ■   -   8  | 5/85/50 k   | κA          |   | 8                      |                  | i i              |     |     |    |    |    |
| breaking<br>  |   |  | -pole:  |             |   | 8                      |                  | 1 1              |     |     |    |    |    |
| capacity I <sub>cu</sub><br>at 690 V/1000 V/  |   |  | 50/125/7<br>-pole:  | 0 kA        |   |                        |                  | 1 1              |     |     |    |    |    |
| 1150 V-   |   |  | 30/125/7  | 0 kA        |   |                        |                  | 1 1              |     |     |    |    |    |
|   |   |  |   |             |   |                        |                  |                  |     |     |    |    |    |
| Non-automatic circu   | uit breakers  |  | 30/123/7  | 0.01        |   |                        | A                | А                |     |     |    |    |    |
|   | uit breakers<br>uit breakers, ready4CO  |  | 30112317  |             |   |                        | A<br>C           | A                |     | -   |    |    |    |
| Non-automatic circu   | uit breakers, ready4CO  |  |   | LSI         |   |                        | C                | В                |     |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with   | uit breakers, ready4CO<br>ETU300<br>electronic trip unit                                    | M feature<br>Protective                                      | function  |             |   |                        | C<br>A<br>A      | ÷                |     |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and   | Lit breakers, ready4CO ETU300 electronic trip unit ETU600                                   | M feature Protective Current m                               | function  | LSI<br>LSIG | DM 2) for   | turo                   | C A A            | В                |     |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions                         | ETU300 electronic trip unit ETU600 electronic trip unit                                     | M feature Protective Current m                               | function<br>etering<br>etering, re                          | LSI<br>LSIG | DM <sup>2)</sup> fea  | ture                   | C<br>A<br>A      | ВС               |     |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions                         | Lit breakers, ready4CO ETU300 electronic trip unit ETU600                                   | Protective  Current m  Current m                             | function  | LSI<br>LSIG | DM <sup>2)</sup> fea  | ture                   | C A A            | B<br>C           |     |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions                         | ETU300 electronic trip unit ETU600 electronic trip unit                                     | Protective  Current m Current m L                            | function<br>etering<br>etering, re                          | LSI<br>LSIG | DM <sup>2)</sup> fea  | iture                  | C A A            | ВС               |     |     |    |    |    |
| Application<br>packages with<br>protective and<br>metering functions<br>for circuit breakers                        | ETU300 electronic trip unit ETU600 electronic trip unit                                     | Protective  Current m Current m L                            | function<br>etering<br>etering, re<br>SI<br>SIG             | LSI<br>LSIG | DM <sup>2)</sup> fea<br>3-pole                              |                        | C A A            | B<br>C           |     |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions<br>for circuit breakers | ETU300 electronic trip unit ETU600 electronic trip unit Protective functions                | Protective  Current m Current m L                            | function<br>etering<br>etering, re<br>SI<br>SIG             | LSI<br>LSIG | 3-pole  |                        | A<br>A<br>A<br>C | B<br>C           | 0 1 |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions                         | ETU300 electronic trip unit ETU600 electronic trip unit Protective functions  Fixed-mounted | Protective  Current m  Current m  L                          | function<br>etering<br>etering, ro<br>SI<br>SIG<br>SIG Hi-Z | LSI<br>LSIG | 3-pole<br>4-pole,   |                        | A A A C          | B<br>C<br>E<br>F | 1   |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions<br>for circuit breakers | ETU300 electronic trip unit ETU600 electronic trip unit Protective functions                | Protective  Current m Current m L L Without p                | function etering etering, re SI SIG SIG Hi-Z                | LSI<br>LSIG | 3-pole<br>4-pole,<br>4-pole,<br>3-pole                      | . Neutral              | A A C            | B<br>C<br>E<br>F | 1   |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions<br>for circuit breakers | ETU300 electronic trip unit ETU600 electronic trip unit Protective functions  Fixed-mounted | Protective  Current m  Current m  L                          | function etering etering, re SI SIG SIG Hi-Z                | LSI<br>LSIG | 3-pole<br>4-pole,<br>4-pole,<br>3-pole<br>4-pole,           | , Neutral<br>, Neutral | C A A A C C      | E<br>F<br>G      | 1   |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions<br>for circuit breakers | ETU300 electronic trip unit ETU600 electronic trip unit Protective functions  Fixed-mounted | Protective  Current m  Current m  L  L  Without p  signaling | function etering etering, re SI SIG SIG Hi-Z osition switch | LSI<br>LSIG | 3-pole<br>4-pole,<br>3-pole<br>4-pole,<br>4-pole,           | . Neutral              | C A A A C C      | E<br>F<br>G      | 1   |     |    |    |    |
| Non-automatic circu<br>Application<br>packages with<br>protective and<br>metering functions<br>for circuit breakers | ETU300 electronic trip unit ETU600 electronic trip unit Protective functions  Fixed-mounted | Protective  Current m Current m L L Without p                | function etering etering, re SI SIG SIG Hi-Z osition switch | LSI<br>LSIG | 3-pole<br>4-pole,<br>3-pole<br>4-pole,<br>4-pole,<br>3-pole | , Neutral<br>, Neutral | A A A C          | E<br>F<br>G      |     |     |    |    |    |

<sup>1)</sup> Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:

<sup>3 ×</sup> connected position, 2 × test position, 1 × disconnected position;

Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:

<sup>1 ×</sup> connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

<sup>2)</sup> If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM)

|               |     | 214/4            |          | 5               |                   | 6  | 7  |                     | 8        |                 | 9                 | 10     |  | 11                                       |  | 12                                     | 13 | 14 | 4 | 15 | 16 |
|---------------|-----|------------------|----------|-----------------|-------------------|--|--|---------------------|----------|-----------------|-------------------|--------|--|--|--|--|----|----|---|----|----|
|               |     | 3WA <sup>2</sup> |          |                 |                   |  |  | _                   |          |                 |                   |        |  |  |  |  | -  |    |   |    |    |
|               |     |                  |          |                 |                   |  |  |                     |          |                 |                   |        |  |  |  |  |    |    |   |    |    |
|               |     |                  |          |                 |                   |  |  |                     |          |                 |                   |        |  |  |  |  |    |    |   |    |    |
| Connectio     | าท  |                  |          |                 |                   |  |  |                     |          |                 |                   |        |  |  |  |  |    |    |   |    |    |
| Connectic     | ווע |                  | Fixe     | d-mo            | untec             |  |  | With                | ndraw    | able            |                   |        |  |  |  |  |    |    |   |    |    |
|               |     |                  |          |                 |                   | шс                                       |  |                     |          |                 |                   |        | E  | Ĕ  | Ε                                      | ۽                                      |    |    |   |    |    |
|               |     |                  |          |                 |                   | ottc                                     | tt                                       |                     |          |                 |                   |        | otto                                     | oft                                      | tto                                    | tto!                                   |    |    |   |    |    |
|               |     |                  |          |                 |                   | d ər                                     | d ər                                     |                     |          |                 |                   |        | d ər                                     | e b                                      | e pc                                   | oq e                                   |    |    |   |    |    |
|               |     |                  |          |                 |                   | at th                                    | at th                                    |                     |          |                 |                   |        | at th                                    | at t                                     | 흎                                      | t t                                    |    |    |   |    |    |
|               |     |                  |          |                 |                   | tal                                      | Cal:                                     |                     |          |                 |                   |        | tal                                      | cal                                      | al a                                   | e a                                    |    |    |   |    |    |
|               |     |                  |          |                 |                   | zon                                      | erti                                     | ē                   |          |                 |                   |        | zon                                      | erti                                     | ont                                    | anç                                    |    |    |   |    |    |
|               |     |                  |          |                 | e e               | hori                                     | /dc                                      | iran                |          |                 | e e               |        | hori                                     | /dc                                      | oriz                                   | J/dc                                   |    |    |   |    |    |
|               |     |                  |          |                 | e hc              | /do                                      | n to                                     | de 1                |          |                 | e hc              |        | /do:                                     | n te                                     | h/dc                                   | n t                                    |    |    |   |    |    |
|               |     |                  |          | <u>ia</u>       | lqn               | on 1                                     | la l                                     | gui                 |          | <u>=</u>        | qn                |        | on 1                                     | la l                                     | n tc                                   | la                                     |    |    |   |    |    |
|               |     |                  | cal      | Zon             | t do              | cal                                      | Loz                                      | out                 | cal      | luoz            | t do              | ge     | cal                                      | zoni                                     | ge c                                   | luoz                                   |    |    |   |    |    |
| Size 2        |     |                  | Vertical | Horizontal      | Front double hole | Vertical on top/horizontal at the bottom | Horizontal on top/vertical at the bottom | Without guide frame | Vertical | Horizontal      | Front double hole | Flange | Vertical on top/horizontal at the bottom | Horizontal on top/vertical at the bottom | Flange on top/horizontal at the bottom | Horizontal on top/flange at the bottom |    |    |   |    |    |
| Short-circuit |     | 2000 A           | 1        | 2               | 3                 | 5  | 6  | 0                   | 1        | 2               | 3                 | 4      | 5  | 6  | 7                                      | 8                                      |    |    |   |    |    |
| Breaking      |     | 2500 A           | 1        | 2               | 3                 | 5  | 6  | 0                   | 1        | 2               | 3                 | 4      | 5  | 6  | 7                                      | 8                                      |    |    |   |    |    |
| capacity      | E   | 3200 A           | 1        | 2               | 3                 | 5  | 6  | 0                   | 1        | 2               | 3                 | 4      | 5  | 6  | 7                                      | 8                                      |    |    |   |    |    |
|               |     | 3600 A           | _        | _               | _                 | _  | _  | _                   | _        | _               | _                 | 4      | _  | _  | _                                      | _                                      |    |    |   |    |    |
|               |     | 4000 A           | 1 1)     | 2 <sup>2)</sup> | -                 | 5  | 6  | 0                   | 1 1)     | 2 <sup>2)</sup> | _                 | -      | 5  | 6  | _                                      | -                                      |    |    |   |    |    |
|               |     |                  |          |                 |                   |  |  |                     |          |                 |                   |        |  |  |  |  |    |    |   |    |    |
| Size 3        |     |                  |          |                 |                   |  |  |                     |          |                 |                   |        |  |  |  |  |    |    |   |    |    |
| Short-circuit |     | 4000 A           | 1        | 2               | _                 | 5  | 6  | 0                   | 1        | 2               | -                 | 4      | 5  | 6  | _                                      | -                                      |    |    |   |    |    |
| Breaking      | E   | 5000 A           | 1        | 2               | _                 | 5  | 6  | 0                   | 1        | 2               | _                 | -      | 5  | 6  | _                                      | _                                      |    |    |   |    |    |
| capacity      |     | 6300 A           | 1        | _               | -                 | _  | _  | 0                   | 1        | _               | -                 | -      | -  | _  | _                                      | _                                      |    |    |   |    |    |

Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.
 With Z option D01, vertical connection can be changed to the connection compatible with 3WL.
 Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your air circuit breaker, please use our online configurator at

| www.sieme                          | ns.com/lowvoltage/                                 | 3wa-configurator                            | •  |       |        |    |  |  |  |  |  |
|------------------------------------|--|---|--|-------|--------|----|--|--|--|--|--|
|                                    | 5  | 5 6 7                                       | 8 9 10 11  | 12 13 | 14 15  | 16 |  |  |  |  |  |
|                                    | 5  | OVVAI                                       | _  |       |        |    |  |  |  |  |  |
| Operating                          | mechanisms, au                                     | uxiliary switches                           | and auxiliary releases                                 |       |        |    |  |  |  |  |  |
| Operating mechanism and            | Manual recharging of the stored energy mechanism   | Without spring charging motor               | 2 NO, 2 NC<br>4 NO, 4 NC                               | 0     |        |    |  |  |  |  |  |
| auxiliary switch                   | Recharging of the stored energy mechanism by       | 24 30 V DC                                  | 2 NO, 2 NC<br>4 NO, 4 NC                               | 5     |        |    |  |  |  |  |  |
|                                    | spring charging motor (M)                          | 48 60 V DC                                  | 4 NO, 4 NC   | 6     |        |    |  |  |  |  |  |
|                                    |  | 110 127 V AC/<br>110 125 V DC               | 2 NO, 2 NC<br>4 NO, 4 NC                               | 7     |        |    |  |  |  |  |  |
|                                    |  | 208 240 V AC/<br>220 250 V DC               | 2 NO, 2 NC<br>4 NO, 4 NC                               | 8     |        |    |  |  |  |  |  |
| Closing coil and remote trip alarm | Without closing coil                               | Without remote trip alarm reset coil        |  |       | А      |    |  |  |  |  |  |
| reset coil 1)                      | With closing coil<br>(CC/CC-COM) <sup>2)</sup>     | Without remote trip alarm reset coil        | 24 30 V DC<br>48 60 V DC                               |       | В      | -  |  |  |  |  |  |
|                                    | for uninterrupted duty,<br>100% OP                 |   | 110 127 V AC/110 125 V DC                              |       | D      |    |  |  |  |  |  |
|                                    | 100% OP  |   | 208 240 V AC/220 250 V DC                              |       | Е      |    |  |  |  |  |  |
|                                    |  | With remote trip alarm                      | 24 30 V DC   |       | F      |    |  |  |  |  |  |
|                                    |  | reset coil (RR)<br>for momentary duty 1% OP | 48 60 V DC   |       | G      |    |  |  |  |  |  |
|                                    |  |   | 110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC |       | H      |    |  |  |  |  |  |
|                                    | With closing coil (CC)                             | Without remote trip alarm                   | 24 30 V DC   |       | K      |    |  |  |  |  |  |
|                                    | for momentary duty,                                | reset coil                                  | 48 60 V DC   |       | L      |    |  |  |  |  |  |
|                                    | 5% OP  |   | 110 127 V AC/110 125 V DC                              |       | М      |    |  |  |  |  |  |
|                                    |  |   | 208 240 V AC/220 250 V DC                              |       | N      |    |  |  |  |  |  |
|                                    |  | With remote trip alarm                      | 24 30 V DC   |       | Р      |    |  |  |  |  |  |
|                                    |  | reset coil (RR)<br>for momentary duty 1% OP | 48 60 V DC   |       | Q      |    |  |  |  |  |  |
|                                    |  |   | 110 127 V AC/110 125 V DC                              |       | R      | -  |  |  |  |  |  |
|                                    |  |   | 208 240 V AC/220 250 V DC                              |       | S      |    |  |  |  |  |  |
| 2nd auxiliary                      | Without 2nd auxiliary release                      | ase   |  |       | Α      |    |  |  |  |  |  |
| release                            | With shunt trip (ST),<br>uninterrupted duty 100% ( | 20  | 24 30 V DC   |       | В      |    |  |  |  |  |  |
|                                    | uninterrupted duty 100% (                          | Jr  | 48 60 V DC   |       | С      |    |  |  |  |  |  |
|                                    |  |   | 110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC |       | D<br>E |    |  |  |  |  |  |
|                                    | With shunt trip (ST),                              |   | 24 30 V DC   |       | F      |    |  |  |  |  |  |
|                                    | momentary duty 5% OP                               |   | 48 60 V DC   |       | G      |    |  |  |  |  |  |
|                                    |  |   | 110 127 V AC/110 125 V DC                              |       | Н      |    |  |  |  |  |  |
|                                    |  |   | 208 240 V AC/220 250 V DC                              |       | J      |    |  |  |  |  |  |
|                                    | With undervoltage release                          |   | 24 30 V DC   |       | L      |    |  |  |  |  |  |
|                                    | instantaneous ( $\leq 0.08$ s) at ( $\leq 0.2$ s)  | nd short-time delayed                       | 48 60 V DC   |       | N      |    |  |  |  |  |  |
|                                    | (= U.Z 3)  |   | 110 127 V AC/110 125 V DC                              |       | Р      |    |  |  |  |  |  |
|                                    |  |   | 208 240 V AC/220 250 V DC                              | Q     |        |    |  |  |  |  |  |
|                                    | With undervoltage release                          | (LIV/R-+) 3)                                | 380 415 V AC<br>48 V DC                                |       | R      |    |  |  |  |  |  |
|                                    | adjustable delay 0.2 3.2                           |   | 60 V DC  |       |        |    |  |  |  |  |  |
|                                    |  |   | 110 127 V AC/110 125 V DC                              | U     |        |    |  |  |  |  |  |
|                                    |  |   | 208 240 V AC/220 250 V DC                              |       |        |    |  |  |  |  |  |
|                                    |  |   | 380 415 V AC   |       | W      |    |  |  |  |  |  |

<sup>&</sup>lt;sup>2)</sup> If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71

<sup>&</sup>lt;sup>3)</sup> The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

|                       | 3WA1 5 6 7                    | 8 9 10              | 11 12  | 13<br><b>–</b> | 14 | 15 | 16 |
|-----------------------|-------------------------------|---------------------|--------|----------------|----|----|----|
| Auxiliary releases    |                               |                     |        |                |    |    | П  |
| 1st auxiliary release | Without 1st auxiliary release |                     |        |                |    |    | 0  |
|                       | With shunt trip               | 24 30 V DC          |        |                |    |    | 1  |
|                       | (ST/ST-COM) 1),               | 48 60 V DC          |        |                |    |    | 2  |
|                       | uninterrupted duty 100% OP    | 110 127 V AC/110 12 | 5 V DC |                |    |    | 3  |
|                       |                               | 208 240 V AC/220 25 | 0 V DC |                |    |    | 4  |
|                       | With shunt trip (ST),         | 24 30 V DC          |        |                |    |    | 5  |
|                       | momentary duty 5% OP          | 48 60 V DC          |        |                |    |    | 6  |
|                       |                               | 110 127 V AC/110 12 | 5 V DC |                |    |    | 7  |
|                       |                               | 208 240 V AC/220 25 | 0 V DC |                |    |    | 8  |

<sup>1)</sup> If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.



#### Basic configuration for DC non-automatic circuit breakers

|   |                  | 3WA                                   | 1                             | 5                  |                     | 6  | 7  | _                       | 8          |              | 9                   | 10          |  | 11   |  | 12                                       | 13 | 14 | 15 |
|---|------------------|---------------------------------------|-------------------------------|--------------------|---------------------|--|--|-------------------------|------------|--------------|---------------------|-------------|--|--|--|--|----|----|----|
| Non-autom   | natic            |                                       |                               |                    |                     |  |  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| circuit brea  |                  |                                       |                               |                    |                     |  |  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| Size (SZ)   | 2                |                                       |                               | 2                  |                     |  |  |                         |            |              |                     |             |  |  |  |  |    |    |    |
|   |                  | BG 2                                  |                               |                    |                     |  |  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| Max. rated current $I_{n \max}$                       | 1000 A<br>2000 A | — — — — — — — — — — — — — — — — — — — |                               |                    |                     | 1 2  | 0  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| · · · · · · ·   | 4000 A           | -                                     |                               |                    |                     | 4  | 0  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| Short-circuit<br>breaking<br>capacity I <sub>cc</sub> | D<br>E           | ■ 2                                   | 5 kA, 6<br>0 kA, 1<br>0 kA, 1 | 000 V              | DC                  |  |  |                         | 1<br>8     |              |                     |             |  |  |  |  |    |    |    |
| Non-automatic circ                                    | wit brookers     |                                       | J KA, I                       | 500 V              | DC "                |  |  |                         |            |              | А                   | U           |  |  |  |  |    |    |    |
| Non-automatic circ                                    |                  | adv4COM f                             | eature                        |                    |                     |  |  |                         |            |              | _                   | U           |  |  |  |  |    |    |    |
| Number of poles 2)                                    | Fixed-mounted    |                                       | catare                        |                    |                     |  |  | 3-po                    | le         |              |                     | -           |  | 0  |  |  |    |    |    |
| rumber of poles                                       |                  |                                       |                               |                    |                     |  |  | 4-po                    |            |              |                     |             |  | 1  |  |  |    |    |    |
|   | Withdrawable     | Witho                                 | ut posi                       | tion si            | gnali               | ng sw  | itch                                       | 3-po<br>4-po            |            |              |                     |             |  | 3  |  |  |    |    |    |
|   |                  | With p                                | ositior                       | signa              | aling s             | switch   | 1 <sup>2)</sup>                            | 3-po                    |            |              |                     |             |  | 6  |  |  |    |    |    |
|   |                  |                                       |                               |                    |                     |  |  | 4-po                    | le         |              |                     |             |  | 7  |  | ı  |    |    |    |
|   |                  |                                       |                               |                    |                     |  |  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| Connection  | 1                |                                       |                               |                    |                     |  |  |                         |            |              |                     |             |  |  |  |  |    |    |    |
| Connection  | า                |                                       | Fixe                          | d-moi              | unted               | 1  |  | With                    | ndraw      | able         |                     |             |  |  |  |  |    |    |    |
| Connection  | า                |                                       | Fixe                          | d-moi              | untec               |  | the bottom                                 | With                    | ndraw      | able         |                     |             | the bottom                               |  | he bottom                              | ne bottom                                |    |    |    |
| Connection  | 1                |                                       | Fixe                          | d-mo               | unteo               |  | rtical at the bottom                       |                         | ndraw      | able         |                     |             | ontal at the bottom                      |  | ontal at the bottom                    | inge at the bottom                       |    |    |    |
| Connection  | 1                |                                       | Fixe                          | d-moi              |                     |  | op/vertical at the bottom                  |                         | ndraw      | able         | əle                 |             | horizontal at the bottom                 |  | norizontal at the bottom               | op/flange at the bottom                  |    |    |    |
| Connection  | 1                |                                       | Fixe                          |                    |                     |  | on top/vertical at the bottom              |                         | ndraw      |              | ole hole            |             | top/horizontal at the bottom             |  | top/horizontal at the bottom           | on top/flange at the bottom              |    |    |    |
| Connection  | 1                |                                       |                               |                    |                     |  | ontal on top/vertical at the bottom        |                         |            |              | double hole         | u_          | al on top/horizontal at the bottom       |  | e on top/horizontal at the bottom      | ontal on top/flange at the bottom        |    |    |    |
|   | 1                |                                       |                               |                    |                     |  | orizontal on top/vertical at the bottom    |                         |            |              | ront double hole    | lange       | ertical on top/horizontal at the bottom  |  | lange on top/horizontal at the bottom  | orizontal on top/flange at the bottom    |    |    |    |
| Connection  Size 2  Short-circuit                     |                  | 1000 A                                | Vertical                      | Porizontal Company | Front double hole   | Vertical on top/horizontal at the bottom       | O Horizontal on top/vertical at the bottom | O Without guide frame   | 1 Vertical | Horizontal 5 | ω Front double hole | Plange 4    | Wertical on top/horizontal at the bottom | O Horizontal on top/vertical at the bottom   | Flange on top/horizontal at the bottom | ∞ Horizontal on top/flange at the bottom |    |    |    |
| Size 2  |                  | 1000 A<br>2000 A                      | Vertical                      | Horizontal         | Front double hole   | Vertical on top/horizontal at the bottom       |  | Without guide frame     | Vertical   | Horizontal   |                     |             |  | Horizontal on top/vertical at the bottom     |  | _  |    |    |    |
| Size 2<br>Short-circuit                               | D                | 2000 A<br>4000 A                      | 1 1 Vertical                  | 5 Horizontal       | E Front double hole | 2 G G Vertical on top/horizontal at the bottom | 6<br>6<br>6                                | O O Without guide frame | 1 Vertical | 2 Horizontal | 3<br>3<br>-         | 4<br>4<br>4 | 5<br>5<br>5                              | 9 9 Horizontal on top/vertical at the bottom | 7<br>7<br>7                            | 8<br>8<br>8                              |    |    |    |
| Size 2<br>Short-circuit                               | D                | 2000 A                                | 1 Uertical                    | 2 Horizontal       | E Front double hole | Use the polyhorizontal at the bottom           | 6<br>6                                     | O Without guide frame   | 1 Vertical | 5 Horizontal | 3                   | 4           | 5<br>5                                   | O Horizontal on top/vertical at the bottom   | 7                                      | 8  |    |    |    |

<sup>1) 1500</sup> V DC only for 4-pole circuit breakers and for breaking capacity E

<sup>&</sup>lt;sup>2)</sup> Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:

 $<sup>3 \</sup>times$  connected position,  $2 \times$  test position,  $1 \times$  disconnected position;

Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:

<sup>1</sup> x connected position, 1 x test position, 1 x disconnected position + message through communications interface for disconnected position and for "not available"

|  | 3   | 8WA1 5 6 7  | 8 9 10 11 12 13 14 15 1<br>-  | 6                          |
|--|---|---|---|----------------------------|
| Operating                                | mechanisms, au  | uxiliary switches   | and auxiliary releases  |                            |
| Operating mechanism and auxiliary switch | Manual recharging of the stored energy mechanism Recharging of the stored energy mechanism by spring charging motor (M)  Without closing coil With closing coil (CC/CC-CC for uninterrupted duty, 100 | Without spring charging motor  24 30 V DC  48 60 V DC  110 127 V AC/ 110 125 V DC  208 240 V AC/ 220 250 V DC                       | 2 NO, 2 NC 4 NO, 4 NC 2 NO, 2 NC 2 NO, 2 NC 4 NO, 4 NC 5 4 NO, 4 NC 5 2 NO, 2 NC 3 4 NO, 4 NC 7 2 NO, 2 NC 4 NO, 4 NC 7 2 NO, 2 NC 4 NO, 4 NC 8  A 24 30 V DC B C |                            |
|  | With closing coil (CC)<br>for momentary duty, 5% O  |   | 110 127 V AC/110 125 V DC  208 240 V AC/220 250 V DC  E  24 30 V DC  48 60 V DC  110 127 V AC/110 125 V DC  M  208 240 V AC/220 250 V DC  N                       |                            |
| 2nd auxiliary<br>release                 | Without 2nd auxiliary release<br>With shunt trip (ST),<br>uninterrupted duty 100% (   |   | 24 30 V DC B 48 60 V DC C 110 127 V AC/110 125 V DC D 208 240 V AC/220 250 V DC E   |                            |
|  | With shunt trip (ST),<br>momentary duty 5% OP   |   | 24 30 V DC F<br>48 60 V DC G<br>110 127 V AC/110 125 V DC H<br>208 240 V AC/220 250 V DC J  |                            |
|  | With undervoltage release instantaneous (≤ 0.08 s) a (≤ 0.2 s)  |   | 24 30 V DC L 48 60 V DC N 110 127 V AC/110 125 V DC P 208 240 V AC/220 250 V DC Q 380 415 V AC R  |                            |
|  | With undervoltage release adjustable delay 0.2 3.2  |   | 48 V DC S 60 V DC T 110 127 V AC/110 125 V DC U 208 240 V AC/220 250 V DC V 380 415 V AC W  |                            |
| 1st auxiliary releas                     | e   | Without 1st auxiliary release With shunt trip (ST/ST-COM) 1), uninterrupted duty 100% OP With shunt trip (ST), momentary duty 5% OP | 24 30 V DC  48 60 V DC  208 240 V AC/220 250 V DC  24 30 V DC   | 0<br>1<br>2<br>3<br>4<br>5 |
|  |   |   |   | 7<br>8                     |

If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.
 The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

To specify the options, add "-Z" to the complete article Order code number and indicate the appropriate order code(s). 3WA....-....-....-.... -Z Option plug for electronic trip unit To reduce the rated current of the circuit breaker Only one module is possible per circuit breaker. As standard, the electronic trip unit is equipped with an option plug which is equal to the maximum rated breaker current ( $I_{n \text{ max}}$ ) The rated current of the selected option plug must be less than  $I_{n,max}$ . Rated current I. ZS Option plug **B02** 315 A 400 A 500 A B05 630 A П 800 A 1000 A 1250 A 1600 A 2000 A **B20** 2500 A B25 3200 A B32 4000 A 5000 A IOM230 digital input/output module 1) Module with 2 inputs and 3 outputs A module including adapter for mounting on the secondary disconnect terminal system F23 of the circuit breaker, connecting cables and CubicleBUS<sup>2</sup> terminating resistor; five modules can be operated at the same time. Further modules must be ordered separately as 3WA9111-0EC11, which includes the adapter for mounting on the secondary disconnect terminal system of the circuit breaker and the adapter for external mounting ZSI200 Zone-selective interlocking module 1) Zone-selective interlocking with ETU600 A module, circuit breaker internal. A module including adapter for mounting on the F20 secondary disconnect terminal system of the circuit breaker, connecting cables and CubicleBUS<sup>2</sup> terminating resistor COM190 communications module 1) 2) · The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature PROFINET IO/Modbus TCP 2) A module including 2 Switched Ethernet ports, circuit breaker internal. A module F19 including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and CubicleBUS2 terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-0EC13. COM150 communications module 1) • The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature Modbus RTU A module with terminal connection and optional internal terminating resistor, circuit F15 breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and Cubicle BUS<sup>2</sup> terminating resistor: two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-0EC15. ready4COM circuit breakers without communication-capable closing coils/shunt trips If this option is used, remote switching directly via communication is no longer possible. M71 1) When ordering this option for a circuit breaker or a non-automatic air circuit breaker of the installation type "withdrawable version without guide frame", this must be used as the order option for the guide frame

<sup>2)</sup> For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

| To specify the options, add "-Z" to the conumber and indicate the appropriate or  | •                    |                                    | 3WA   | Z               | Order code |
|---|----------------------|------------------------------------|---|-----------------|------------|
| Automatic reset  Only possible for circuit breakers with an elect  Automatic reset                                      | Automatic reset of   |                                    | after ETU tripping; this option<br>note trip alarm reset coil RR. | is not required | K01        |
| Circuit breakers with a metering  | 3                    |                                    |   | former          |            |
| The circuit breaker is equipped with a metering   |                      |                                    | Scope of measured values  | PMF-I           | V61        |
| same as for the PMF metering function. Unlike this version is not certified according to IEC 67                         |                      | internal voltage tap,              | Metering function   | PMF-II          | V62        |
| External voltage transformers are required for     Only possible for circuit breakers of frame size the article number. | the function.        | A or C in position 9 of            |   | PMF-III         | V63        |
| Special approval according to U   | L 489b in addition   | to IEC 60947                       |   |                 |            |
| DC non-automatic circuit breakers   | Sizes 2, 4-pole, 200 | 00 A with $I_{cc} = 20 \text{ kA}$ |   |                 | U09        |
| up to 1500 V  | Available for:       | 3WA1220-8AU1                       | 2   |                 |            |
|   |                      | 3WA1220-8AU4                       | 1220-8AU42  |                 |            |
|   |                      | 3WA1220-8AU7                       | 2   |                 |            |
|   |                      | 3WA1220-8CU1                       | 2   |                 |            |
|   |                      | 3WA1220-8CU4                       | J42   |                 |            |
|   |                      | 3WA1220-8CU7                       |   |                 |            |

System overview, page 1/28

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

To specify the options, add "-Z" to the complete article Order code number and indicate the appropriate order code(s). 3WA....-....-....-.... -Z Rear main connections (top and bottom) with same pole spacing of phases (only possible for 4-pole circuit breakers with N pole, left) AC circuit breakers/ Sizes 2, 4-pole, 4000 A D04 breaking capacity S/M/H/E AC non-automatic circuit breakers and Rear Standard N - L1 160 mm AC guide frames vertical L1 - L2 130 mm L2 - L3 160 mm N - L1 130 mm Option L1 - L2 160 mm L2 - L3 160 mm Rear N - L1 160 mm Standard horizontal L1 - L2 130 mm L2 - L3 160 mm Option N - L1 130 mm L1 - L2 160 mm L2 - L3 160 mm Tinned version of the main circuit connections on the guide frame Only for withdrawable circuit breakers with horizontal connection or flange connection Cannot be ordered for circuit breakers without a guide frame The normal delivery time increases to 15 work days **Tinned connections** D08 Broadened vertical main circuit connection • Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately Main circuit connection For 3WA1, 4000 A, size 2 Compatible with 3WL1240 D01 for retrofit Circuit breakers without Bluetooth function Circuit breakers In this version of the circuit breaker, Bluetooth is not provided. Neither can Bluetooth be retrofitted D80 without Bluetooth function by replacing the electronic trip unit. Secondary disconnect terminal system · Can be ordered for circuit breakers with guide frames and for guide frames Manual connector with screw terminal N03 With screw connection instead of push-in connection (standard) Manual connector for ring lugs With screw connection for ring lugs instead of push-in connection (standard) N05 Mechanical operating cycles counters Mechanical operating cycles counter, Can be used with all circuit breakers and non-automatic circuit breakers including those without a C01 5-diait spring charging motor Signaling switches Trip alarm switch 2nd trip alarm switch (S25) 1 NO K06 1st trip alarm switch included as standard for circuit breakers. Can only be used with circuit breakers with an electronic

trip unit without ready4COM.

| To specify the options, add "-Z" to the comple number and indicate the appropriate order co  |   | 3WA  | Z  | Order code  |
|--|---|--|--|---|
| Pushbuttons/disconnect switches/clo  | osing lockouts/special packaging/ard  | chute co   | over   |   |
| Emergency OPEN button  | Mushroom pushbutton instead of the mechanical C   | FF pushbutto   | n  | C25   |
| Local electric close on operator panel (S10)   | This prevents unauthorized electrical closing from t<br>panel. Mechanical closing and remote closing rema<br>Only possible in combination with a closing coil (CC   | in possible.   | With sealing cap With CES lock                             | C11<br>C12  |
| Motor disconnect switch on operator panel (S12)  | This prevents automatic charging of the stored ener<br>by the spring charging motor   | rgy mechanisı  | n  | C24   |
| Cardboard packaging with water-repellent coating of  | on corrugated cardboard (moisture protection)   |  |  | P61   |
| Arc chute cover mounted on the guide frame   | Not available for:<br>— Fixed-mounted<br>— Breaking capacity C, E and D<br>— 3600/4000 A size 2   |  |  | R10   |
| Cover for electronic trip unit   | Top cover with safety lock<br>(The lower sealable cover of the rotary coding switc<br>of the circuit breaker)   | ch is included   | in the scope of supply                                     | F40   |
| Used in converter applications with high harmonic c     External 24 V DC supply required   |   |  |  |   |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> </ul>   |   |  |  | K60   |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> </ul>   | VR-t (15th position in article number: S, T, U, V, W)<br>4 V DC and warning labels<br>PMF-III metering function is feasible. The accuracy of<br>s. A certificate according to IEC 61557-12 cannot be p  |  |  | K60   |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> </ul>   | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers  | provided for th  |  | K60<br>S55  |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> </ul> Mechanical interlocks   | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame   | provided for th  |  | S55<br>R55  |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> </ul>   | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately)   | provided for th  |  | S55<br>R55<br>R56   |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul>  | VR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separate  | provided for th  |  | S55<br>R55  |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounts)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separated and withdrawable circuit breakers)   | orovided for th  | is version.  | S55<br>R55<br>R56<br>R57  |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> </ul>   | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separated and withdrawable circuit breakers)  ed and withdrawable circuit breaker  | orovided for the street of the | is version.  | S55<br>R55<br>R56<br>R57  |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounts)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separate ed and withdrawable circuit breaker Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit  | orovided for the street of the | s S  | S55<br>R55<br>R56<br>R57<br>S01<br>S03                                    |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounts)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separated and withdrawable circuit breakers)  ed and withdrawable circuit breaker  | orovided for the street of the | s<br>S<br>DN<br>t FORTRESS or CASTELL <sup>2)</sup>        | S55<br>R55<br>R56<br>R57<br>S01<br>S03<br>S05                             |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounts)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separate ed and withdrawable circuit breakers (breakers)  Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers   | torovided for the street of th | S S DN t FORTRESS or CASTELL 2) t for padlocks 3)          | S55<br>R55<br>R56<br>R57<br>S01<br>S03<br>S05<br>S07                      |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounts)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separate ed and withdrawable circuit breakers (breakers)  Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers   | ely)  Made by CE  Made by IKC  Assembly ki  Assembly ki  Made by RO  | S S DN t FORTRESS or CASTELL 2) t for padlocks 3) NIS      | S55<br>R55<br>R56<br>R57<br>S01<br>S03<br>S05                             |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounted Locking provisions)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separated and withdrawable circuit breaker) Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1   | torovided for the street of th | S S DN t FORTRESS or CASTELL 2) t for padlocks 3) NIS      | \$55<br>R55<br>R56<br>R57<br>\$01<br>\$03<br>\$05<br>\$07<br>\$08<br>\$09 |
| <ul> <li>Not possible with delayed undervoltage release L</li> <li>Additionally contains a relay for monitoring the 2</li> <li>If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounted Locking provisions)  | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separated and withdrawable circuit breakers (ordered separated and withdrawable circuit breakers)  Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1  For charging handle with padlock 3) | ely)  Made by CE  Made by IKC  Assembly ki  Assembly ki  Made by RO  | S S DN t FORTRESS or CASTELL 2) t for padlocks 3) NIS      | S55<br>R55<br>R56<br>R57<br>S01<br>S03<br>S05<br>S07<br>S08               |
| <ul> <li>Not possible with delayed undervoltage release L Additionally contains a relay for monitoring the 2 If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification.</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> <li>Locking provisions (for fixed-mounted Locking provisions)</li> <li>Locking provisions</li> <li>Locking provisions</li> <li>Locking provisions (for withdrawable Locking provision to prevent movement of the</li> </ul> | IVR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separated and withdrawable circuit breakers (ordered separated and withdrawable circuit breakers)  Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1  For charging handle with padlock 3) | ely)  Made by CE  Made by IKC  Assembly ki  Assembly ki  Made by RO  | S ON t FORTRESS or CASTELL 2) t for padlocks 3) NIS OFALUX | \$55<br>R55<br>R56<br>R57<br>\$01<br>\$03<br>\$05<br>\$07<br>\$08<br>\$09 |
| <ul> <li>Not possible with delayed undervoltage release L Additionally contains a relay for monitoring the 2 If Z option = K60 is provided, an optional PMF-I to accordance with the manufacturer's specification.</li> <li>Internal current sensors</li> <li>Mechanical interlocks</li> <li>Interlocking module with Bowden cable 2 m</li> <li>Mechanical interlocks</li> </ul> Locking provisions (for fixed-mounted Locking provisions) Locking provisions Locking provisions Locking provisions Locking provisions   | VR-t (15th position in article number: S, T, U, V, W) 4 V DC and warning labels PMF-III metering function is feasible. The accuracy of s. A certificate according to IEC 61557-12 cannot be p Sizes 1, 2, 3  For fixed-mounted breakers For withdrawable circuit breakers with guide frame For guide frames (ordered separately) For withdrawable circuit breakers (ordered separate ed and withdrawable circuit breaker (ordered separate panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1  For charging handle with padlock 3)  e circuit breaker)   | novided for the service of the servi | S ON t FORTRESS or CASTELL 2) t for padlocks 3) NIS OFALUX | \$55<br>R55<br>R56<br>R57<br>\$01<br>\$03<br>\$05<br>\$07<br>\$08<br>\$09 |

Not available in combination with R40
 Locks must be ordered from the manufacturer.
 Padlock not included in the scope of supply.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

To specify the options, add "-Z" to the complete article Order code number and indicate the appropriate order code(s). 3WA....-....-....-.... -Z Locking provisions against unauthorized closing, for withdrawable circuit breakers • The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced. Not possible in combination with order code "R81", "R85" or "R86". Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately Made by CES Made by RONIS Made by PROFALUX Locking mechanisms • R30 and R50 not possible in combination with order code "R81", "R85" or "R86". R30 and R50 only possible on complete order for a circuit breaker with a guide frame or when ordering the guide frame separately R40 can only be ordered with the circuit breaker For fixed-mounted circuit breakers To prevent opening of the control cabinet door in ON position For withdrawable circuit breakers To prevent opening of the control cabinet door in connected position To prevent activation when the control cabinet door is open 1) R40 To prevent movement when the control cabinet door is open 2) Locking provisions to prevent movement of the withdrawable circuit breaker in disconnected position · Consisting of Bowden cable and lock in the control cabinet door Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60" Only possible for a complete order for a circuit breaker with a guide frame or when ordering the guide frame separately Made by CES Made by PROFALUX Made by RONIS Increased degree of protection for installation in a control cabinet Door sealing frame for degree of protection IP41

<sup>1)</sup> Not available in combination with R50 and R55

<sup>2)</sup> Not available in combination with R40

1

System overview, page 1/28 Siemens LV 10 · 2025 1/51

## Further technical specifications

| Manual operating mechanism                       | 3WA11 – 3WA13 |
|--|---------------|
| Switching on/charging energy store               |               |
| Maximum force required to operate the hand lever | ≤ 230 N       |
| Required number of strokes on the hand lever     | 9             |
|  |               |

| Required number of strokes on the hand lever            |  | 9                             |              |
|---|--|-------------------------------|--------------|
| SI : " (SSISS SOLD 1)                                   |  |                               |              |
| Closing coils (CC/CC-COM) 1)                            |  | 3WA11 – 3WA13                 |              |
| Rated operational voltage                               |  |                               |              |
| Rated control supply voltage $U_{\rm s}$                |  | 24 30 V DC                    |              |
|   |  | 48 60 V DC                    |              |
|   |  | 110 127 V AC/110 125 V        |              |
|   |  | 208 240 V AC/220 250 V        | V DC         |
| Primary operating range                                 |  |                               |              |
| Primary operating range (acc. to IEC 60947-2)           |  | 75 110% <i>U</i> <sub>s</sub> |              |
| Extended operating range for battery operation          |  | 75 126% U <sub>s</sub>        |              |
| Integrated freewheeling diode                           |  | Yes                           | No           |
| Operation   |  |                               |              |
| Version   |  | 100% OP                       | 5% OP        |
| Closing power   | AC/DC                                  | 60 VA/60 W                    | 300 VA/300 W |
| Continuous power  | AC/DC                                  | 8 VA/8 W                      | -            |
| Minimum command time at 100% $U_{\rm s}$                |  | 60 ms                         | 60 ms        |
| Maximum command time at 100% $U_{\rm s}$                |  | -                             | 2000 ms      |
| Opening time of the circuit breaker at 100% $U_s$       |  | 80 ms                         | 50 ms        |
| Fuse protection of the control circuit at $U_s$ for clo |  |                               |              |
| Fuse gG   | 24 30 V DC                             | 2 A                           | 10 A         |
|   | 48 60 V DC                             | 2 A                           | 10 A         |
|   | 110 127 V AC/110 125 V DC              | 2 A                           | 4 A          |
|   | 208 240 V AC/220 250 V DC              | 2 A                           | 2 A          |
| Automatic circuit breaker with C characteristic         | 24 30 V DC                             | 2 A                           | 10 A         |
|   | 48 60 V DC                             | 2 A                           | 10 A         |
|   | 110 127 V AC/110 125 V DC              | 2 A                           | 4 A          |
|   | 208 240 V AC/220 250 V DC              | 2 A                           | 2 A          |
| Fuse protection of the control circuit at $U_s$ for sp  | oring charging motor + closing coil 2) |                               |              |
| Fuse gG   | 24 30 V DC                             | 8 A                           | 10 A         |
|   | 48 60 V DC                             | 8 A                           | 10 A         |
|   | 110 127 V AC/110 125 V DC              | 4 A                           | 4 A          |
|   | 208 240 V AC/220 250 V DC              | 4 A                           | 2 A          |
| Automatic circuit breaker with C characteristic         | 24 30 V DC                             | 8 A                           | 10 A         |
|   | 40 COVDC                               | 0.4                           | 10.4         |

Technical specifications also apply to 3WL see page 1/106
 With the same control circuit for the closing coil and spring charging motor

| Spring charging motor 1)                       |       | 3WA11 – 3WA13                 |  |
|--|-------|-------------------------------|--|
| Rated operational voltage                      |       |                               |  |
| Rated control supply voltage $U_s$             |       | 24 30 V DC                    |  |
|  |       | 48 60 V DC                    |  |
|  |       | 110 127 V AC/110 125 V DC     |  |
|  |       | 208 240 V AC/220 250 V DC     |  |
| Primary operating range                        |       |                               |  |
| Primary operating range (acc. to IEC 60947-2)  |       | 85 110% <i>U</i> <sub>s</sub> |  |
| Extended operating range for battery operation |       | 85 126% U <sub>s</sub>        |  |
| Operation                                      |       |                               |  |
| Closing power                                  | AC/DC | 135 VA/135 W                  |  |
| Continuous power                               | AC/DC | 135 VA/135 W                  |  |
| Charging time at 100% $U_{\rm s}$              |       | ≤ 10 s                        |  |

110 ... 127 V AC/110 ... 125 V DC

208 ... 240 V AC/220 ... 250 V DC

4 A

4 A

4 A

2 A

<sup>1)</sup> Technical specifications also apply to 3WL see page 1/106

| Spring charging motor 1)                                |   | 3WA11 – 3WA13 |  |
|---|---|---------------|--|
| Fuse protection of the control circuit at $U_s$ for spr | Fuse protection of the control circuit at $U_s$ for spring charging motor |               |  |
| Fuse gG   | 24 30 V DC  | 6 A           |  |
|   | 48 60 V DC  | 6 A           |  |
|   | 110 127 V AC/110 125 V DC   | 2 A           |  |
| <u></u>   | 208 240 V AC/220 250 V DC   | 2 A           |  |
| Automatic circuit breaker with C characteristic         | 24 30 V DC  | 6 A           |  |
|   | 48 60 V DC  | 6 A           |  |
|   | 110 127 V AC/110 125 V DC   | 2 A           |  |
|   | 208 240 V AC/220 250 V DC   | 2 A           |  |

<sup>1)</sup> Technical specifications also apply to 3WL see page 1/106

| Undervoltage releases UVR and UVR-t 1)                                |                                       | 3WA11 – 3WA13   |  |
|---|---------------------------------------|---|--|
| Rated operational voltage   |                                       |   |  |
| Rated control supply voltage $U_{\rm s}$ : UVR                        |                                       | 24 30 V DC  |  |
|   |                                       | 48 60 V DC  |  |
|   |                                       | 110 127 V AC/110 125 V DC   |  |
|   |                                       | 208 240 V AC/220 250 V DC   |  |
|   |                                       | 380 415 V AC  |  |
| Rated control supply voltage U <sub>s</sub> : UVR-t <sup>2)</sup>     |                                       | 48 V DC   |  |
|   |                                       | 60 V DC   |  |
|   |                                       | 110 127 V AC/110 125 V DC   |  |
|   |                                       | 208 240 V AC/220 250 V DC   |  |
|   |                                       | 380 415 V AC  |  |
| Operating limits  | Operate voltage                       | < 7% U <sub>s</sub>   |  |
|   | Pick-up voltage                       | 85 126% U <sub>s</sub>  |  |
| Integrated freewheeling diode   |                                       | Yes   |  |
| Closing power   | AC/DC                                 | 60 VA/50 W  |  |
| Continuous power  | AC/DC                                 | 5 VA/5 W  |  |
| Break time  |                                       |   |  |
| $U_s = 0$ with UVR instantaneous                                      |                                       | ≤ 80 ms   |  |
| $U_{\rm s} = 0$ with UVR short-time delayed                           |                                       | ≤ 200 ms  |  |
| $U_{\rm s} = 0$ with UVR-t delayed                                    |                                       | 0.2 3.2 s   |  |
| With UVR-t by disconnection at terminals X5.13 ar (quick shutdown) 2) | nd X5.14 (EMERGENCY-STOP circuit)     | ≤ 100 ms (maximum allowable cable length between the terminals)/cable length ≤ 50 m |  |
| Fuse protection of the control circuit                                |                                       |   |  |
| Fuse gG   | 24 30 V DC (UVR)                      | 2 A   |  |
|   | 48 60 V DC (UVR)                      | 2 A   |  |
|   | 48 V DC (UVR-t)                       | 2 A   |  |
|   | 60 V DC (UVR-t)                       | 2 A   |  |
|   | 110 127 V AC/110 125 V DC             | 2 A   |  |
|   | 208 240 V AC/220 250 V DC             | 2 A   |  |
|   | 380 415 V AC                          | 2 A   |  |
| Automatic circuit breaker with C characteristic                       | 24 30 V DC (UVR)                      | 4 A   |  |
|   | 48 60 V DC (UVR)                      | 4 A   |  |
|   | 48 V DC (UVR-t)                       | 4 A   |  |
|   | 60 V DC (UVR-t)                       | 4 A   |  |
|   | 110 127 V AC/110 125 V DC             | 4 A   |  |
|   | 208 240 V AC/220 250 V DC             | 6 A   |  |
|   | 380 415 V AC                          | 6 A   |  |
| Automatic circuit breaker with D characteristic                       | 24 30 V DC (UVR)                      | 2 A   |  |
| Automatic circuit breaker with D characteristic                       | 48 60 V DC (UVR)                      | 2 A   |  |
|   | 48 V DC (UVR-t)                       | 2 A   |  |
|   | 60 V DC (UVR-t)                       | 2 A   |  |
|   | · · · · · · · · · · · · · · · · · · · | 2 A   |  |
|   | 110 127 V AC/110 125 V DC             |   |  |
|   | 208 240 V AC/220 250 V DC             | 4 A   |  |
|   | 380 415 V AC                          | 4 A   |  |

System overview, page 1/28

Technical specifications also apply to 3WL see page 1/106
 The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

## Further technical specifications

| Shunt trip (ST/ST-COM/ST2) 1)                        |                           | 3WA11 – 3WA13          |              |
|--|---------------------------|------------------------|--------------|
| Rated operational voltage                            |                           |                        |              |
| Rated control supply voltage $U_s$                   |                           | 24 30 V DC             |              |
|  |                           | 48 60 V DC             |              |
|  |                           | 110 127 V AC/110 12!   | 5 V DC       |
|  |                           | 208 240 V AC/220 250   | 0 V DC       |
| Primary operating range                              |                           |                        |              |
| Primary operating range (acc. to IEC 60947-2)        |                           | 75 110% U <sub>s</sub> |              |
| Extended operating range for battery operation       |                           | 75 126% U <sub>s</sub> |              |
| Integrated freewheeling diode                        |                           | Yes                    | No           |
| Operation  |                           |                        |              |
| Version  |                           | 100% OP                | 5% OP        |
| Closing power AC/DC                                  | 24 30 V DC, 48 60 V DC    | 60 VA/60 W             | 300 VA/300 W |
|  | 110 127 V AC/110 125 V DC |                        |              |
|  | 208 240 V AC/220 250 V DC |                        |              |
| Continuous power AC/DC                               |                           | 8 VA/8 W               |              |
| Minimum command time at 100% $U_{\rm s}$             |                           | 60 ms                  | 60 ms        |
| Maximum command time at 100% $U_{\rm s}$             |                           | -                      | 2000 ms      |
| Make time of the circuit breaker at 100% $U_{\rm s}$ |                           | 80 ms                  | 50 ms        |
| Fuse protection of the control circuit               |                           |                        |              |
| Fuse gG  | 24 30 V DC                | 2 A                    | 10 A         |
|  | 48 60 V DC                | 2 A                    | 10 A         |
|  | 110 127 V AC/110 125 V DC | 2 A                    | 4 A          |
|  | 208 240 V AC/220 250 V DC | 2 A                    | 2 A          |
| Automatic circuit breaker with C characteristic      | 24 30 V DC                | 2 A                    | 10 A         |
|  | 48 60 V DC                | 2 A                    | 10 A         |
|  | 110 127 V AC/110 125 V DC | 2 A                    | 4 A          |
|  | 208 240 V AC/220 250 V DC | 2 A                    | 2 A          |

<sup>1)</sup> Technical specifications also apply to 3WL see page 1/106

## Remote trip alarm reset coil for mechanical tripped indicator (F7) 1)

| indicator (F7) 1)                               |                            | 3WA11 – 3WA13                 |
|---|----------------------------|-------------------------------|
| Rated operational voltage                       |                            |                               |
| Rated control supply voltage $U_s$              |                            | 24 30 V DC                    |
|   |                            | 48 60 V DC                    |
|   |                            | 110 125 V DC/110 127 V AC     |
|   |                            | 220 250 V DC/208 240 V AC     |
| Primary operating range                         |                            |                               |
| Primary operating range (acc. to IEC 60947-2)   |                            | 85 110% <i>U</i> <sub>s</sub> |
| Operation                                       |                            |                               |
| Power consumption                               | AC/DC                      | 60 VA/60 W                    |
| Minimum command time at $1 \times U_s$          |                            | 60 ms                         |
| Fuse protection of the control circuit          |                            |                               |
| Fuse gG   | 24 30 V DC                 | 2 A                           |
|   | 48 60 V DC                 |                               |
|   | 110 127 V AC /110 125 V DC | 1 A                           |
|   | 208 240 V AC /220 250 V DC |                               |
| Automatic circuit breaker with C characteristic | 24 30 V DC                 | 2 A                           |
|   | 48 60 V DC                 |                               |
|   | 110 127 V AC/110 125 V DC  | 1 A                           |
|   | 208 240 V AC/220 250 V DC  |                               |

<sup>1)</sup> Technical specifications also apply to 3WL see page 1/106

#### Contact position-driven auxiliary switches (S1 bis S8) 1)

| contact position driven duxinary switches (51 bis 50) | SWATT - SWATS              |
|---|----------------------------|
|   |                            |
| Туре  | NO or NC                   |
| Contact reliability                                   | From 1 mA at 5 V DC        |
| Rated insulation voltage $U_i$                        | 660 V DC/660 V AC 50/60 Hz |
| Rated impulse withstand voltage $U_{\rm imp}$         | 6 kV                       |

<sup>1)</sup> Technical specifications also apply to 3WL see page 1/106

| Contact position-driven au               | xiliary switches (S1 bis S8) 1) | 3WA11 - 3WA13 |       |
|--|---------------------------------|---------------|-------|
| Breaking capacity                        |                                 |               |       |
| Rated operational current I <sub>e</sub> | DC12                            | 24 V          | 10 A  |
|  |                                 | 48 V          | 8 A   |
|  |                                 | 110 V         | 3.5 A |
|  |                                 | 220/240 V     | 1 A   |
|  | DC13                            | 24 V          | 6 A   |
|  |                                 | 48 V          | 4 A   |
|  |                                 | 110 V         | 1.2 A |
|  |                                 | 220/240 V     | 0.4 A |
|  |                                 | 440 V         | 0.2 A |
|  | AC12                            | ≤ 660 V       | 10 A  |
|  | AC15                            | ≤ 230 V       | 6 A   |
|  |                                 | 400 V         | 4 A   |
|  |                                 | 500 V         | 3 A   |
|  |                                 | 690 V         | 2 A   |

<sup>1)</sup> Technical specifications also apply to 3WL see page 1/106

## Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

#### 3WA11 - 3WA13

| •  |         |                        |        |
|--|---------|------------------------|--------|
| Гуре   |         | NO contact             |        |
| Contact reliability                            |         | From 1 mA at 5 V DC 1) |        |
| Rated insulation voltage <i>U</i> <sub>i</sub> |         | 250 V DC/250 V AC      |        |
| Breaking capacity                              |         |                        |        |
| Rated operational current I <sub>e</sub>       | DC12    | 24 V                   | 5 A    |
|  |         | 60 V                   | 0.4 A  |
|  |         | 110/127 V              | 0.4 A  |
|  |         | 220/240 V              | 0.2 A  |
|  | DC13    | 24 V                   | 2.5 A  |
|  |         | 60 V                   | 0.22 A |
|  |         | 110/127 V              | 0.22 A |
|  |         | 220/240 V              | 0.1 A  |
|  | AC12    | ≤ 240 V                | 6 A    |
|  | A300 AC | ≤ 250 V                | 6 A    |
|  | R300 DC | 110 125 V              | 0.22 A |
|  |         | 220 240 V              | 0.11 A |
|  | AC15    | 220 V                  | 5 A    |
|  |         | 240 V                  | 4 A    |

#### Trip alarm switches (S24, S25)

#### 3WA11 - 3WA12

| 1st trip alarm switch S24 |                            |   |
|---------------------------|----------------------------|---|
|                           |                            |   |
|                           |                            |   |
|                           |                            |   |
| DC12                      | 24 V                       | 5 A   |
|                           | 60 V                       | 0.4 A   |
|                           | 110/127 V                  | 0.4 A   |
|                           | 220/240 V                  | 0.2 A   |
| DC13                      | 24 V                       | 2.5 A   |
|                           | 60 V                       | 0.2 A   |
|                           | 110/127 V                  | 0.2 A   |
|                           | 220/240 V                  | 0.1 A   |
| AC12                      | ≤ 240 V                    | 6 A   |
| A300 AC                   | ≤ 250 V                    | 6 A   |
| R300 DC                   | 110 125 V                  | 0.22 A  |
|                           | 220 240 V                  | 0.11 A  |
| AC15                      | 220 V                      | 5 A   |
|                           | 240 V                      | 4 A   |
|                           | AC12<br>A300 AC<br>R300 DC | $\begin{array}{c} DC12 & 24  \text{V} \\ 60  \text{V} \\ 110/127  \text{V} \\ 220/240  \text{V} \\ \\ DC13 & 24  \text{V} \\ 60  \text{V} \\ 110/127  \text{V} \\ 220/240  \text{V} \\ \\ AC12 & \leq 240  \text{V} \\ A300  AC & \leq 250  \text{V} \\ R300  DC & 110 \dots 125  \text{V} \\ 220 \dots 240  \text{V} \\ \\ AC15 & 220  \text{V} \\ \\ \end{array}$ |

To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

## Further technical specifications

| Position signaling switches on guide frame 1) |                            |            | 3WA11 – 3WA13   |                                     |  |  |
|---|----------------------------|------------|---|-------------------------------------|--|--|
|   |                            |            |   |                                     |  |  |
| Туре  |                            |            | Changeover contact (not COM)  |                                     |  |  |
| Contact reliability from                      | 1)                         |            | 1 mA at 5 V DC  |                                     |  |  |
| Rated insulation voltag                       | e U <sub>i</sub>           |            | 250 V, 50/60 Hz   |                                     |  |  |
| Rated impulse withstar                        | nd voltage $U_{\rm imp}$   |            | 4 kV  |                                     |  |  |
| Connection type                               |                            |            |   |                                     |  |  |
| PSS321  |                            |            | Spring-loaded terminal  | or push-in (depending on version)   |  |  |
| PSS600  |                            |            | Push-in   |                                     |  |  |
| PSS111 COM                                    |                            |            | <ul><li>COM contacts: Push-</li><li>Other contacts: Sprir</li></ul> | in<br>ng-loaded terminal or push-in |  |  |
| PSS400 COM                                    |                            |            | Push-in   |                                     |  |  |
| Conductor cross-section                       | on that can be connected b | y customer |   |                                     |  |  |
| Spring-type terminals                         |                            |            | 1 × 0,2 mm <sup>2</sup> (AWG 28) 1 × 2,5 mm <sup>2</sup> (AWG 14)   |                                     |  |  |
| Push-in solid                                 |                            |            | 1 × 0,5 mm <sup>2</sup> (AWG 20) 1 × 2,5 mm <sup>2</sup> (AWG 14)   |                                     |  |  |
| Push-in finely stranded                       | with end sleeve            |            | 1 × 0,5 mm <sup>2</sup> (AWG 20) 1 × 1,5 mm <sup>2</sup> (AWG 16)   |                                     |  |  |
| Breaking capacity                             |                            |            |   |                                     |  |  |
| Rated operational                             | Utilization category       | DC12       | 24 V  | 5 A                                 |  |  |
| current I <sub>e</sub>                        | according to               |            | 60 V  | 0.4 A                               |  |  |
|   | IEC 60947-5                |            | 127 V   | 0.4 A                               |  |  |
|   |                            |            | 220/240 V   | 0.2 A                               |  |  |
|   |                            | DC13       | 24 V  | 2.5 A                               |  |  |
|   |                            |            | 60 V  | 0.22 A                              |  |  |
|   |                            |            | 127 V   | 0.22 A                              |  |  |
|   |                            |            | 250 V   | 0.2 A                               |  |  |
|   |                            | AC12       | ≤ 240 V AC  | 6 A                                 |  |  |
|   |                            | AC15       | 250 V   | 4 A                                 |  |  |
|   |                            |            | 220 V   | 5 A                                 |  |  |

The COM (X89) contacts may only be connected to the communications module.

ETU600 3WA11 – 3WA13

| Power supply                        |    |                      |
|-------------------------------------|----|----------------------|
| Method of power supply              |    | Power supply unit DC |
| DC power supply unit                |    | IEC 61558 SELV/PELV  |
| Rated control supply voltage $U_s$  | DC | 24 V                 |
| Primary operating range             |    | U <sub>s</sub> ±20%  |
| Power consumption                   |    | 2.9 W                |
| Max. current consumption            |    | 0.12 A               |
| Max. starting current               |    | 0.35 A               |
| Overvoltage category                |    | CATI                 |
| Integrated short-circuit protection |    | Yes                  |
| Protected against polarity reversal |    | Yes                  |

<sup>&</sup>lt;sup>1)</sup> To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.


# Summary of power consumption data

| Composants                        | Voltage  | Power consumption  |
|-----------------------------------|--|--|
| ETU600                            | 24 V DC  | 2.9 W  |
| Closing coil CC/CC-COM 100% OP    | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC                                 | 60 W<br>60 W<br>60 VA/60 W<br>60 VA/60 W                 |
| Closing coil CC/CC-COM 5% OP      | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC                                 | 300 W<br>300 W<br>300 VA/300 W<br>300 VA/300 W           |
| Shunt trip ST/ST-COM 100% OP      | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC                                 | 60 W<br>60 W<br>60 VA/60 W<br>60 VA/60 W                 |
| Shunt trip ST/ST-COM 5% OP        | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC                                 | 300 W<br>300 W<br>300 VA/300 W<br>300 VA/300 W           |
| Spring charging motors            | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC                                 | 135 W<br>135 W<br>135 VA/135 W<br>135 VA/135 W           |
| Remote trip alarm reset coils     | 24 30 V DC<br>48 60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC                                 | 60 W<br>60 W<br>60 VA/60 W<br>60 VA/60 W                 |
| Undervoltage releases (UVR/UVR-t) | 24 V DC<br>30 V DC<br>48 V DC<br>60 V DC<br>110 127 V AC/110 125 V DC<br>208 240 V AC/220 250 V DC<br>380 415 V AC | 50 W<br>50 W<br>50 W<br>50 W<br>60 VA/50 W<br>60 VA/50 W |
| IOM230                            | 24 V DC  | 1.25 W   |
| IOM350                            | 24 V DC  | 1.25 W   |
| COM190/COM150                     | 24 V DC  | 1.7 W  |

System overview, page 1/28

## Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your guide frame, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

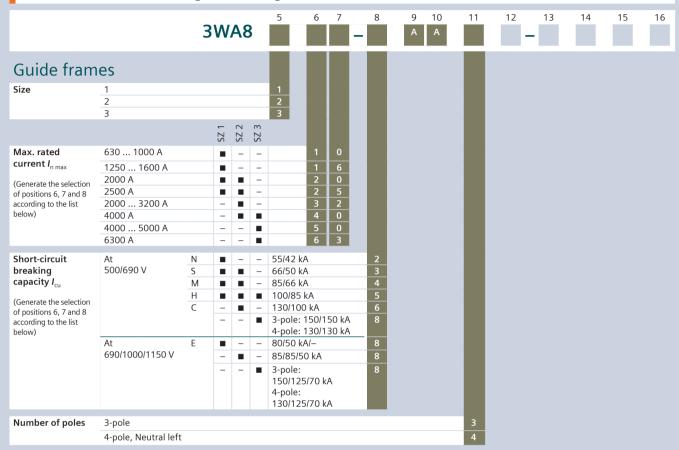

#### The following combinations of positions 6, 7 and 8 of the article number are technically feasible

|      | J                                       |       |                        | •      |        |        |        |        |        |        | ,      |        |
|------|---|-------|------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Size | Breaking capacity at I <sub>n max</sub> | 630 A | 800 A                  | 1000 A | 1250 A | 1600 A | 2000 A | 2500 A | 3200 A | 4000 A | 5000 A | 6300 A |
|      |   |       | Representation 6, 7, 8 |        |        |        |        |        |        |        |        |        |
| 1    | N                                       | 10-2  | 10-2                   | 10-2   | 16-2   | 16-2   | 20-3   | 25-3   | -      | -      | -      | -      |
|      | S                                       | 10-3  | 10-3                   | 10-3   | 16-3   | 16-3   | 20-3   | 25-3   | -      | -      | -      | -      |
|      | M                                       | 20-4  | 20-4                   | 20-4   | 20-4   | 20-4   | 20-4   | 25-4   | -      | -      | -      | -      |
|      | Н                                       | 20-5  | 20-5                   | 20-5   | 20-5   | 20-5   | 20-5   | 25-5   | -      | -      | -      | -      |
|      | E                                       | 20-8  | 20-8                   | 20-8   | 20-8   | 20-8   | 20-8   | 25-8   | -      | -      | -      | -      |
| 2    | S                                       | -     | -                      | -      | -      | -      | 20-5   | 25-5   | 32-5   | 40-5   | -      | -      |
|      | M                                       | -     | -                      | -      | -      | -      | 20-5   | 25-5   | 32-5   | 40-5   | -      | -      |
|      | Н                                       | -     | -                      | -      | -      | -      | 20-5   | 25-5   | 32-5   | 40-5   | -      | -      |
|      | E                                       | -     | -                      | -      | -      | -      | 20-8   | 25-8   | 32-8   | 40-8   | -      | -      |
|      | C                                       | -     | -                      | -      | -      | -      | 32-6   | 32-6   | 32-6   | -      | -      | -      |
| 3    | Н                                       | -     | -                      | -      | -      | -      | -      | -      | -      | 40-5   | 50-5   | 63-5   |
|      | E                                       | -     | -                      | -      | -      | -      | -      | -      | -      | 50-8   | 50-8   | 63-8   |
|      | С                                       | -     | -                      | -      | -      | -      | -      | -      | -      | 50-8   | 50-8   | 63-8   |

|  | 3WA8               | 5  | 6 7 | 8                          | _   | 9<br>A                     | 10<br>A                         |  | 11                                       |  | 12                                     | 13 | 14 | 15 | 16 |
|--|--------------------|--|-----|----------------------------|---|----------------------------|---------------------------------|--|--|--|--|----|----|----|----|
| Connection                                   | 1                  |  |     | With                       | ndraw   | able                       |                                 |  |  |  |  |    |    |    |    |
| Size 1                                       |                    |  |     | Vertical                   | Horizontal                                    | Front double hole          | Flange                          | Vertical on top/horizontal at the bottom | Horizontal on top/vertical at the bottom | Flange on top/horizontal at the bottom | Horizontal on top/flange at the bottom |    |    |    |    |
| Short-circuit<br>Breaking capacity           | N, S, M, E         | 630 A<br>800 A<br>1000 A<br>1250 A<br>1600 A<br>2000 A<br>2500 A             |     | 1<br>1<br>1<br>1<br>1<br>1 | 2<br>2<br>2<br>2<br>2<br>2<br>2               | 3<br>3<br>3<br>3<br>3<br>- | 4<br>4<br>4<br>4<br>4<br>4<br>- | 5<br>5<br>5<br>5<br>5<br>-               | 6<br>6<br>6<br>6<br>6<br>-               | 7<br>7<br>7<br>7<br>7<br>7             | 8<br>8<br>8<br>8<br>8                  |    |    |    |    |
|  | Н                  | 630 A<br>800 A<br>1000 A<br>1250 A<br>1600 A<br>2000 A<br>2500 A             |     | 1<br>1<br>1<br>1<br>1<br>1 | 2<br>2<br>2<br>2<br>2<br>2<br>-               | -<br>-<br>-<br>-<br>-      | 4<br>4<br>4<br>4<br>4<br>4      | 5<br>5<br>5<br>5<br>5<br>-               | 6<br>6<br>6<br>6<br>6<br>-               | 7<br>7<br>7<br>7<br>7<br>7             | 8<br>8<br>8<br>8<br>8                  |    |    |    |    |
| Size 2<br>Short-circuit<br>Breaking capacity | S, M, H, E         | 2000 A<br>2500 A<br>3200 A<br>3600 A<br>4000 A<br>2000 A<br>2500 A<br>3200 A |     | 1 1 1 1 - 1 1 1 1 1 1 1    | 2<br>2<br>2<br>-<br>2 <sup>2)</sup><br>2<br>2 | 3 3                        | 4<br>4<br>4<br>4<br>-<br>4<br>4 | 5<br>5<br>5<br>-<br>5<br>5<br>5          | 6<br>6<br>6<br>-<br>6<br>6<br>6          | 7<br>7<br>7<br>-<br>-<br>7<br>7        | 8<br>8<br>8<br>-<br>-<br>8<br>7        |    |    |    |    |
| Size 3<br>Short-circuit<br>Breaking capacity | н                  | 4000 A<br>5000 A<br>6300 A   |     | 1 1 1                      | 2 2 -   | 3 -                        | 4                               | 5<br>5<br>–                              | 6<br>6<br>–                              | _<br>_<br>_                            | _<br>_<br>_                            |    |    |    |    |
|  | E, C <sup>3)</sup> | 4000 A<br>5000 A<br>6300 A   |     | 1<br>1<br>1                | 2 2 -   | -<br>-<br>-                | 4<br>-<br>-                     | 5<br>5<br>–                              | 6<br>6<br>–                              | _<br>_<br>_                            | _<br>_<br>_                            |    |    |    |    |


The 4000 A vertical connections for the 3WA1 have different dimensions from the 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.
 Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).
 130 kA for 4-pole circuit breakers

## Guide frames for AC

|  | 3WA8   |                    | 9 10 11 12 13<br>A A D D D D   | 14 1 | 5 16 |  |  |  |
|--|--|--------------------|--|------|------|--|--|--|
|  |  |                    |  |      |      |  |  |  |
| Push-in connection 1)                                | SZ 1, SZ 2, SZ 3   | X7, X6, X5         | Non-automatic circuit breakers without ready4COM feature                                   | A    |      |  |  |  |
|  |  | X8, X7, X6, X5     | Circuit breakers/non-automatic<br>circuit breakers with<br>ready4COM feature               | В    |      |  |  |  |
|  | SZ 2, SZ 3   | X9, X8, X7, X6, X5 | Including external trip controller<br>ETC600 for circuit breakers with<br>ETU600 LSIG Hi-Z | К    |      |  |  |  |
| Position signaling Without position signaling switch |  |                    |  |      |      |  |  |  |
| switch   | Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)   |                    |  |      |      |  |  |  |
|  | Position signaling switch PSS-COM (1 $\times$ connected position, 1 $\times$ test position, 1 $\times$ disconnected position) plus connection to a communications module |                    |  |      |      |  |  |  |

<sup>1)</sup> Conversion to screw connection is possible with Z option NO3.

## Guide frames for DC

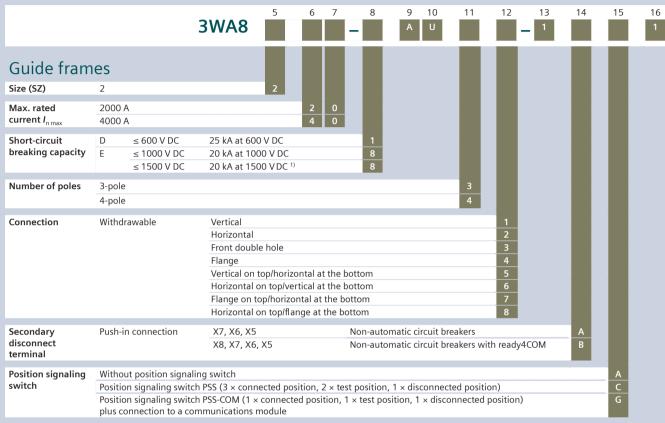

<sup>1) 1500</sup> V DC applications only possible with 4-pole circuit breakers and breaking capacity E.

# Accessories and spare parts

| Accessories for ele         | ectronic trip unit  |                              |           |           |                              |        |  |
|-----------------------------|---|------------------------------|-----------|-----------|------------------------------|--------|--|
| Electronic trip unit        |   |                              |           |           |                              |        |  |
| 3 137                       | <ul> <li>Note: The electronic trip unit is supplied without an option plug.</li> <li>The option plug must be ordered separately. The range of functions of the ETU600 corresponds to the "Current metering" application package.</li> </ul> |                              |           |           |                              |        |  |
| 0 0 0                       | Basic protective functions  |                              |           |           | Article No.                  |        |  |
|                             | ETU300 LSI/LSIG   |                              |           |           | 3WA9111-0EE3                 | 32     |  |
|                             | ETU600 LSI/LSIG   |                              |           |           | 3WA9111-0EE6                 | 52     |  |
|                             | ETU600 LSIG Hi-Z  |                              |           |           | 3WA9111-0EE6                 | 53     |  |
| Spare part battery for ETI  | J600  |                              |           |           |                              |        |  |
|                             |   |                              |           |           | Article No.                  |        |  |
| U                           |   |                              |           |           | 3WA9111-0EE8                 | 31     |  |
| Option plug                 |   |                              | C7.4      |           |                              |        |  |
| MEATERN                     | Basic configuration   | Rated current I <sub>n</sub> | SZ 1 :    | SZ 2 SZ   | 3 Article No.                | _      |  |
| IS 250A                     | Protective function LSI: LT, ST, INST   |                              |           |           | 3WA9111-0EB                  |        |  |
|                             | Protective function LSIG: LT, ST, INST, GF (ground-fault protection GFx with extended setting range)  |                              |           |           | 3WA9111-0EX                  |        |  |
|                             |   | 250 A                        |           | -         |                              | 02     |  |
|                             |   | 315 A                        |           | -         |                              | 03     |  |
|                             |   | 400 A                        |           | -         |                              | 04     |  |
|                             |   | 500 A                        |           | -         |                              | 05     |  |
|                             |   | 630 A                        |           | -         |                              | 06     |  |
|                             |   | 800 A                        |           |           |                              | 08     |  |
|                             |   | 1000 A                       |           |           |                              | 10     |  |
|                             |   | 1250 A                       |           |           |                              | 12     |  |
|                             |   | 1600 A                       |           |           |                              | 16     |  |
|                             |   | 2000 A                       |           |           |                              | 20     |  |
|                             |   | 2500 A                       |           |           |                              | 25     |  |
|                             |   | 3200 A                       | -         |           |                              | 32     |  |
|                             |   | 4000 A                       | -         |           |                              | 40     |  |
|                             |   | 5000 A                       | -         | -         |                              | 50     |  |
|                             |   | 6300 A                       | -         | - •       |                              | 63     |  |
| Function packages for ET    |   |                              |           |           |                              |        |  |
|                             | Protective and alarm functions  |                              |           |           | Article No.                  |        |  |
| **                          | Ground fault alarm (GF alarm)   |                              |           |           | 3WA9111-0ESC                 |        |  |
|                             | Directional short-time-delayed short-circuit protection (dST  | and reverse power protect    | ion (RP)  | 1)        | 3WA9111-0ES05                |        |  |
|                             | Enhanced protective functions (EPF) 1)  | Article No.                  |           |           |                              |        |  |
|                             | Full package with unbalance, voltage, active power, freque  | ency, THD and phase sequen   | ce detect | tion      | 3WA9111-0ES1                 |        |  |
|                             | Phase unbalance current and phase unbalance voltage   |                              |           |           | 3WA9111-0ES1                 |        |  |
|                             | Undervoltage and overvoltage  |                              |           |           | 3WA9111-0ES1                 |        |  |
|                             | Active power import and active power export   |                              |           |           | 3WA9111-0ES1                 |        |  |
|                             | Underfrequency and overfrequency  |                              |           |           | 3WA9111-0ES1<br>3WA9111-0ES1 |        |  |
|                             | Total harmonic distortion for current and voltage   |                              |           |           |                              |        |  |
|                             | Phase sequence detection  |                              | _         | _         | 3WA9111-0ES1                 | /      |  |
|                             | Functional expansions   |                              |           |           | Article No.<br>3WA9111-0ES2  | 11     |  |
|                             | Second protection parameter set   |                              |           |           |                              |        |  |
|                             | Waveform memory Extended metering function  |                              |           |           | 3WA9111-0ES2<br>Article No.  | .7     |  |
|                             | Upgrade to metering function PMF-II Basic Power Monitori  | na                           |           |           | 3WA9111-0ES5                 | 52     |  |
|                             | (metering values, see catalog page 1/25)  |                              |           |           | 517.5111 0255                | _      |  |
|                             | Upgrade to metering function PMF-III Advanced Power Mo (metering values, see catalog page 1/25)   | nitoring                     |           |           | 3WA9111-0ES5                 | 53     |  |
| Licenses to activate test f | unction in SENTRON Powerconfig software   |                              |           |           |                              |        |  |
|                             | Version   |                              |           |           | Article No.                  |        |  |
|                             | Standard test license for testing the protective functions of The license is time-limited to 365 days.  | SENTRON circuit breakers.    |           |           | 7KN2720-0CE0                 | 0-1YC1 |  |
|                             | Advanced test license for testing the protective functions a the SENTRON circuit breakers. The license is time-limited to   |                              | function  | s (EPF) o | 7KN2720-0CE0                 | 0-2YC1 |  |

<sup>1)</sup> Requires an internal voltage tap and a voltage tap module

Article No.

#### Accessories for electronic trip unit

#### Upgrading to ready4COM feature through BSS200 breaker status sensor for ETU600



 Gathers information about the statuses of the circuit breaker via signaling switches and transmits it to the CubicleBUS<sup>2</sup>

 Controls the communication-capable CC-COM closing coil and the ST-COM shunt trip in a circuit breaker with the ready4COM feature

 The BSS200 breaker status sensor is fitted in every circuit breaker with ETU600 of the ready4COM application package and with the PMF-I to PMF-III metering function

#### External current sensors for the N conductor



|  | of the N conductor                   |      |               |  |  |  |  |  |
|--|--------------------------------------|------|---------------|--|--|--|--|--|
|  | Version                              | Size | Article No.   |  |  |  |  |  |
|  | For mounting on busbar               | 1    | 3WA9111-0AA21 |  |  |  |  |  |
|  |                                      | 2    | 3WA9111-0AA22 |  |  |  |  |  |
|  |                                      | 3    | 3WA9111-0AA23 |  |  |  |  |  |
|  | For busbar connection DIN connection | 1    | 3WA9111-0AA31 |  |  |  |  |  |
|  |                                      | 2    | 3WA9111-0AA32 |  |  |  |  |  |
|  |                                      | 3    | 3WA9111-0AA33 |  |  |  |  |  |

#### Sealable and lockable covers

• The scope of supply includes both the top cover with safety lock and the sealable bottom cover of the rotary coding switches.



| 7 |
|---|
|   |
|   |
|   |

| Accessory for | Article No.   |
|---------------|---------------|
| ETU300        | 3WA9111-0EM21 |
| ETU600        | 3WA9111-0EM22 |

#### Adapter for connecting the ETU300 to the TD400



Version Article No.

Via the adapter, the ETU300 can be connected to the TD400 to supply it with an external voltage.

There is no parameterization or documentation option via SENTRON Powerconfig

#### Automatic reset of the reclosing lockout



VersionArticle No.Spare part for option K01 or for retrofitting3WA9111-0EM31

#### Remote trip alarm reset coils 1)





For mechanical tripped indicator

• Including automatic reset of the reclosing lockout 3WA9111-0EM31

| Voltage                   | Article No.   |
|---------------------------|---------------|
| 24 30 V DC                | 3WA9111-0EM42 |
| 48 60 V DC                | 3WA9111-0EM44 |
| 110 127 V AC/110 125 V DC | 3WA9111-0EM45 |
| 208 240 V AC/220 250 V DC | 3WA9111-0EM46 |

#### Second tripping solenoid (F6) with reclosing lockout



Version Article No.

For external control via the external trip controller ETC600, including the necessary parts for the secondary disconnect terminal 3WA9111-0EM61

#### External trip controller ETC600



| Version   | Article No.   |
|---|---------------|
| Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail | 3WA9111-0EM62 |

<sup>1)</sup> Article numbers also apply to 3WL see page 1/111

## Accessories and spare parts

#### Locking provisions and interlocks

#### Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

| Version             | Article No.   |
|---------------------|---------------|
| Without safety lock | 3WA9111-0BA21 |
| Made by CES         | 3WA9111-0BA22 |
| Made by IKON        | 3WA9111-0BA23 |

#### Locking provision against unauthorized closing from the operator panel



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

| Туре                                | Scope of supply                          | Article No.   |
|-------------------------------------|--|---------------|
| Made by CES                         | Locks, cylinders and keys included (S01) | 3WA9111-0BA35 |
| Made by IKON                        | Locks, cylinders and keys included (S03) | 3WA9111-0BA36 |
| Assembly kit FORTRESS or CASTELL 1) | Without locks, cylinders or keys (S05)   | 3WA9111-0BA31 |
| Made by KIRK-Key 1)                 | Without locks, cylinders or keys (S06)   | 3WA9111-0BA33 |
| Assembly kit for padlocks           | Without padlock (S07)                    | 3WA9111-0BA37 |
| Made by RONIS                       | Locks, cylinders and keys included (S08) | 3WA9111-0BA32 |
| Made by PROFALUX                    | Locks, cylinders and keys included (S09) | 3WA9111-0BA34 |
|                                     |  |               |

#### Locking provision against unauthorized closing of the withdrawable circuit breaker



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

| Туре                | Scope of supply                    | Article No.   |
|---------------------|------------------------------------|---------------|
| Made by CES         | Locks, cylinders and keys included | 3WA9111-0BA51 |
| Made by IKON        | Locks, cylinders and keys included | 3WA9111-0BA53 |
| Made by KIRK-Key 1) | Without locks, cylinders or keys   | 3WA9111-0BA57 |
| Made by RONIS       | Locks, cylinders and keys included | 3WA9111-0BA58 |
| Made by PROFALUX    | Locks, cylinders and keys included | 3WA9111-0BA50 |

#### Locking provisions for charging handle with padlock



| · 5···5 · · · · · · · · · · · · · · · · |                 |               |
|---|-----------------|---------------|
| Version                                 | Scope of supply | Article No.   |
| Spare part for S33                      | Without padlock | 3WA9111-0BA71 |

#### Locking provision to prevent movement of the withdrawable circuit breaker

- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76



| Туре                | Scope of supply                    | Article No.   |
|---------------------|------------------------------------|---------------|
| Made by CES         | Locks, cylinders and keys included | 3WA9111-0BA73 |
| Made by IKON        | Locks, cylinders and keys included | 3WA9111-0BA75 |
| Made by PROFALUX    | Locks, cylinders and keys included | 3WA9111-0BA76 |
| Made by RONIS       | Locks, cylinders and keys included | 3WA9111-0BA77 |
| Made by KIRK-Key 1) | Without locks, cylinders or keys   | 3WA9111-0BA80 |

Docks, cylinders and keys must be ordered from the manufacturer. Suitable cylinder lock KIRK Key C 900-301. Suitable lock FORTRESS CLIS X005. Suitable lock CASTELL FS2.

System overview, page 1/28

#### Locking provisions and interlocks

#### Interlocking systems



- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

| Туре        | Article No.   |
|-------------|---------------|
| Made by CES | 3WA9111-0BA43 |

#### $Locking\ mechanisms\ to\ prevent\ movement\ of\ the\ with drawable\ circuit\ breakers\ in\ the\ disconnected\ position$

- Consisting of Bowden cable and the breaker mechanism in the control cabinet door
- Spare part for option R81, R85, R86
- Note: Not possible in combination with "Locking mechanism to prevent opening of the control cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the control cabinet door open" (order code "R50")



| Туре             | Article No.   |
|------------------|---------------|
| Made by CES      | 3WA9111-0BA81 |
| Made by IKON     | 3WA9111-0BA82 |
| Made by PROFALUX | 3WA9111-0BA83 |
| Made by RONIS    | 3WA9111-0RA84 |

#### Locking mechanisms to prevent opening of the control cabinet door when the circuit breaker is closed



- Defeatable
- Note: Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

|                           | · · · · · · · · · · · · · · · · · · · |               |
|---------------------------|---------------------------------------|---------------|
| Version                   |                                       | Article No.   |
| Spare part for option S30 | Fixed-mounted circuit breaker         | 3WA9111-0BB12 |
| Spare part for option R30 | Guide frames                          | 3WA9111-0BB13 |

#### Locking mechanisms to prevent movement when the control cabinet door is open



- Mounted on guide frame
- Note: Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

| Version                   | Article No.   |
|---------------------------|---------------|
| Spare part for option R50 | 3WA9111-0BB15 |

#### Mechanical interlocks



• With Bowden cable 2000 mm (one required for each circuit breaker)

| Туре  | Circuit breaker and guide frame when ordered separately | Spare part for           | Article No.   |
|---|---|--------------------------|---------------|
| Fixed-mounted circuit breaker                             | -   | Option S55               | 3WA9111-0BB21 |
| Module for withdrawable circuit breakers with guide frame | -   | Option R55 <sup>1)</sup> | 3WA9111-0BB22 |
| Module for guide frame                                    | ✓   | Option R56               | 3WA9111-0BB23 |
| Module for withdrawable circuit breaker                   | ✓   | Option R57               | 3WA9111-0BB24 |
| Adapter for size 3 withdrawable circuit breaker           | ✓   | -                        | 3WA9111-0BB25 |

#### Coupling on the circuit breaker for mutual interlocking with Bowden cable



• Can be used in all circuit breakers

Article No. 3WA9111-0BB31

#### Bowden cable for mutual mechanical interlocking

|   | 9 |
|---|---|
| 0 |   |
|   |   |
|   |   |

| Length  | Article No.   |
|---------|---------------|
| 2000 mm | 3WA9111-0BB41 |
| 3000 mm | 3WA9111-0BB42 |
| 4500 mm | 3WA9111-0BB43 |

<sup>1)</sup> Not available in combination with R40

## Accessories and spare parts

#### Indicators and control elements

#### Ready-to-close signaling switches (S20)



 Version
 Article No.

 Spare part for signaling switch installed as standard
 3WA9111-0AH01

#### 1st trip alarm switch (S24)



 Version
 Article No.

 Spare part for signaling switch installed as standard
 3WA9111-0AH02

#### 2nd trip alarm switch (S25)



· Can only be used with a circuit breaker with an electronic trip unit without ready4COM

 The 1st trip alarm switch (1 changeover contact) is installed in every circuit breaker with a trip unit as standard

| version                   | Contacts | Article No.   |
|---------------------------|----------|---------------|
| Spare part for option K06 | 1 NO     | 3WA9111-0AH03 |

#### Mechanical operating cycles counter (5-digit)



 Version
 For circuit breakers/non-automatic circuit breakers
 Article No.

 Spare part for option C01
 With manual operating mechanism
 3WA9111-0AH04

 With spring charging motor
 3WA9111-0AH05

#### Spring charge signaling switch (S21)



• Standard when a spring charging motor is installed to charge the stored energy mechanism

When a spring charging motor is retrofitted, the spring charge signaling switch can also be retrofitted

1 NO 3WA9111-0AH06

#### Position signaling switch for withdrawable circuit breakers



• All conventional contacts are implemented as changeover contacts. PSS321  $3 \times$  connected position,  $2 \times$  test position,  $1 \times$  disconnected position 3WA9111-0AH11 PSS111-COM 3WA9111-0AH12 1 × connected position, 1 × test position, 1 × disconnected position and option for connection to a communications module COM (Signal: "disconnected position" and "absent") PSS400-COM new 4 × connected position and option for connection to a communi-3WA9111-0AH13 cations module COM (Signal: "disconnected position" and "absent") 3WA9111-0AH14 PSS600 new 6 × connected position PSS111  $1 \times$  connected position,  $1 \times$  test position,  $1 \times$  disconnected position 3WA9111-0AH15

#### Local electric close (S10) for operator panel



- Scope of supply: Button + wiring
- · Not possible with motor disconnect switch
- Note: Possible only for circuit breakers with closing coil

VersionArticle No.With sealing cap, spare part for option C113WA9111-0AH21With CES assembly kit, spare part for option C123WA9111-0AH22With IKON assembly kit3WA9111-0AH23

#### Motor disconnect switch (S12)



- Mounting onto operator panel
- Only in combination with the spring charging motor for charging the stored energy mechanism
- Not available in combination with local electric close

VersionArticle No.Spare part for option C243WA9111-0AH24

#### Emergency OPEN button



Mushroom pushbutton instead of local mechanical open

Version

 Version
 Article No.

 Spare part for option C25
 3WA9111-0AH25

#### Secondary disconnect terminals for circuit breakers and guide frames

- For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible
- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
  - Non-automatic circuit breakers with 3 blocks
  - Non-automatic circuit breakers with ready4COM feature with 4 blocks
  - Circuit breakers with ETU600 LSI or LSIG with 4 blocks
  - Circuit breakers with ETU600 LSIG-HiZ with 5 blocks

| Secondary disconnect terminal           |                                |  |               |
|---|--------------------------------|--|---------------|
|   | Version                        | Туре   | Article No.   |
|   | Base part 1)                   |  | 3WA9111-0AB01 |
|   | 1000 V extension <sup>1)</sup> |  | 3WA9111-0AB02 |
| Million                                 | Manual connector 2             | Screw connection   | 3WA9111-0AB03 |
| *************************************** |                                | Push-in connection   | 3WA9111-0AB04 |
|   |                                | Ring lug connection  | 3WA9111-0AB05 |
|   | Coding kits ③                  | For secondary disconnect terminal blocks X5 to X9 for fixed-mounted circuit breakers | 3WA9111-0AB07 |
| minimini.                               | Sliding contact module 4       | For guide frames   | 3WA9111-0AB08 |
| THE                                     | Blanking block                 |  | 3WA9111-0AB12 |

For a complete secondary disconnect terminal block, you must order:

Fixed-mounted version: 1 + 2 + 3Withdrawable version: 1 + 4 + 2

Withdrawable version: 1+4+2Secondary disconnect terminal for circuit breakers with breaking capacity C and E must be ordered separately

#### **Auxiliary releases**

| Closing coil (CC)/shunt trip (ST) 1)      |   |                           |               |
|---|---|---------------------------|---------------|
|   | Suitable for uninterrupted duty                           |                           |               |
| the land                                  | Version   | Voltage                   | Article No.   |
|   | 100% OP   | 24 30 V DC                | 3WA9111-0AD02 |
|   | Switching time ≤ 80 ms                                    | 48 60 V DC                | 3WA9111-0AD04 |
|   |   | 110 125 V DC/110 127 V AC | 3WA9111-0AD05 |
|   |   | 220 250 V DC/208 240 V AC | 3WA9111-0AD06 |
| Closing coil (CC-COM)/shunt trip (ST-COM) |   |                           |               |
|   | Suitable for uninterrupted duty                           |                           |               |
| The last                                  | Version   | Voltage                   | Article No.   |
|   | non-automatic circuit breakers                            | 24 30 V DC                | 3WA9111-0AD32 |
|   |   | 48 60 V DC                | 3WA9111-0AD34 |
|   |   | 110 125 V DC/110 127 V AC | 3WA9111-0AD35 |
|   | Switching time ≤ 80 ms<br>Switching time via COM ≤ 120 ms | 220 250 V DC/208 240 V AC | 3WA9111-0AD36 |

<sup>1)</sup> Article numbers also apply to 3WL see page 1/116

## Accessories and spare parts

#### **Auxiliary release**

# Closing coils (CC) 1) Shunt trips (ST) 1)

• For momentary duty, with cut-off switch S15 (NC)

| Version              | Voltage                   | Article No.   |
|----------------------|---------------------------|---------------|
| 5% OP                | 24 30 V DC                | 3WA9111-0AD12 |
| Switching time 50 ms | 48 60 V DC                | 3WA9111-0AD14 |
|                      | 110 125 V DC/110 127 V AC | 3WA9111-0AD15 |
|                      | 220 250 V DC/208 240 V AC | 3WA9111-0AD16 |



• For momentary duty, with cut-off switch S14 (NO)

|  | Version              | Voltage                   | Article No.   |
|--|----------------------|---------------------------|---------------|
|  | 5% OP                | 24 30 V DC                | 3WA9111-0AD22 |
|  | Switching time 50 ms | 48 60 V DC                | 3WA9111-0AD24 |
|  |                      | 110 125 V DC/110 127 V AC | 3WA9111-0AD25 |
|  |                      | 220 250 V DC/208 240 V AC | 3WA9111-0AD26 |

#### Capacitor trip device



- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA, 3WL and 3WN circuit breakers
- Note: Rated control supply voltage must match the rated control supply voltage of the shunt trips.

| Rated control supply voltage/rated operational voltage |           | Article No.   |
|--|-----------|---------------|
| 50/60 Hz AC  | DC        |               |
| 208 240 V  | 220 250 V | 3WA9111-0AD81 |

#### Undervoltage release (UVR) 1



| J۱ | VR) <sup>1)</sup>   |                           |               |  |  |  |
|----|---|---------------------------|---------------|--|--|--|
|    | Version   | Voltage                   | Article No.   |  |  |  |
|    | Instantaneous $\leq$ 0.08 s (UVR) and short-time delayed $\leq$ 0.2 s | 24 30 V DC                | 3WA9111-0AE02 |  |  |  |
|    |   | 48 60 V DC                | 3WA9111-0AE04 |  |  |  |
|    |   | 110 125 V DC/110 127 V AC | 3WA9111-0AE05 |  |  |  |
|    |   | 220 250 V DC/208 240 V AC | 3WA9111-0AE06 |  |  |  |
|    |   | 380 415 V AC              | 3WA9111-0AE07 |  |  |  |
|    | Delayed (UVR-t) <sup>2)</sup> adjustable delay 0.2 3.2 s              | 48 V DC                   | 3WA9111-0AE13 |  |  |  |
|    |   | 60 V DC                   | 3WA9111-0AE14 |  |  |  |
|    |   | 110 125 V DC/110 127 V AC | 3WA9111-0AE15 |  |  |  |
|    |   | 220 250 V DC/208 240 V AC | 3WA9111-0AE16 |  |  |  |
|    |   | 380 415 V AC              | 3WA9111-0AE17 |  |  |  |

<sup>1)</sup> Article numbers also apply to 3WL see page 1/116

#### Operating mechanism 1)

# Spring charging motor to charge the stored energy mechanism Voltage 24 ... 30 V DC

| voltage                   | Article No.   |
|---------------------------|---------------|
| 24 30 V DC                | 3WA9111-0AF02 |
| 48 60 V DC                | 3WA9111-0AF04 |
| 110 125 V DC/110 127 V AC | 3WA9111-0AF05 |
| 220 250 V DC/208 240 V AC | 3WA9111-0AF06 |

<sup>1)</sup> Article numbers also apply to 3WL see page 1/116

#### **Auxiliary contacts**



| () |             |               |
|----|-------------|---------------|
|    | Contacts    | Article No.   |
|    | 2 NO + 2 NC | 3WA9111-0AG01 |
|    | 2 NO        | 3WA9111-0AG02 |
|    | 1 NO + 1 NC | 3WA9111-0AG03 |
|    |             |               |

<sup>2)</sup> The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

### Door sealing frame, protective cover

| Door sealing frame     |   |               |
|------------------------|---|---------------|
|                        | Version   | Article No.   |
|                        | Spare part for option T40   | 3WA9111-0AP01 |
| Protective covers IP55 |   |               |
|                        | Cannot be used in conjunction with door sealing frames     Hood removable and can be opened on both sides |               |
| 1 1                    |   | Article No.   |
|                        |   | 3WA9111-0AP03 |
|                        |   |               |

### Arc chute, arc chute cover

| rc chute      |   |      |              |                                   |               |
|---------------|---|------|--------------|-----------------------------------|---------------|
| 000           | Voltage   | Size | Breaking cap | pacity                            | Article No.   |
| 400           | 690 V AC  | 1    | N, S         |                                   | 3WA9111-0AS01 |
|               |   |      | М            |                                   | 3WA9111-0AS02 |
|               |   | 2    | S, M, H      |                                   | 3WA9111-0AS10 |
|               |   |      | С            |                                   | 3WA9111-0AS11 |
|               |   | 3    | Н            |                                   | 3WA9111-0AS17 |
|               |   |      | С            |                                   | 3WA9111-0AS18 |
|               | 1000 V AC   | 1    | E            | For fixed-mounted breakers        | 3WA9111-0AS04 |
|               |   |      |              | For withdrawable circuit breakers | 3WA9111-0AS05 |
|               |   | 2    | E            |                                   | 3WA9111-0AS12 |
|               |   | 3    | E            |                                   | 3WA9111-0AS18 |
|               | 600 V DC  | 2    | D            |                                   | 3WA9111-0AS13 |
|               | 1000 V DC   | 2    | E            |                                   | 3WA9111-0AS14 |
| c chute cover |   |      |              |                                   |               |
|               | <ul> <li>Parts kit for guide frame</li> <li>Spare part for option R10</li> <li>Not available for: <ul> <li>Breaking capacity C, D and E</li> <li>4000 A size 2</li> </ul> </li> </ul> |      |              |                                   |               |
|               | Number of poles   | Size |              |                                   | Article No.   |
|               | 3-pole  | 1    |              |                                   | 3WA9111-0AS31 |
|               |   | 2    |              |                                   | 3WA9111-0AS32 |
|               |   | 3    |              |                                   | 3WA9111-0AS33 |
|               | 4-pole  | 1    |              |                                   | 3WA9111-0AS41 |
|               |   | 2    |              |                                   | 3WA9111-0AS42 |
|               |   | 3    |              |                                   | 3WA9111-0AS43 |
|               |   |      |              |                                   |               |

### Coding for withdrawable version

# Coding for withdrawable version Variant coding by the customer with 36 coding options Size Article No. 1, 2 3WA9111-0AR11 3 3WA9111-0AR12

## Accessories and spare parts

### **Grounding connection**



- Grounding connection between the guide frame and the circuit breaker • Up to 30 kA or 60 kA ground-fault current

| <ul> <li>2 modules must be used for up</li> </ul> | to 60 kA ground-fault current |                      |               |
|---|-------------------------------|----------------------|---------------|
| Contact module                                    | Size                          | Number of poles      | Article No.   |
| For guide frames                                  | 1, 2 1)                       |                      | 3WA9111-0BG01 |
|   | 3                             |                      | 3WA9111-0BG02 |
| For withdrawable circuit breakers                 | 1                             | 3-pole               | 3WA9111-0BG11 |
|   |                               | 4-pole               | 3WA9111-0BG21 |
|   | 2                             | 3-pole 1)            | 3WA9111-0BG12 |
|   |                               | 4-pole 1)            | 3WA9111-0BG22 |
|   | 3                             | 3-pole <sup>2)</sup> | 3WA9111-0BG13 |
|   |                               | 4-pole <sup>2)</sup> | 3WA9111-0BG23 |

<sup>1)</sup> Cannot be used for size 2 with breaking capacity C and size 2, 4000 A.

### Support bracket

### Support bracket



- · For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No. 3WA9111-0BB50

### Modules of the CubicleBUS<sup>2</sup>

### COM190 PROFINET IO/Modbus TCP communications module 1)



Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and CubicleBUS<sup>2</sup> terminating resistor

Article No. 3WA9111-0EC13

### COM150 communications module Modbus RTU



Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker,

Article No. 3WA9111-0EC15

### OM230 digital input/output module (2 inputs and 3 outputs)



adapter for mounting on DIN rail, connecting cables and CubicleBUS2 terminating resistor

Article No.



Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for CubicleBUS<sup>2</sup> • Type of output contact: NO

3WA9111-0EC11

### Maximum uninterrupted current of an output at 110 ... 230 V AC: 0.2 A

## IOM350 digital input/output module (3 inputs and 5 outputs)

For mounting on DIN rail, including connecting cables and terminating resistor for CubicleBUS<sup>2</sup>

 Type of output contact: CO • Maximum uninterrupted current of an output at 110 ... 230 V AC: 10 A 3WA9111-0EC12



For CubicleBUS<sup>2</sup> on the last module

3WA9111-0EC50



For mounting the modules of the CubicleBUS<sup>2</sup> on the secondary disconnect terminal system of

3WA9111-0EC60 3WA9111-0EC61

Article No.

### ZSI200 Zone-selective interlocking module



Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for CubicleBUS<sup>2</sup>

Article No. 3WA9111-0EC10

For mounting the modules of the CubicleBUS<sup>2</sup> on DIN rail

<sup>2)</sup> Not for breaking capacity E

<sup>1)</sup> For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

### Internal voltage tap

| Set of components for c    | Set of components for conversion of an existing internal voltage tap on the main conducting paths |  |                       |               |  |  |  |
|----------------------------|---|--|-----------------------|---------------|--|--|--|
|                            | Conversion  | Circuit breaker  | Size                  | Article No.   |  |  |  |
| ===                        | From bottom to top  | 3-pole   | 1                     | 3WA9111-0EK11 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK12 |  |  |  |
|                            |   |  | 3                     | 3WA9111-0EK13 |  |  |  |
|                            |   | 4-pole   | 1                     | 3WA9111-0EK21 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK22 |  |  |  |
|                            | <u></u>   |  | 3                     | 3WA9111-0EK23 |  |  |  |
|                            | From top to bottom  | 3-pole   | 1                     | 3WA9111-0EK31 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK32 |  |  |  |
|                            |   |  | 3                     | 3WA9111-0EK33 |  |  |  |
|                            |   | 4-pole   | 1                     | 3WA9111-0EK41 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK42 |  |  |  |
|                            |   |  | 3                     | 3WA9111-0EK43 |  |  |  |
| Retrofit of the internal v | oltage tap on the lower main conduc   | cting paths  |                       |               |  |  |  |
|                            | For breaking capacity   | Set for circuit breaker  | Size                  | Article No.   |  |  |  |
|                            | N, S, M, H, C   | 3-pole   | 1                     | 3WA9111-0EK51 |  |  |  |
| 8 9 9                      | with VTM680 voltage tap module,   |  | 2                     | 3WA9111-0EK52 |  |  |  |
|                            | with power supply of ETU600   |  | 3                     | 3WA9111-0EK53 |  |  |  |
| مام مام مام                |   | 4-pole   | 1                     | 3WA9111-0EK61 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK62 |  |  |  |
|                            |   |  | 3                     | 3WA9111-0EK63 |  |  |  |
|                            | E<br>with VTM640 voltage tap module   | 3-pole   | 1                     | 3WA9111-0EK55 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK56 |  |  |  |
|                            |   |  | 3                     | 3WA9111-0EK57 |  |  |  |
|                            |   | 4-pole   | 1                     | 3WA9111-0EK65 |  |  |  |
|                            |   |  | 2                     | 3WA9111-0EK66 |  |  |  |
|                            |   |  | 3                     | 3WA9111-0EK67 |  |  |  |
| Retrofit kit to connect a  | n external voltage transformer  |  |                       |               |  |  |  |
|                            | Size  |  |                       | Article No.   |  |  |  |
|                            | 2, 3 including VTM640 voltage tap modu  | 2, 3<br>ncluding VTM640 voltage tap module and the necessary connection components |                       |               |  |  |  |
| Voltage tap module         |   |  |                       |               |  |  |  |
| STERSENS                   | Version   |  | For breaking capacity | Article No.   |  |  |  |
| 100                        | VTM680, with power supply of ETU6   | 500 <sup>1)</sup>  | N, S, M, H, C         | 3WA9111-0EM12 |  |  |  |
| 1                          | VTM640  |  | E                     | 3WA9111-0EM11 |  |  |  |

<sup>&</sup>lt;sup>1)</sup> When replacing the VTM680 voltage tap module in an 3WA air circuit breaker with an ID number lower than ID No. OE/230101500000, the internal cable harness of the voltage tap must also be replaced. In this case, the accessory "Retrofit of the internal voltage tap on the lower main conducting paths" is required.

### Main conductor connections, fixed-mounted versions

|              | Size                       | Breaking capacity   Rated current I <sub>n</sub>         | Article No.   |
|--------------|----------------------------|--|---------------|
|              | 1                          | N, S   ≤ 1000 A AC                                       | 3WA9111-0AL11 |
|              |                            | N, S   1250 2000 A AC; M, E   ≤ 2000 A AC                | 3WA9111-0AL12 |
|              | 2                          | S, M, H, E   2000 A AC; D, E   ≤ 2000 A DC               | 3WA9111-0AL21 |
|              |                            | S, M, H, E   2500 A AC                                   | 3WA9111-0AL22 |
|              |                            | S, M, H, E   3200 A AC; D, E   4000 A DC                 | 3WA9111-0AL23 |
|              | 3                          | 4000 A AC (up to a max. short-circuit current of 100 kA) | 3WA9111-0AL31 |
| t-accessible | main connections according | to DIN 43673, double hole for main connection at bottom  |               |
|              | Size                       | Breaking capacity   Rated current I <sub>n</sub>         | Article No.   |
|              | 1                          | N, S   ≤ 1000 A AC                                       | 3WA9111-0AL13 |
| ď            |                            | N, S   1250 2000 A AC; M, E   ≤ 2000 A AC                | 3WA9111-0AL14 |
|              | 2                          | S, M, H, E   2000 A AC; D, E   ≤ 2000 A DC               | 3WA9111-0AL24 |
| 12           |                            | S, M, H, E   2500 A AC                                   | 3WA9111-0AL25 |
|              |                            | S, M, H, E   3200 A AC; D, E   4000 A DC                 | 3WA9111-0AL26 |
|              | 3                          | 4000 A AC (up to a max. short-circuit current of 100 kA) | 3WA9111-0AL32 |

## Accessories and spare parts

### Main conductor connections, fixed-mounted versions

| Rear vertical main                     | connections |  |               |
|--|-------------|--|---------------|
| Alex                                   | Size        | Breaking capacity   Rated current I <sub>n</sub>                   | Article No.   |
| 3 14                                   | 1           | N, S, M, E   ≤ 2000 A AC 1)  | 3WA9111-0AM11 |
|  |             | N, S, M, E   2500 A AC   | 3WA9111-0AM12 |
| 8                                      | 2           | S, M, H, C, E   ≤ 3200 A AC <sup>2)</sup>                          | 3WA9111-0AM21 |
|  | 3           | H, C, E   ≤ 6300 A AC  | 3WA9111-0AM33 |
| Rear horizontal connection sets 3) new |             |  |               |
|  | Size        | Breaking capacity   Rated current I <sub>n</sub>   Number of poles | Article No.   |
|  | 2           | S, M, H, E   4000 A, 3-pole  | 3WA9111-0AX28 |
|  |             | S, M, H, E   4000 A, 4-pole  | 3WA9111-0AX30 |
|  |             | S, M, H, E   4000 A, 4-pole (Spare part for Z option D04)          | 3WA9111-0AX32 |

1) In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WA9111-0AM11 vertical connection is required for each connection,

from 1250 A to 2000 A or with breaking capacity M or E two 3WA9111-0AM11 vertical connections are required for each connection.

In the case of vertical connection size 2, up to 2500 A one 3WA9111-0AM21 vertical connection is required for each connection for breaking capacity S, M, H, E, D, for 3200 A and always for breaking capacity C, two 3WA9111-0AM21 vertical connections are required for each connection

A set contains top and bottom terminals and is approved only as a spare part for circuit breakers with the following article numbers:

3WL1240-3xxx2-xxxx, 3WL1240-4xxx2-xxxx, 3WL1240-5xxx2-xxxx 3WL1240-8xxx2-xxxx

### Main conductor connections for withdrawable units

| Front-accessible main  | connections according to DIN 4  | 13673, double hole at top or at bottom 1)                     |               |
|------------------------|---------------------------------|---|---------------|
|                        | Size                            | Breaking capacity   Rated current In                          | Article No.   |
|                        | 1                               | N, S   ≤ 1000 A AC  | 3WA9111-0AN11 |
|                        |                                 | N, S   1250 2000 A AC; M, E   ≤ 2000 A AC                     | 3WA9111-0AN12 |
| 0                      | 2                               | N, S   1250 2000 A AC; M, E   ≤ 2000 A AC                     | 3WA9111-0AN21 |
|                        |                                 | S, M, H, E   2500 A AC  | 3WA9111-0AN22 |
|                        |                                 | S, M, H, E   3200 A AC; D, E   4000 A DC                      | 3WA9111-0AN23 |
|                        | 3                               | H   4000 A AC   | 3WA9111-0AN31 |
| Supports for front-acc | cessible main connections accor | ding to DIN 43673   |               |
|                        | Number of poles                 | Size  | Article No.   |
|                        | 3-pole, set for 3 bars,         | 1   | 3WA9111-0AN81 |
|                        | top or bottom                   | 2   | 3WA9111-0AN82 |
|                        |                                 | 3   | 3WA9111-0AN83 |
|                        | 4-pole, set for 4 bars,         | 1   | 3WA9111-0AN84 |
|                        | top or bottom                   | 2   | 3WA9111-0AN85 |
|                        |                                 | 3   | 3WA9111-0AN86 |
| Rear vertical main cor | nnections                       |   |               |
| -0                     | Size                            | Breaking capacity   Rated current I <sub>n</sub>              | Article No.   |
|                        | 1                               | N, S   ≤ 1000 A AC  | 3WA9111-0AV11 |
| 20                     |                                 | N, S   1250 2000 A AC   | 3WA9111-0AV12 |
| 4                      | 2                               | S, M, H, E   2000 A AC; D, E   $\leq$ 2000 A DC <sup>2)</sup> | 3WA9111-0AV21 |
|                        |                                 | S, M, H, E   2500 A AC <sup>2)</sup>                          | 3WA9111-0AV22 |
| <i>y</i>               |                                 | S, M, H, E   3200 A AC; D, E   4000 A DC <sup>2)</sup>        | 3WA9111-0AV23 |
|                        | 3                               | H, C, E   ≤ 5000 A AC   | 3WA9111-0AV31 |
| Rear horizontal main   | connections                     |   |               |
| -3                     | Size                            | Breaking capacity   Rated current I <sub>n</sub>              | Article No.   |
|                        | 1                               | N, S   ≤ 1000 A AC  | 3WA9111-0AX11 |
|                        |                                 | N, S   1250 2000 A AC   | 3WA9111-0AX12 |
|                        | 2                               | S, M, H, E   2000 A AC; D, E   $\leq$ 2000 A DC <sup>2)</sup> | 3WA9111-0AX21 |
| 40                     |                                 | S, M, H, E   2500 A AC <sup>2)</sup>                          | 3WA9111-0AX22 |
|                        |                                 | S, M, H, E   3200 A AC; D, E   4000 A DC <sup>2)</sup>        | 3WA9111-0AX23 |
|                        | 3                               | H, C, E ≤ 5000 A AC   | 3WA9111-0AX31 |
| Connecting flange      |                                 |   |               |
| -0                     | Size                            | Breaking capacity   Rated current I <sub>n</sub>              | Article No.   |
|                        | 1                               | N, S   ≤ 1000 A AC  | 3WA9111-0AW11 |
|                        |                                 | N, S   1250 2000 A AC; M, E   ≤ 2000 A AC                     | 3WA9111-0AW12 |
|                        | 2                               | S, M, H, E   2000 A AC; D, E   ≤ 2000 A DC                    | 3WA9111-0AW21 |
|                        |                                 | S, M, H, E   2500 A AC  | 3WA9111-0AW22 |
|                        |                                 | S, M, H, E   3200 A AC; D, E   4000 A DC                      | 3WA9111-0AW23 |
|                        |                                 | C 2000 3200 A new   | 3WA9111-0AW24 |
|                        | 3                               | H   4000 A AC   | 3WA9111-0AW31 |
|                        |                                 | C, E   AC 4000 A new  | 3WA9111-0AW32 |

<sup>1)</sup> When using front-accessible main connections (withdrawable circuit breakers) supports are required

<sup>&</sup>lt;sup>2)</sup> Not for circuit breakers with very high breaking capacity C

### **Conversion kit**

### Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers



- Guide frames and sliding contact modules must be ordered separately
   Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WA circuit

| DIEGREI | 3 VVI | itii bieakiiig | capacity | Canu | breaking | capacity | _ |
|---------|-------|----------------|----------|------|----------|----------|---|
|         |       |                |          |      |          |          |   |

| Number of poles | Size | Article No.   |
|-----------------|------|---------------|
| 3-pole          | 1    | 3WA9111-0BC11 |
|                 | 2    | 3WA9111-0BC12 |
|                 | 3    | 3WA9111-0BC13 |
| 4-pole          | 1    | 3WA9111-0BC14 |
|                 | 2    | 3WA9111-0BC15 |
|                 | 3    | 3WA9111-0BC16 |

### Main contact elements

### Main contact elements for AC circuit breakers



- Notes:
  - To be ordered only once for each circuit breaker
  - On the following circuit breakers, the main contact elements can only be replaced in the factory: 3WA1 size 1 breaking capacity M and E

3WA1 size 2 breaking capacity C 3WA1 size 3 breaking capacity C and E

| Number of poles | Size | Breaking capacity | Rated current I <sub>n</sub> | Article No.   |
|-----------------|------|-------------------|------------------------------|---------------|
| 3               | 1    | N                 | ≤ 1000 A                     | 3WA9111-0AQ01 |
|                 |      |                   | 1250 A                       | 3WA9111-0AQ02 |
|                 |      |                   | 1600 A                       | 3WA9111-0AQ04 |
|                 |      | S                 | ≤ 1000 A                     | 3WA9111-0AQ03 |
|                 |      |                   | 1250 1600 A                  | 3WA9111-0AQ04 |
|                 | 2    | S, M, H, E        | 2000 A                       | 3WA9111-0AQ08 |
|                 |      |                   | 2500 A                       | 3WA9111-0AQ11 |
|                 |      |                   | 3200 A                       | 3WA9111-0AQ13 |
|                 |      |                   | 4000 A                       | 3WA9111-0AQ15 |
|                 | 3    | Н                 | 4000 A                       | 3WA9111-0AQ20 |
|                 |      |                   | 5000 6300 A                  | 3WA9111-0AQ22 |
| 4               | 1 N  | N                 | ≤ 1000 A                     | 3WA9111-0AQ51 |
|                 |      |                   | 1250 A                       | 3WA9111-0AQ52 |
|                 |      |                   | 1600 A                       | 3WA9111-0AQ54 |
|                 |      | S                 | ≤ 1000 A                     | 3WA9111-0AQ53 |
|                 |      |                   | 1250 1600 A                  | 3WA9111-0AQ54 |
|                 | 2    | S                 | 2000 A                       | 3WA9111-0AQ58 |
|                 |      |                   | 2500 A                       | 3WA9111-0AQ61 |
|                 |      |                   | 3200 A                       | 3WA9111-0AQ63 |
|                 |      |                   | 4000 A                       | 3WA9111-0AQ65 |
|                 | 3    | Н                 | 4000 A                       | 3WA9111-0AQ70 |
|                 |      |                   | 5000 6300 A                  | 3WA9111-0AQ72 |

### Main contact elements for DC non-automatic circuit breakers



| • Note: To be   | ordered only o | nce for each circuit breaker |                              |               |
|-----------------|----------------|------------------------------|------------------------------|---------------|
| Number of poles | Size           | Breaking capacity            | Rated current I <sub>n</sub> | Article No.   |
| 3               | 2              | D, E                         | 1000/2000 A                  | 3WA9111-0AQ17 |
|                 |                |                              | 4000 A                       | 3WA9111-0AQ18 |
| 4               | 2 D, E         | D, E                         | 1000/2000 A                  | 3WA9111-0AQ67 |
|                 |                |                              | 4000 A                       | 3WA9111-0A068 |

System overview, page 1/28

## Accessories and spare parts

### **Interfaces**

### Interface to the IEC 61850

• The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP)






| to nigher-level systems.    |                     |               |
|-----------------------------|---------------------|---------------|
| Туре                        | Operational voltage | Article No.   |
| SICAM CP-8021 1)            | -                   | 6MF2802-1AA00 |
| SICAM CP-8031 2)            | -                   | 6MF2803-1AA00 |
| SICAM CP-8050 <sup>2)</sup> | -                   | 6MF2805-0AA00 |
| SICAM PS-8620               | 24 60 V DC (12 W)   | 6MF2862-0AA00 |
| SICAM PS-8622               | 110 220 V DC (12 W) | 6MF2862-2AA00 |

- $^{1)}$  Dimensioned for device quantities of max. 1 × 3WA and 1 × 3VA  $^{2)}$  Dimensioned for device quantities of max. 1 × 3WA and 8 × 3VA
- 3) Dimensioned for device quantities of max. 3 × 3WA and 8 × 3VA or 2 × 3WA and 8 × 3VA and 1 × PAC4200

### You will find further information at:

### www.siemens.com/sicam-a8000

For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum. The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057)

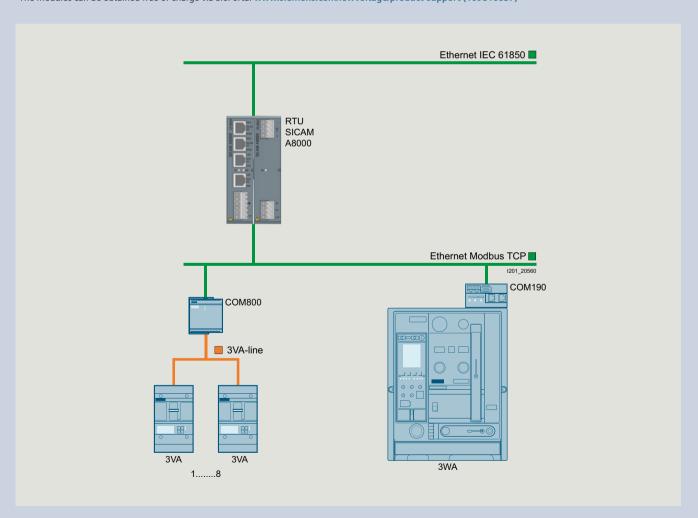

1

System overview, page 1/28 Siemens LV 10 · 2025 1/75

## 3WL1 circuit breakers and non-automatic circuit breakers for AC and DC

AC


IEC 60947-2

|   |                                       |      |           | 1:     |               |       |                                    |             |                      |    |
|---|---------------------------------------|------|-----------|--------|---------------|-------|------------------------------------|-------------|----------------------|----|
|   |                                       |      |           | 3WI    | _10           |       |                                    | 3WL1        | 1                    |    |
| Basic data  |                                       |      |           |        |               |       |                                    |             |                      |    |
| Rated operational voltage $U_{\rm e}$   |                                       | V    | ≤ 690     |        |               |       | ≤ 1000                             |             |                      |    |
| Rated current I <sub>n</sub>  |                                       | Α    |           | 630    | 1250          |       |                                    | 630 20      | 00                   |    |
| Size  |                                       |      | 0         |        |               | 1     |                                    |             |                      |    |
| Type of mounting  |                                       |      | Withdrawa | able   | Fixed-mou     | inted | Withdraw                           | able F      | ixed-mounted         | d  |
| Number of poles   |                                       |      | 3/4-pol   | е      | 3/4-pol       | le    | 3/4-pol                            | е           | 3/4-pole             |    |
| Dimensions  |                                       |      |           |        |               |       |                                    |             |                      |    |
| Width (3-pole   4-pole)   |                                       | mm   | 278   34  | 18     | 210 28        | 30    | 320   41                           | 0           | 320   410            |    |
| Height (standard   A05, A15, A16, DC greater than 600 V)                          |                                       | mm   | 363.5     |        | 296           |       | 468   51                           | 8           | 462                  |    |
| Depth   |                                       | mm   | 271       |        | 183           |       | 471                                |             | 357                  |    |
| Approvals   |                                       |      |           |        |               |       |                                    |             |                      |    |
| General product approvals   |                                       |      | VDE, E    | AC, CC | C, CE, C-Tick | (     | VDE, E                             | EAC, CCC,   | CE, C-Tick           |    |
| Marine/shipbuilding   |                                       |      |           | RM     | RS            |       | ABS, DNV                           | , LR, BV, G | L, PRS, RMRS         |    |
| Breaking capacity   |                                       |      | В         | N      |               | S     | N                                  | S           | Н                    |    |
| Rated short-circuit breaking capacity   |                                       |      |           |        |               |       |                                    |             |                      |    |
| Rated operational voltage $U_{\rm e}$ up to 415 V AC $I_{\rm cu} \mid I_{\rm cs}$ |                                       | kA   | 42   42   | 55     | 50 66         | 50    | 55 55                              | 66 66       | 85   85              |    |
| Rated operational voltage $U_{\rm e}$ up to 500 V AC $I_{\rm cu} \mid I_{\rm cs}$ |                                       | kA   | 42   42   | 50     | 50 50         | 50    | 55 55                              | 66 66       | 85   85              |    |
| Rated operational voltage $U_{\rm e}$ up to 690 V AC $I_{\rm cu} \mid I_{\rm cs}$ |                                       | kA   | - -       | 42     | 42 50         | 50    | 42   42                            | 50 50       | 66   66 <sup>6</sup> | 6) |
| Rated operational voltage $U_{\rm e}$ up to 690 V AC +20% $^{6)}$ , with Z o      | ption: A16 $I_{cu} \mid I_{cs}$       | kA   | - -       | -      |               | -     | - -                                | - -         | 50   50              |    |
| Rated operational voltage $U_{\rm e}$ up to 1000 V AC, with Z option:             | A05 I <sub>cu</sub>   I <sub>cs</sub> | kA   | - -       | -1     |               | -     | - -                                | - -         | 50 50                |    |
| Rated operational voltage $U_{\rm e}$ up to 1150 V AC, with Z option:             | A15 I <sub>cu</sub>   I <sub>cs</sub> | kA   | - -       | -      |               | -     | - -                                | - -         | - -                  |    |
| Rated short-time withstand current I <sub>cw</sub> 5)                             |                                       |      |           |        |               |       |                                    |             |                      |    |
| Rated short-time withstand current $I_{cw}$ at $U_{e}$ up to 500 V AC             | 0.5 s                                 | kA   | -         | -      |               | -     | 55                                 | 66          | 85                   |    |
|   | 1 s                                   | kA   | 42        | 42     | 2 5           | 50    | 50                                 | 66          | 85                   |    |
|   | 2 s                                   | kA   | -         | -      |               | -     | 35 <sup>1)</sup> /45 <sup>2)</sup> | 45          | 70                   |    |
|   | 3 s                                   | kA   | 24        | 24     | 1 3           | 36    | 35 <sup>1)</sup> /45 <sup>2)</sup> | 35          | 60                   |    |
| Rated short-time with stand current $I_{cw}$ at $U_{e}$ up to 690 V AC            | 0.5 s                                 | kA   | -         | -      |               | -     | 42                                 | 50          | 66 7)                |    |
|   | 1 s                                   | kA   | 42        | 42     | 2 5           | 50    | 42                                 | 50          | 66 <sup>7)</sup>     |    |
|   | 2 s                                   | kA   | -         | -      |               | _     | 35 <sup>1)</sup> /42 <sup>2)</sup> | 45          | 66 8)                |    |
|   | 3 s                                   | kA   | 24        | 24     | 1 3           | 36    | 30 <sup>1)</sup> /45 <sup>2)</sup> | 35          | 60                   |    |
| Rated short-time withstand current $I_{cw}$ at DC                                 | 1 s                                   | kA   | -         | -      |               | -     | -                                  | -           | -                    |    |
| Rated conditional short-circuit current $I_{cc}$ of the non-auton                 | natic air circuit brea                | kers |           |        |               |       |                                    |             |                      |    |
| Up to 500 V AC  |                                       | kA   | -         | 42     | 2 5           | 50    | 55                                 | 66          | 85                   |    |
| Up to 690 V AC  |                                       | kA   | _         | 42     | 2 5           | 50    | 42                                 | 50          | 66                   |    |
| Up to 1000 V/1150 V AC, with Z option: A05, A16                                   |                                       | kA   | -         | -      |               | _     | -                                  | -           | 50                   |    |
| Up to 1000 V/1150 V AC, with Z option: A15  |                                       | kA   | _         | -      |               |       | -                                  | -           | _                    |    |
| Up to 220 V DC  |                                       | kA   | -         | -      |               | -     | -                                  | -           | -                    |    |
| Up to 300 V DC  |                                       | kA   | -         | -      |               | -     | -                                  | -           | -                    |    |
| Up to 600 V DC  |                                       | kA   | -         | -      |               | -     | -                                  | -           | -                    |    |
| Up to 1000 V DC   |                                       | kA   | -         | -      |               | _     | -                                  | -           | -                    |    |
| Rated short-circuit making capacity I <sub>cm</sub>                               |                                       |      |           |        |               |       |                                    |             |                      |    |
| I <sub>cm</sub> at 415 V AC   |                                       | kA   | 88        | 12     | 1 1           | 45    | 121                                | 145         | 187                  |    |
| I <sub>cm</sub> at 500 V AC   |                                       | kA   | 88        | 10     |               | 05    | 121                                | 145         | 187                  |    |
| I <sub>cm</sub> at 690 V AC   |                                       | kA   | _         | 88     |               | 05    | 88                                 | 105         | 145                  |    |
|   |                                       | kA   |           | 00     | , 1           | 0.5   | -                                  | -           | 105                  |    |
| I <sub>cm</sub> at 1000 V AC  |                                       |      | _         |        |               |       | _                                  | _           | -                    |    |
| I <sub>cm</sub> at 1150 V AC  |                                       | kA   | -         | _      |               | -     | _                                  | _           | _                    |    |

<sup>1)</sup> Size 1 with  $I_{n \text{ max}} \le 1250 \text{ A}$ 2) Size 1 with  $I_{n \text{ max}} \ge 1600 \text{ A}$ 

<sup>3)</sup> Size 2 with  $I_{\text{n max}} \le 2500 \text{ A}$ Size 2 with  $I_{\text{n max}} \ge 3200 \text{ A}$ 

<sup>&</sup>lt;sup>5)</sup> At rated operational voltage  $U_{\rm e}$  > 690 V, the  $I_{\rm cw}$  value of the circuit breaker corresponds to the  $I_{\rm cu}$  or  $I_{\rm cs}$ value <sup>6)</sup> For breakers with Z options A05 and A16  $I_{\rm cu}$  =  $I_{\rm cs}$  = 85 kA <sup>7)</sup> For breakers with Z options A05 and A16  $I_{\rm cw}$  = 85 kA <sup>8)</sup> For breakers with Z options A05 and A16  $I_{\rm cw}$  = 70 kA

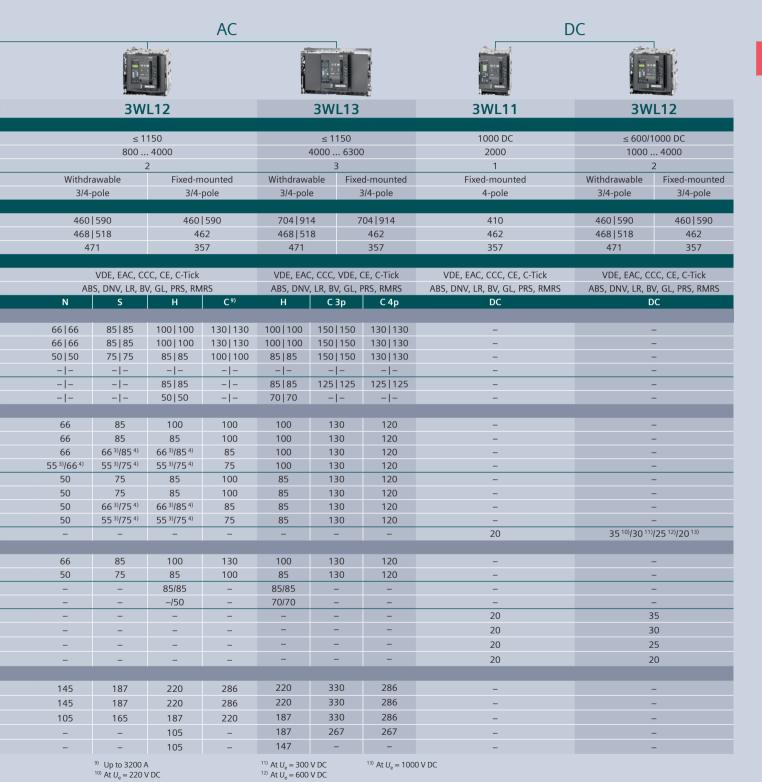

3WL10

mechanism on the 3WL10, no spare part of components.

3WL11

# 3WL1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2

| Rated current I <sub>n</sub>  |   |                                   | 630 A      | 800 A         | 1000 A   | 1250 A               | 1000 A                | 1250 A   |
|---|---|-----------------------------------|------------|---------------|--|----------------------|-----------------------|--|
| General data  |   |                                   |            |               |  |                      |                       |  |
| Isolating function acc. to IEC 60947-2  |   |                                   |            |               | Yes  |                      | Y                     | es   |
| Utilization category  |   |                                   |            |               | В  |                      | I                     | В  |
| Permissible ambient temperature   | During operation (in operation with LCD max. 55 °C)                             |                                   |            |               | 5 +70  |                      |                       | +70  |
| Mounting position   | Storage   | ℃                                 |            | -4            | 0 +70  | 9679                 | 30°,30°,              | +80<br>30° 30°                                 |
|   |   |                                   |            |               |  | 1201_19              | NSE0_00061a           | NSE0_00062a                                    |
| Degree of protection  |   |                                   | I          | P30 with do   | ut cabinet do<br>oor sealing fra<br>with cover |                      | door, IP41<br>sealing | out cabinet<br>with door<br>frame,<br>th cover |
| Voltage   |   |                                   |            |               |  |                      |                       |  |
| Rated operational voltage $U_{\rm e}$ at 50/60 Hz   | 1000 V version  | V AC                              |            |               | ≤ 690  |                      | 690/                  | 1000   |
| Rated insulation voltage U <sub>i</sub>   |   | V AC                              |            |               | 1000   |                      | 10                    | 000  |
| Rated impulse withstand voltage $U_{\rm imp}$   | Main conducting paths   | kV                                |            |               | 12   |                      | 1                     | 2  |
|   | Auxiliary circuits  | kV                                |            |               | 4  |                      | 4                     | 4  |
|   | Control circuits 9)   | kV                                |            |               | 2.5  |                      | 2                     | .5   |
| Rated rotor operational voltage $U_{\rm er}$  |   | V                                 |            |               |  |                      | 20                    | 000  |
| Permissible load for withdrawable version   |   |                                   |            |               |  |                      |                       |  |
| At rear horizontal main connections   | Up to 55 °C (Cu bare)   | A                                 | 630        | 800           | 1000   | 1250                 | 1000                  | 1250   |
|   | Up to 60 °C (Cu bare)   | A                                 | 630        | 800           | 1000   | 1250                 | 1000                  | 1250   |
| December 44   | Up to 70 °C   | A                                 | 630        | 800           | 1000   | 1250                 | 1000 <sup>8)</sup>    | 1210 <sup>8)</sup>                             |
| Power loss at I <sub>n</sub>  | Fixed-mounted circuit breaker   | W                                 | 31         | 50            | 78   | 122                  | 100                   | 105  |
| With 3-phase symmetrical load, complete device (3/4p)   | Withdrawable circuit breaker  | W                                 | 62         | 100           | 156  | 244                  | 195                   | 205  |
| Switching times   | Withdrawable circuit breaker  | vv                                | 02         | 100           | 150  | 211                  | 193                   | 203  |
| Make time   |   | ms                                | < 20       | < 20          | < 20   | < 20                 | 3                     | :5   |
| Opening time  |   | ms                                | < 20       | < 20          | < 20   | < 20                 |                       | 8  |
| Electrical make time (through closing coil)   | 5)  | ms                                | < 50       | < 50          | < 50   | < 50                 |                       | 30   |
| Electrical opening time (through shunt trip   |   | ms                                | < 35       | < 35          | < 35   | < 35                 | 7                     | '3   |
| Electrical opening time (instantaneous und  | lervoltage release)   | ms                                | < 50       | < 50          | < 50   | < 50                 | ≤ :                   | 80   |
| Opening time due to ETU, instantaneous sh   | nort-circuit release  | ms                                | 25         | 25            | 25   | 25                   | 5                     | 0  |
| Service life/endurance  |   |                                   |            |               |  |                      |                       |  |
| Breaking capacity N and S, 3/4-pole   |   |                                   |            |               |  |                      |                       |  |
| Mechanical  | Without maintenance   | Operating cycles                  | 20000 3)   | 20000 3)      | 20000 3)                                       | 20000 3)             | 15000                 | 15000  |
|   | With maintenance 6)   | Operating cycles                  | -          | -             | -  | -                    | 25000                 | 25000  |
| Electrical  | Without maintenance 440 V   | Operating cycles                  |            | 8000 3) 7)    | 8000 3) 7)                                     | 8000 3) 7)           | -                     | _  |
|   | Without maintenance 690 V   | Operating cycles                  | 8000 3) 7) | 8000 3) 7)    | 8000 3) 7)                                     | 6500 <sup>3)7)</sup> | 10000                 | 10000  |
|   | With maintenance 6)   | Operating cycles                  | -          | -             | -  | -                    | 25000                 | 25000  |
| Breaking capacity H, 3-pole   | MCI   | 0                                 |            |               |  |                      | 40000                 | 40000  |
| Mechanical  | Without maintenance   | Operating cycles                  | -          | -             | -  | -                    | 10000                 | 10000  |
| Electrical  | With maintenance 690 V  | Operating cycles Operating cycles | -          | -             | _  | -                    | 15000<br>7500         | 15000<br>7500                                  |
| Liectrical  | Without maintenance 690 V Without maintenance 1000 V, with Z option: A05        | Operating cycles                  | _          | -             | -  | -                    | 1000                  | 1000   |
|   | Without maintenance 1150 V, with Z option: A15                                  | Operating cycles                  | -          | -             | -  | -                    | -                     | -  |
|   | With maintenance 6)   | Operating cycles                  | -          | -             | -  | -                    | 15000                 | 15000  |
| 1) The LCD on the 3WL10 is always active. 2) 4000 A, size 2 in fixed-mounted version, 3-pole 3) 2000 in conjunction with mechanical interlock | 4) ETU76B with graphics display can be 5) Make time through closing coil for sy | ynchronization                    | chutes (s  | see operating | Replacing main of instructions). Go            | easing the brea      | ker                   |  |

purposes (short-time excited) 50 ms.

3) 2000 in conjunction with mechanical interlock

3WL12

3WL13

| JVVLII                                |                |                         |                    | ۷ ک                | V L I Z                      |                |                    |                    |               | JVVLIJ                              |                    |
|---------------------------------------|----------------|-------------------------|--------------------|--------------------|------------------------------|----------------|--------------------|--------------------|---------------|-------------------------------------|--------------------|
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
| 1600 A 2000 A                         | 800 A          | 1000 A                  | 1250 A             | 1600 A             | 2000 A                       | 2500 A         | 3200 A             | 4000 A             | 4000 A        | 5000 A                              | 6300 A             |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
| Yes                                   |                |                         |                    |                    | Yes                          |                |                    |                    |               | Yes                                 |                    |
| В                                     |                |                         |                    |                    | В                            |                |                    |                    |               | В                                   |                    |
| -40 +70                               |                |                         |                    | -40                | ) +70                        |                |                    |                    |               | -40 +70                             |                    |
| -40 +80                               |                |                         |                    | -40                | ) +80                        |                |                    |                    |               | -40 +80                             |                    |
| Dhmax.                                |                | NSEO_00061a NSEO_00062a |                    |                    |                              |                |                    |                    | 30° 30° × E   | NSEO_00927                          |                    |
| IP20 without cabine                   |                |                         |                    |                    | ut cabinet do                |                |                    |                    |               | without cabinet                     |                    |
| door, IP41 with doo<br>sealing frame, |                |                         |                    |                    | or sealing fra<br>with cover | ame,           |                    |                    |               | ith door sealing<br>IP55 with cover |                    |
| IP55 with cover                       |                |                         |                    | IF35 V             | with cover                   |                |                    |                    |               | ii 33 witii cover                   |                    |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
| 690/1000                              |                |                         |                    | 690/1              | 000/1150                     |                |                    |                    |               | 690/1000/1150                       |                    |
| 1000                                  |                |                         |                    | ≤                  | 1150                         |                |                    |                    |               | ≤ 1150                              |                    |
| 12                                    |                |                         |                    |                    | 12                           |                |                    |                    |               | 12                                  |                    |
| 4                                     |                |                         |                    |                    | 4                            |                |                    |                    |               | 4                                   |                    |
| 2.5                                   |                |                         |                    |                    | 2.5                          |                |                    |                    |               | 2.5                                 |                    |
| 2000                                  |                |                         |                    | 4                  | 2000                         |                |                    |                    |               | 2000                                |                    |
| 1600 2000                             | 800            | 1000                    | 1250               | 1600               | 2000                         | 2500           | 3200               | 3950               | 4000          | 5000                                | 5920               |
| 1600 2000                             | 800            | 1000                    | 1250               | 1600               | 2000                         | 2500           | 3020               | 3810               | 4000          | 5000                                | 5810               |
| 1490 <sup>8)</sup> 1780 <sup>8)</sup> | 8008)          | 1000 8)                 | 1250 <sup>8)</sup> | 1600 <sup>8)</sup> | 2000                         | 22808)         | 2870 <sup>8)</sup> | 3600 <sup>8)</sup> | 4000 8)       | 5000 <sup>8)</sup>                  | 5500 <sup>8)</sup> |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
| 150 240                               | 40             | 45                      | 80                 | 85                 | 180                          | 270            | 410                | 750                | 520           | 630                                 | 900                |
| 350 440                               | 85             | 95                      | 165                | 175                | 320                          | 520            | 710                | 925                | 810           | 1050                                | 1600               |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
| 35                                    |                |                         |                    |                    | 35                           |                |                    |                    |               | 35                                  |                    |
| 38                                    |                |                         |                    |                    | 34                           |                |                    |                    |               | 34                                  |                    |
| 80<br>73                              |                |                         |                    |                    | 100                          |                |                    |                    |               | 100                                 |                    |
|                                       |                |                         |                    |                    | 73<br>≤ 80                   |                |                    |                    |               | 73<br>≤ 80                          |                    |
| 50                                    |                |                         |                    |                    | 50                           |                |                    |                    |               | 50                                  |                    |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |
| 15000 15000                           | 10000          | 10000                   | 10000              | 10000              | 10000                        | 10000          | 10000              | 10000              | -             | -                                   | -                  |
| 25000 25000                           | 17500          | 17500                   | 17500              | 17500              | 17500                        | 17500          | 17500              | 17500              | -             | -                                   | -                  |
|                                       | -              | -                       | -                  | -                  | -                            | -              | -                  | -                  | -             | -                                   | -                  |
| 10000 7500                            | 7500           | 7500                    | 7500               | 7500               | 7500                         | 7500           | 4000               | 2000 3)            | -             | -                                   | -                  |
| 25000 25000                           | 17500          | 17500                   | 17500              | 17500              | 17500                        | 17500          | 17500              | 17500              | -             | -                                   | -                  |
| 10000 10000                           | 10000          | 10000                   | 10000              | 10000              | 10000                        | 10000          | 10000              | 10000              | E000          | E000                                | F000               |
| 10000 10000<br>15000 15000            | 10000<br>15000 | 10000<br>15000          | 10000<br>15000     | 10000<br>15000     | 10000<br>15000               | 10000<br>15000 | 10000<br>15000     | 10000<br>15000     | 5000<br>10000 | 5000<br>10000                       | 5000<br>10000      |
| 7500 7500                             | 7500           | 7500                    | 7500               | 7500               | 7500                         | 7500           | 4000               | 2000               | 2000          | 2000                                | 2000               |
| 1000 1000                             | 1000           | 1000                    | 1000               | 1000               | 1000                         | 1000           | 1000               | 1000               | 1000          | 1000                                | 1000               |
| .000                                  | .000           | . 300                   |                    |                    |                              |                | . 300              |                    |               |                                     |                    |
|                                       | 500            | 500                     | 500                | 500                | 500                          | 500            | 500                | 500                | 500           | 500                                 | 500                |
| 15000 15000                           | 15000          | 15000                   | 15000              | 15000              | 15000                        | 15000          | 15000              | 15000              | 10000         | 10000                               | 10000              |
|                                       |                |                         |                    |                    |                              |                |                    |                    |               |                                     |                    |

Periodic greasing of breaker mechanism on the 3WL10 (see Manual), no spare part of components
 Cu painted black

3WL11

 $<sup>^{9)}</sup>$  Motorized operating mechanisms  $U_{\rm imp}$  = 1.2 kV  $^{10)}$  For 3WL size 2 4000 A and size 3 6300 A with rear vertical main connections.

# 3WL1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

|   |   |                      |  | i i        |                                     |   | 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -                      |                                  |  |
|---|---|----------------------|--|------------|-------------------------------------|---|--|----------------------------------|--|
| Rated current I <sub>n</sub>  |   |                      | 630 A                                  | 800 A      | 1000 A                              | 1250 A  | 1000 A   | 1250 A                           |  |
| Service life/endurance  |   |                      |  |            |                                     |   |  |                                  |  |
| Breaking capacity H, 4-pole   |   |                      |  |            |                                     |   |  |                                  |  |
| Mechanical  | Without maintenance   | Operating cycles     | -                                      | -          | -                                   | -   | 10000  | 10000                            |  |
|   | With maintenance 1)   | Operating cycles     | -                                      | -          | -                                   | -   | 15000  | 15000                            |  |
| Electrical  | Without maintenance 690 V   | Operating cycles     | -                                      | -          | -                                   | -   | 7500   | 7500                             |  |
|   | Without maintenance 1000 V  | Operating cycles     | -                                      | -          | -                                   | -   | 1000   | 1000                             |  |
|   | Without maintenance 1150 V 2)   | Operating cycles     | -                                      | -          | -                                   | -   | -  | -                                |  |
|   | With maintenance 1)   | Operating cycles     | -                                      | -          | -                                   | -   | 10000  | 10000                            |  |
| Breaking capacity C   |   |                      |  |            |                                     |   |  |                                  |  |
| Mechanical  | Without maintenance   | Operating cycles     | -                                      | -          | -                                   | -   | -  | -                                |  |
|   | With maintenance 1)   | Operating cycles     | -                                      | -          | -                                   | -   | -  | -                                |  |
| Electrical  | Without maintenance 690 V   | Operating cycles     | -                                      | -          | -                                   | -   | -  | -                                |  |
|   | With maintenance 690 V 1)   | Operating cycles     | -                                      | -          | -                                   | -   | -  | _                                |  |
| Connection  |   |                      |  |            |                                     |   |  |                                  |  |
| Minimum main conductor cross-sections   | 5   |                      |  |            |                                     |   |  |                                  |  |
| Copper bars, bare   |   | Unit×mm×mm           | 2 × 40 × 5                             | 2 × 50 × 5 |                                     | 2 × 50 × 10 <sup>3)</sup><br>2 × 50 × 8 <sup>3)</sup> | 1 × 60 × 10  | 2 × 40 × 10                      |  |
| Copper bars, painted black  |   | Unit×mm×mm           | -                                      | -          | -                                   | -   | 1 × 60 × 10  | 2 × 40 × 10                      |  |
| Auxiliary conductor (Cu) max. number o  | f auxiliary conductors × cross-sec  | tion (solid/stranded | 1)                                     |            |                                     |   |  |                                  |  |
| Standard connection = screw   | Without end sleeve  |                      |  | -          |                                     | (AWG 20   | 2 × 1.5 mm <sup>2</sup><br>0 16);<br>n <sup>2</sup> (AWG 14) |                                  |  |
|   | With end sleeve acc. to DIN 46228   | -                    |  |            |                                     | (AWG 2  | × 1.5 mm <sup>2</sup><br>0 16)                               |                                  |  |
|   | With twin end sleeve  |                      |  |            | -                                   | (AWG 2  | 2 × 0.5 2 × 1.5 mm <sup>2</sup><br>(AWG 20 16)               |                                  |  |
| Screwless connection technology   | Without end sleeve  |                      | 0.5 2.5 mm <sup>2</sup><br>(AWG 20 14) |            |                                     |   | 2 × 0.5 2 × 2.5 mm <sup>2</sup><br>(AWG 20 14)               |                                  |  |
|   | With end sleeve acc. to DIN 46228   | 3 Part 2             |  |            | 1.5 mm <sup>2</sup><br>G 20 16)     |   |  | 2 × 1.5 mm <sup>2</sup><br>0 16) |  |
| Position signaling switch   |   |                      |  |            |                                     |   |  |                                  |  |
| Screwless connection technology   |   |                      |  |            | 1 × 2.5 mm <sup>2</sup><br>G 20 14) | 2   |  | × 2.5 mm²<br>0 14)               |  |
| Weights   |   |                      |  |            |                                     |   |  |                                  |  |
| 3-pole  | Fixed-mounted circuit breaker   | kg                   |  |            | 14                                  |   | 43   | 43                               |  |
|   | Withdrawable circuit breaker (without guide frames)                               | kg                   |  |            | 17.3                                |   | 45   | 45                               |  |
|   | Guide frames  | kg                   |  |            | 21                                  |   | 25   | 25                               |  |
| 4-pole  | Fixed-mounted circuit breaker   | kg                   |  |            | 16                                  |   | 50   | 50                               |  |
|   | Withdrawable circuit breaker (without guide frames)                               | kg                   |  |            | 19.3                                |   | 54   | 54                               |  |
|   | Guide frames  | kg                   |  |            | 25                                  |   | 30   | 30                               |  |
| Maintenance means: Replacing main contact<br>elements and arc chutes     (see operating instructions) | 2) Size 2 with order code "A15" and size<br>Data for very high breaking capacity. |                      | 3) Horizonta<br>4) Vertical            | al         |                                     |   |  |                                  |  |

3WL10

3WL11

(see operating instructions).

<sup>1/80</sup> 



| 1600 A              | 2000 A                | 800 A         | 1000 A        | 1250 A        | 1600 A        | 2000 A                 | 2500 A         | 3200 A       | 4000 A        | 4000 A                          | 5000 A                           | 6300 A       |  |
|---------------------|-----------------------|---------------|---------------|---------------|---------------|------------------------|----------------|--------------|---------------|---------------------------------|----------------------------------|--------------|--|
|                     |                       |               |               |               |               |                        |                |              |               |                                 |                                  |              |  |
|                     |                       |               |               |               |               |                        |                |              |               |                                 |                                  |              |  |
| 10000               | 10000                 | 10000         | 10000         | 10000         | 10000         | 10000                  | 10000          | 10000        | 10000         | 5000                            | 5000                             | 5000         |  |
| 15000               | 15000                 | 15000         | 15000         | 15000         | 15000         | 15000                  | 15000          | 15000        | 15000         | 10000                           | 10000                            | 10000        |  |
| 7500                | 7500                  | 7500          | 7500          | 7500          | 7500          | 7500                   | 7500           | 4000         | 2000          | 2000                            | 2000                             | 2000         |  |
| 1000                | 1000                  | 1000          | 1000          | 1000          | 1000          | 1000                   | 1000           | 1000         | 1000          | 1000                            | 1000                             | 1000         |  |
|                     | -                     | 500           | 500           | 500           | 500           | 500                    | 500            | 500          | 500           | 500                             | 500                              | 500          |  |
| 10000               | 10000                 | 15000         | 15000         | 15000         | 15000         | 15000                  | 15000          | 15000        | 15000         | 10000                           | 10000                            | 10000        |  |
|                     |                       | 5000          | 5000          | 5000          | 5000          | 5000                   | 5000           | 5000         |               | 5000                            | 5000                             | 5000         |  |
|                     |                       | 10000         | 10000         | 10000         | 10000         | 10000                  | 10000          | 10000        | _             | 10000                           | 10000                            | 10000        |  |
|                     |                       | 5000          | 5000          | 5000          | 5000          | 5000                   | 5000           | 4000         |               | 10000                           | 10000                            | 10000        |  |
|                     |                       | 10000         | 10000         | 10000         | 10000         | 10000                  | 10000          | 8000         | _             | 1000                            | 1000                             | 1000         |  |
|                     |                       | 10000         | 10000         | 10000         | 10000         | 10000                  | 10000          | 8000         |               |                                 |                                  |              |  |
|                     |                       |               |               |               |               |                        |                |              |               |                                 |                                  |              |  |
| 2 E0 10             | 2 v E0 v 10           | 1 E0 10       | 1 60 10       | 2 40 10       | 2 v E0 v 10   | 2 v E0 v 10            | 2 100 10       | 2 100 10     | 1 120 10      | 4 × 100 × 10                    | 6 × 100 × 10                     | 6 120 1      |  |
| 2 × 50 × 10         | 3 × 50 × 10           | 1 × 50 × 10   | 1 × 00 × 10   | 12 × 40 × 10  | 2 × 50 × 10   | 3 × 50 × 10            | 2 × 100 × 10   | 3 × 100 × 10 | 4 × 120 × 10  | 4 × 100 × 10                    | 6 × 100 × 10                     | 6 × 120 × 11 |  |
| 2 × 50 × 10         | 3 × 50 × 10           | 1 × 50 × 10   | 1 × 60 × 10   | 2 × 40 × 10   | 2 × 50 × 10   | 3 × 50 × 10            | 2 × 100 × 10   | 3 × 100 × 10 | 4 × 100 × 10  | 4 × 100 × 10                    | 6 × 100 × 10                     | 6 × 120 × 10 |  |
| 2 11 30 11 10       | 3 11 30 11 10         | 7 11 20 11 10 | 1 11 00 11 10 | 2 11 10 11 10 | 2 11 50 11 10 | 5 50 10                | 2 11 100 11 10 | 5 W 100 W 10 | 1 1 100 11 10 | 711 700 11 70                   | 0 11 100 11 10                   | 011120111    |  |
| 2 × 0.5 2           | × 1.5 mm <sup>2</sup> |               | _             | _             | 2 × 0.5       | . 2 × 1.5 mm           | 2              | _            | _             | 2 x                             | 0.5 2 × 1.5 n                    | nm²          |  |
| (AWG 20             |                       |               |               |               |               | 20 16);                |                |              |               |                                 | (AWG 20 16)                      |              |  |
| 1 × 2.5 mm          | <sup>2</sup> (AWG 14) |               |               |               | 1 × 2.5 m     | m² (AWG 14             | .)             |              |               | 1 ×                             | $2.5  \text{mm}^2 \text{ (AWG)}$ | 14)          |  |
| 1 × 0.5 1           |                       |               |               |               |               | . 1 × 1.5 mm           | 2              |              |               |                                 | 0.5 1 × 1.5 n                    |              |  |
| (AWG 2              |                       |               |               |               |               | 20 16)                 |                |              |               |                                 | (AWG 20 16)                      |              |  |
| 2 × 0.5 2           |                       |               |               |               |               | . 2 × 1.5 mm           | 2              |              |               | 2 × 0.5 2 × 1.5 mm <sup>2</sup> |                                  |              |  |
| (AWG 2)             |                       |               |               |               |               | 20 16)                 | 2              |              |               |                                 | (AWG 20 16)                      |              |  |
| 2 × 0.5 2<br>(AWG 2 |                       |               |               |               |               | . 2 × 2.5 mm<br>20 14) | <sup>2</sup>   |              |               |                                 | 0.5 2 × 2.5 n<br>(AWG 20 14)     |              |  |
| 2 × 0.5 2           |                       |               |               |               |               | 20 14)<br>. 2 × 1.5 mm | 2              |              |               |                                 | 0.5 2 × 1.5 n                    |              |  |
| (AWG 2              |                       |               |               |               |               | 20 16)                 |                |              |               | 2 ^                             | (AWG 20 16)                      |              |  |
|                     |                       |               |               |               |               |                        |                |              |               |                                 | ,                                |              |  |
| 1 × 0.5 1           | × 2.5 mm <sup>2</sup> |               |               |               | 1 × 0.5       | . 1 × 2.5 mm           | 2              |              |               | 1 x                             | 0.5 1 × 2.5 n                    | nm²          |  |
| (AWG 2              |                       |               |               |               | (AWG          | 20 14)                 |                |              |               |                                 | (AWG 20 14)                      |              |  |
|                     |                       |               |               |               |               |                        |                |              |               |                                 |                                  |              |  |
| 43                  | 43                    | 56            | 56            | 56            | 56            | 56                     | 59             | 64           | 85            | 82                              | 82                               | 90           |  |
| 45                  | 45                    | 60            | 60            | 60            | 60            | 60                     | 63             | 68           | 121           | 88                              | 88                               | 96           |  |
|                     |                       |               |               |               |               |                        |                |              |               |                                 |                                  |              |  |
| 25                  | 25                    | 31            | 31            | 31            | 31            | 31                     | 39             | 45           | 52            | 60                              | 60                               | 70           |  |
| 50                  | 50                    | 67            | 67            | 67            | 67            | 67                     | 71             | 77           | 103           | 99                              | 99                               | 108          |  |
| 54                  | 54                    | 72            | 72            | 72            | 72            | 72                     | 76             | 82           | 146           | 106                             | 106                              | 108          |  |
| 30                  | 30                    | 37            | 37            | 37            | 37            | 37                     | 47             | 54           | 62            | 84                              | 84                               | 119          |  |
|                     |                       |               |               |               |               |                        |                |              |               |                                 |                                  |              |  |

## 3WL1 non-automatic circuit breakers for DC

3WL11

IEC 60947-2

| Rated current I <sub>n</sub>  |                                |                  | 2000 A   | 1000 A   | 2000 A   | 4000 A     |
|---|--------------------------------|------------------|--|--|----------|------------|
| General data  |                                |                  |  |  |          |            |
| Size  |                                |                  | 1  |  | 2        |            |
| Isolating function acc. to IEC 60947-                                       | 2                              |                  | Yes  |  | Yes      |            |
| Utilization category  |                                |                  | В  |  | В        |            |
| Permissible ambient temperature   | Operation                      | °C               | -40 +70  |  | -40 +70  |            |
|   | Storage                        | °C               | -40 +80  |  | -40 +80  |            |
| Mounting position   |                                |                  | NSE0_00061a NSE0_00062a  | 30°30° 30°30° 30° 30° 30° 30° 30° 30° 30                                       |          | NSEC_00927 |
| Degree of protection  |                                |                  | IP20 without cabinet door,<br>IP41 with door sealing frame,<br>IP55 with cover | IP20 without cabinet door,<br>IP41 with door sealing frame,<br>IP55 with cover |          |            |
| Voltage   |                                |                  |  |  |          |            |
| Rated operational voltage $U_{\rm e}$ at 50/60 Hz                           | 1000 V version                 | V DC             | 1000   |  | 600/1000 |            |
| Rated insulation voltage U <sub>i</sub>                                     |                                | V DC             | 1000   |  | 1000     |            |
| Rated impulse withstand voltage   | Main conducting paths          | kV               | 12   |  | 12       |            |
| $U_{\rm imp}$   | Auxiliary circuits             | kV               | 4  | 4  |          |            |
|   | Control circuits               | kV               | 2.5  |  | 2.5      |            |
| Permissible load  |                                |                  |  |  |          |            |
| At rear horizontal main connections   | Up to 40 °C (Cu black painted) | Α                | 2000   | 1000   | 2000     | 4000       |
|   | Up to 55 °C (Cu black painted) | Α                | 1910   | 1000   | 2000     | 3640       |
|   | Up to 60 °C (Cu black painted) | Α                | 1850   | 1000   | 2000     | 3500       |
|   | Up to 70 °C (Cu black painted) | Α                | 1710   | 1000   | 1950     | 3250       |
| Power loss at I   | op to the o (our class)        |                  |  |  |          |            |
| With symmetrical load   | Withdrawable circuit breaker   | W                | 150  | 280  | 770      | 1640       |
| Switching times   | William awabie emeant breaker  |                  | 150  | 200  | 770      | 1010       |
| Make time   |                                | ms               | 35   |  | 35       |            |
| Opening time  |                                | ms               | 38   |  | 34       |            |
| Electrical make time (through activat                                       | tion solenoid) 1)              | ms               | 100  |  | 100      |            |
| Electrical make time (through activate Electrical opening time (through shu |                                | ms               | 73   |  | 73       |            |
| Electrical opening time (instantaneo  |                                | ms               |  |  |          |            |
| Service life/endurance 3)   | us undervoitage release)       | 1115             | ≤ 60   |  | ≥ 00     |            |
| Mechanical  | Without maintenance            | Operating cycles | 10000  | 10000  | 10000    | 10000      |
|   | With maintenance 2)            | Operating cycles | 15000  | 17500  | 17500    | 17500      |
| Electrical  | Without maintenance            | Operating cycles | 1000   | 6000   | 6000     | 4000       |
|   | Without maintenance 1000 V     | Operating cycles | 1000   | 1000   | 1000     | 1000       |
|   | With maintenance 2)            | Operating cycles | 2000   | 17500  | 17500    | 17500      |

 $<sup>^{1)}</sup>$  Make time through activation solenoid for synchronization purposes (short-time excited) 50 ms.


3WL12

<sup>2)</sup> Maintenance means: Replace main contact elements and arc chutes (see operating instructions).

<sup>3)</sup> Further technical specifications on request.

<sup>4)</sup> At  $U_e = 220 \text{ V DC}$ 5) At  $U_e = 300 \text{ V DC}$ 

<sup>&</sup>lt;sup>6)</sup> At  $U_e = 600 \text{ V DC}$ <sup>7)</sup> At  $U_e = 1000 \text{ V DC}$ 



|   |  |  | 1  |  |  |        |  |
|---|--|--|--|--|--|--------|--|
| Rated current I <sub>n</sub>              |  |  | 2000 A   | 1000 A   | 2000 A                                   | 4000 A |  |
| Short-circuit breaking capacity           | I <sub>cc</sub>                          |  |  |  |  |        |  |
| Up to 220 V DC                            |  | kA                                       | 20   |  | 35                                       |        |  |
| Up to 300 V DC                            |  | kA                                       | 20   |  | 30                                       |        |  |
| Up to 600 V DC                            |  | kA                                       | 20   |  | 25                                       |        |  |
| Up to 1000 V DC                           |  | kA                                       | 20   |  | 20                                       |        |  |
| Rated short-time withstand cu             | rrent I <sub>cw</sub>                    |  |  |  |  |        |  |
| 0.5 s                                     |  | kA                                       | -  |  | -  |        |  |
| 1 s                                       |  | kA                                       | 20   | 35   | 4)/30 <sup>5)</sup> /25 <sup>6)</sup> /2 | 0 7)   |  |
| 2 s                                       |  | kA                                       | -  |  | -  |        |  |
| 3 s                                       |  | kA                                       | -  | -  |  |        |  |
| Connection                                |  |  |  |  |  |        |  |
| Auxiliary conductor (Cu) max.             | number of auxiliary conductors × cross-s | ection (solid                            | stranded)                                      |  |  |        |  |
| Standard connection = strain-relief clamp | Without end sleeve                       | Without end sleeve                       |  |  | 0.5 2 × 1.5<br>0 16); 1 × 2<br>(AWG 14)  |        |  |
|   | With end sleeve acc. to DIN 46228 Pa     | With end sleeve acc. to DIN 46228 Part 2 |  | 1 × 0.5 1 × 1.5 mm <sup>2</sup><br>(AWG 20 16) |  |        |  |
|   | With twin end sleeve                     |  | 2 × 0.5 2 × 1.5 mm <sup>2</sup><br>(AWG 20 16) | 2 × 0.5 2 × 1.5 mm <sup>2</sup><br>(AWG 20 16) |  |        |  |
| Optional connection = tension spring      | Without end sleeve                       |  | 2 × 0.5 2 × 2.5 mm <sup>2</sup><br>(AWG 20 14) | (  | ).5 2 × 2.5<br>AWG 20 14                 | .)     |  |
|   | With end sleeve acc. to DIN 46228 Pa     | art 2                                    | 2 × 0.5 2 × 1.5 mm <sup>2</sup><br>(AWG 20 16) |  | ).5 2 × 1.5<br>AWG 20 16                 |        |  |
| Weights                                   |  |  |  |  |  |        |  |
| 3-pole                                    | Fixed-mounted circuit breaker            | kg                                       | 43   | 56   | 56                                       | 64     |  |
|   | Withdrawable circuit breaker             | kg                                       | -  | 60   | 60                                       | 68     |  |
|   | Guide frames                             | kg                                       | -  | 31   | 31                                       | 45     |  |
| 4-pole                                    | Fixed-mounted circuit breaker            | kg                                       | 50   | 67   | 67                                       | 77     |  |
|   | Withdrawable circuit breaker             | kg                                       | -  | 72   | 72                                       | 82     |  |
|   | Guide frames                             | kg                                       | -  | 37   | 37                                       | 54     |  |

## 3WL1 non-automatic circuit breakers for DC

### **Application examples**

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

|  | Size 2   |                 | Size 1 and Size 2           |                 |
|--|--|-----------------|-----------------------------|-----------------|
| Required contact gaps at rated voltage 1)            | For 3-pole non-auto<br>breakers  | matic circuit   | For 4-pole non-automatic ci | rcuit breakers  |
|  | 1-pole   | 2-pole          | 1-pole                      | 2-pole          |
| Rated operational voltage up to 300 V                |  |                 |                             |                 |
| 1201_20262   | Grounded system 2)   | 1201_20306      | Grounded system 3)          | 1201-20319      |
| Rated operational voltage up to 600 V                |  |                 |                             |                 |
| 1201_20263   |  | Grounded system | Grounded system 2)          | 1201_20315      |
| Rated operational voltage up to 1000 V <sup>4)</sup> |  |                 |                             |                 |
| 1207_20264   | Section of the sectio |                 | Grounded system             | Grounded system |

|   | Size 1                                    |
|---|---|
| Required contact gaps at rated voltage 1) | For 4-pole non-automatic circuit breakers |
|   | 2-pole                                    |
| Rated operational voltage up to 1000 V 4) |   |
|   | + (-)                                     |
|   | Last                                      |
|   |   |

- 1) Contact gaps connected in series
- 2) 2 conducting paths in parallel
- 3) 3 conducting paths in parallel
- 4) Version for 1000 V required, order with "-Z" and order code A05
- 니• Grounded system

□ Load

## ETU electronic trip units

## With watchdog monitoring



| Pa   | sic protective functions  |  | ETU320 (LI)  | ETU350 (LSI)   | ETU360 (LSIG)  |
|------|---|--|--|--|--|
| L    | Overload protection (L tripping)                                      | Setting range of operating value $I_r = I_n \times$  | 0.4   0.5   0.6   0.7  <br>0.75   0.8   0.85   0.9  <br>0.95   1   Default 0.4 | 0.4   0.5   0.6   0.7  <br>0.75   0.8   0.85   0.9  <br>0.95   1   Default 0.4 | 0.4   0.5   0.6   0.7  <br>0.75   0.8   0.85   0.9  <br>0.95   1   Default 0.4   |
|      |   | Switchable overload protection (from <i>I</i> <sup>2</sup> <i>t</i> - to <i>I</i> <sup>4</sup> <i>t</i> -dependent function) | -  | -  | -  |
|      |   | Setting range of the delay $t_{\rm r}$ at $I^2t$ (Reference point $6 \times I_{\rm n}$ )                                     | 0.75   1   2   5   8   10  <br>14   17   21   25 s  <br>Default 0.75 s         | 0.75   1   2   5   8   10  <br>14   17   21   25 s  <br>Default 0.75 s         | 0.75   1   2   5   8   10  <br>14   17   21   25 s  <br>Default 0.75 s   |
|      |   | Setting range of the delay $t_{\rm r}$ at $I^{\rm f}t$ (Reference point $6\times I_{\rm n}$ )                                | -  | -  | -  |
|      |   | Thermal memory can be switched on/off  | Permanently switched on  | Permanently switched on  | Permanently switched on  |
|      |   | Phase failure sensitivity/asymmetry  | -  | -  | -  |
| S    | Short-time-delayed short-circuit protection (ST tripping)             | Setting range of operating value $I_{sd} = I_n \times$   | -  | 1   1.5   2   2.5   3   4  <br>6   8   10   Default OFF                        | 1   1.5   2   2.5   3   4   6<br>  8   10   Default OFF  |
|      |   | Setting range of the delay time $t_{\rm sd}$ at $l^2t$   | -  | $0.1 \mid 0.2 \mid 0.3 \mid 0.4 \mid$<br>$0.5 \mid (Ref. 10 \times I_n)$       | $0.1 \mid 0.2 \mid 0.3 \mid 0.4 \mid 0.5$<br>$\mid (Ref. 10 \times I_n)$   |
|      |   | Setting range of the delay time $t_{sd}$ ( $t = const.$ )  | -  | 0.08   0.15   0.22  <br>0.3   0.4 s  | 0.08   0.15   0.22   0.3  <br>0.4 s  |
|      |   | ZSI function   | -  | -  | -  |
| T    | Instantaneous short-circuit protection (INST tripping)                | Setting range $I_1 = I_n \times$   | OFF 1.5 2 3 4 6 <br>8 10 12 15   | OFF   1.5   2   3   4   6  <br>8   10   12   15                                | OFF 1.5 2 3 4 6 8<br> 10 12 15   |
| N    | Neutral conductor protection  | N conductor setting range $I_N = I_n \times$   | OFF   50%   100%  <br>200%   | OFF   50%   100%  <br>200%   | OFF   50%   100%  <br>200%   |
| G    | iround-fault tripping (GF tripping)                                   | Tripping function can be switched on/off   | -  | -  | •  |
|      | Detection of ground-fault current through summation current formation | Alarm function can be switched on/off  | -  | -  | Permanently switched on  |
|      | with internal or external neutral conductor transformer               | Detection of ground-fault current through external current transformer   | -  | -  | -  |
|      |   | Setting range of the operating current $I_g = I_n \times$  | -  | -  | 0.1 0.2 0.3 0.4 0.5 <br>0.6 0.7 0.8 1  |
|      |   | Setting range of the operating current $l_{\rm g}$ for alarm   | -  | -  | -  |
|      |   | Setting range of the delay time $t_{\mathrm{g}}$   | -  | -  | 0.1   0.2   0.4   0.6  <br>0.8 s   (fixed delay)   |
|      |   | Switchable ground-fault protection characteristic ( <i>I</i> <sup>2</sup> <i>t</i> -dependent function)                      | -  | -  | $t = \text{const.}/l^2 t \mid$<br>Default $l^2 t$  |
|      |   | Setting range of the delay time $t_{\rm g}$ at $l^2t$  | -  | -  | $0.1 \mid 0.2 \mid 0.4 \mid 0.6 \mid 0.8 \text{ s}$<br>$(\text{Ref. } 2 \times I_n)$<br>$(I^2t \text{ dependent}) \mid$<br>$(I^2t \text{ Default } 0.1 \ (I^2t)$ |
|      |   | ZSI-G function   | -  | -  | -  |
| 1) 5 | sizes 1 and 2/size 3  |  | ■ Available  | – Not available/not presen   | t  |





| ETU650 (LSI)  | ETU660 (LSIG)  | ETU15B (LI)                                       | ETU25B (LSI)   | ETU27B (LSIG)  | ETU45B (LSIG)  | ETU76B (LSIG)   |
|---|--|---|--|--|--|---|
| 0.4 1   Default 1<br>(in steps of 0.001)              | 0.4 1   Default 1<br>(in steps of 0.001)                         | 0.5 0.55 0.6 0.65 <br>0.7 0.75 0.8 0.85 <br>0.9 1 | 0.4   0.45   0.5   0.55  <br>0.6   0.65   0.7   0.8  <br>0.9   1 | 0.4   0.45   0.5   0.55  <br>0.6   0.65   0.7   0.8  <br>0.9   1   | 0.4 0.45 0.5 0.55 <br>0.6 0.65 0.7 0.8 <br>0.9 1   | 0.4 1   |
| •   | •  | -   | -  | -  | •  | •   |
| 0.75 36 s  <br>(in steps of 0.25 s)  <br>Default 36 s | 0.75 36 s  <br>(in steps of 0.25 s)  <br>Default 36 s            | 10 s fixed  | 10 s fixed   | 10 s fixed   | 2 3.5 5.5 8 10 <br>14 17 21 25 30 s  | 2 30 s  |
| 0.75 5 s  <br>(in steps of 0.25 s)  <br>Default 5 s   | 0.75 5 s  <br>(in steps of 0.25 s)  <br>Default 5 s              | -   | -  | -  | 1 2 3 4 5s   | 1 5 s   |
| •   | •  | -   | -  | -  | •  | •   |
| 2% 90%<br>(default 50%)                               | 2% 90%<br>(default 50%)  | -   | At $t_{sd} = 20 \text{ ms (M)}$                                  | At $t_{sd} = 20 \text{ ms (M)}$  | At $t_{sd} = 20 \text{ ms (M)}$  | (on/off)  |
| 0.6 10   OFF  <br>(in steps of 0.1)                   | 0.6 10   OFF  <br>(in steps of 0.1)                              | -   | 1.25   1.5   2   2.5   3  <br>4   6   8   10   12                | 1.25   1.5   2   2.5   3  <br>4   6   8   10   12  | 1.25   1.5   2   2.5   3  <br>4   6   8   10   12   OFF  | 1.25 × <i>I</i> <sub>n</sub> 0.8 × <i>I</i> <sub>cw</sub> OFF |
| 0.05 0.5 s<br>(Ref. 10 × I <sub>n</sub> )             | 0.05 0.5 s<br>(Ref. 10 × I <sub>n</sub> )                        | -   | -  | -  | 100   200   300  <br>400 ms  | 100 400 ms  |
| 0.05 0.4 s  | 0.05 0.4 s   | -   | M (0.02 ms)   100  <br>200   300   400 ms                        | M (0.02 ms)   100  <br>200   300   400 ms  | M (0.02 ms)   100  <br>200   300   400 ms  | M (0.02 ms)  <br>80 4000 ms                                   |
| -   | -  | -   | -  | -  | Via module of the<br>CubicleBUS  | Via module of the <b>Cubicle</b> BUS                          |
| OFF   1.5 15  <br>(in steps of 0.1)                   | OFF   1.5 15  <br>(in steps of 0.1)                              | 2 3 4 5 6 7 8                                     | Fixed at $I_1 \ge 20 \times I_n$ , max. 50 kA                    | Fixed at $I_1 \ge 20 \times I_n$ , max. 50 kA  | OFF   1.5   2.2   3   4   6   8   10   12   0.8 × I <sub>cs</sub>  | OFF   $1.5 \times I_n \dots 0.8 \times I_{cs}$                |
| OFF   50%   100%  <br>150%   200%                     | OFF   50%   100%   200%  | -   | -  | 100%   | OFF   50%   100%   | OFF   20% 200%  |
| -   | •  | -   | -  | •  | •  | •   |
| -   | •  | -   | -  | -  | -  | •   |
| -   | Alternative Rc or G-ret<br>ground-fault<br>monitoring            | -   | -  | -  | •  | •   |
| _   | 0.1 1  <br>(in steps of 0.001)<br>$I_g = I_n \times$             | -   | -  | A <sup>1)</sup> (100/400 A)  <br>B <sup>1)</sup> (300/600 A);<br>C <sup>1)</sup> (600/800 A)  <br>D <sup>1)</sup> (900/1000 A);<br>E <sup>1)</sup> (1200/1200 A) | A <sup>1)</sup> (100/400 A)  <br>B <sup>1)</sup> (300/600 A);<br>C <sup>1)</sup> (600/800 A)  <br>D <sup>1)</sup> (900/1000 A);<br>E <sup>1)</sup> (1200/1200 A) | SZ 1, 2:<br>100 1200 A<br>SZ 3:<br>400 1200 A                 |
| -   | 50% 90% × <i>I<sub>r</sub></i>  <br>(in steps of 1%)<br>PreAlarm | -   | -  | -  | A <sup>1)</sup> (100/400 A);<br>B <sup>1)</sup> (300/600 A);<br>C <sup>1)</sup> (600/800 A);<br>D <sup>1)</sup> (900/1000 A);<br>E <sup>1)</sup> (1200/1200 A)   | SZ 1, 2:<br>100 1200 A<br>SZ 3:<br>400 1200 A                 |
| -   | 0.1 1 s   Default 0.1 s  <br>(in steps of 0.05 s)                | -   | -  | 100   200   300   400  <br>500 ms  | 100   200   300   400  <br>500 ms  | 100 500 ms  |
| -   | $t = \text{const.}/l^2t \mid$<br>Default const.                  | -   | -  | -  | •  | •   |
| -   | 0.1 1 s  <br>(in steps of 0.05 s)<br>(Ref. 2 × I <sub>n</sub> )  | -   | -  | -  | 100   200   300   400  <br>500 ms  | 100 500 ms  |
| -   | -  | -   | -  | -  | Via module of the <b>Cubicle</b> BUS   | Via module of the <b>Cubicle</b> BUS                          |

## ETU electronic trip units

## With watchdog monitoring (continued)



|   | ETU320 (LI) | ETU350 (LSI)                | ETU360 (LSIG) |
|---|-------------|-----------------------------|---------------|
|   |             |                             |               |
| Parameter set changeover Switchable between parameter set A and B                                 | -           | -                           | -             |
| LCD   | -           | -                           | -             |
| Voltage tap on top/bottom   | -           | -                           | -             |
| Metering function   | -           | -                           | -             |
|   |             |                             |               |
|   |             |                             |               |
| Tripping as a result of enhanced protective function:   | -           | -                           | -             |
| (including: phase asymmetry current/voltage, harmonic distortion current/voltage, under/          |             |                             |               |
| overvoltage, phase rotation direction, active power in/opposite to normal direction, under/       |             |                             |               |
| over-frequency, protective functions dependent on direction of power flow)                        |             |                             |               |
| Mode of communication   |             |                             |               |
| Communication PROFIBUS   PROFINET   Modbus RTU   Modbus TCP                                       | -           | -                           | -             |
| Output modules  |             |                             |               |
| Signals via relay: Overload warning, load shedding/load carrying, leading signal, overload        | IOM300      | IOM300                      | IOM300        |
| tripping 200 ms, temperature alarm, phase asymmetry, instantaneous short-circuit release,         |             |                             |               |
| short-time-delayed short-circuit release, overload trip, neutral conductor trip, auxiliary relay, |             |                             |               |
| ETU faults, ground-fault protection tripping and ground-fault alarm (only with ground-fault       |             |                             |               |
| protection module)  |             |                             |               |
|   | ■ Available | - Not available/not present |               |

### Increment size when settings are made for the ETU76B using the menu

| From to    | Increment size |
|------------|----------------|
| 0 1        | 0.1            |
| 1 100      | 1              |
| 100 500    | 5              |
| 500 1000   | 10             |
| 1000 1600  | 50             |
| 1600 10000 | 100            |
| 10000 max. | 1000           |



| ETU650 (LSI)   | ETU660 (LSIG)  | ETU15B (LI)  | ETU25B (LSI) | ETU27B (LSIG) | ETU45B (LSIG)             | ETU76B (LSIG)             |
|----------------|----------------|--------------|--------------|---------------|---------------------------|---------------------------|
| £10030 (£31)   | L TOOGO (LSTG) | LTO TSB (LI) | ETOESD (ESI) | LTOZYB (LSIG) | ETO ISB (ESIG)            | ETOYOB (ESIG)             |
|                |                | -            | -            | -             | -                         |                           |
| Integrated     | Integrated     | -            | -            | -             | Optional                  | Integrated                |
| Optional       | Optional       | -            | -            | -             | Optional                  | Optional                  |
| Basic/Advanced | Basic/Advanced | -            | -            | -             | Metering function<br>Plus | Metering function<br>Plus |
|                |                |              |              |               |                           |                           |
| •              |                | -            | -            | -             |                           |                           |
|                |                |              |              |               |                           |                           |
|                |                |              |              |               |                           |                           |
|                |                |              |              |               |                           |                           |
|                |                | -            | -            | -             |                           |                           |
|                |                |              |              |               |                           |                           |
| IOM040/IOM300  | IOM040/IOM300  | -            | -            | -             | •                         | •                         |
|                |                |              |              |               |                           |                           |
|                |                |              |              |               |                           |                           |
|                |                |              |              |               |                           |                           |

## Connection


### Main circuit connection

|               | 3W              | /L10         |               | 3WL11 - | - 3WL13      |         |
|---------------|-----------------|--------------|---------------|---------|--------------|---------|
| Connection    | Fixed-mounted   | Withdrawable | Fixed-mounted |         | Withdrawable |         |
| Front-mounted | Direct          |              | 0000          | 0000    |              |         |
|               | Extended        | Extended     | 1-hole        | 2-hole  | 1-hole       | 2-hole  |
|               | Broadened       |              |               |         |              |         |
| Rear-mounted  | Vertical        | Vertical     | Verti         | cal     | Vertical     | Flanges |
|               | Horizontal      | Horizontal   | Horizo        |         | Horizo       |         |
|               |                 | Broadened    |               |         |              |         |
| Cable         | Cable terminals | Cable lug    |               |         |              |         |

### Auxiliary circuit connections

### 3WL10: Withdrawable/fixed-mounted version

• Direct engagement of the auxiliary conductor vertically onto the circuit breaker or horizontally in the guide frame



Screwless connection technology (push in)

### 3WL11 - 3WL13: Withdrawable version

- Connection of the internal auxiliary switches to the male connector on the switch side
- When fully inserted, connection with the sliding contact module in the guide frame

### 3WL11 - 3WL13: Fixed-mounted version

• Engagement of the auxiliary supply connectors directly onto the circuit breaker

Coding pins on the connectors prevent them being inserted in the wrong slots



Screw connection (standard)



Screwless connection (tension spring) (optional)

# Operating mechanism, auxiliary release, auxiliary switch

### Operating mechanism

The circuit breakers are available with various optional operating mechanisms:

- Manual operating mechanism with mechanical closing (standard design)
- Manual operating mechanism with mechanical and electrical closing
- Motorized operating mechanism with mechanical and electrical closing

The operating mechanisms with electrical closing are suitable for synchronization tasks.

|  | Available for | air circuit breakers |
|--|---------------|----------------------|
|  | 3WL10         | 3WL11 – 3WL13        |
| Closing coils (CC)   |               |                      |
| Undervoltage releases (UVR)/<br>shunt trips (ST)               |               |                      |
| Shunt trips (ST)   |               |                      |
| Remote trip alarm reset coils (RR)                             | •             |                      |
| Spring charging motors/<br>Motorized operating mechanisms (MO) |               |                      |
| Mechanical operating cycles counters                           | •             |                      |

## Online configurator highlights


### www.siemens.com/lowvoltage/3wl-configurator



## Automatic generation of the 3D model, 2D dimension drawing and the internal circuit diagram according to IEC



### Direct entry of an already known article number or parts of an article number

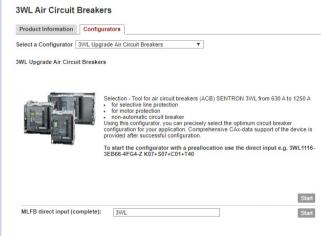


1

## Structure of the article numbers

### Basic configuration for AC circuit breakers

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

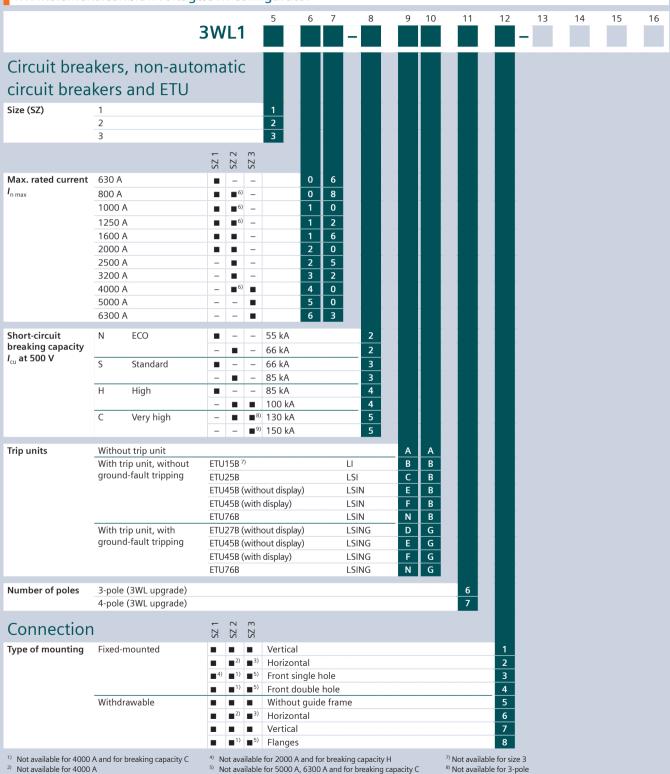

6) Not available for breaking capacity C

9) Not available for 4-pole

Not available for 6300 A


|                     |                                    | 3WL1 5   | 6 7    | 8                                  | [-]     | 9 1     | 10        | 11   | 12      | 13<br>- | 14 | 15     | 16 |
|---------------------|------------------------------------|--|--------|------------------------------------|---------|---------|-----------|------|---------|---------|----|--------|----|
| Operating           | machanicm                          | s and auviliany  | rolos  | 505                                |         |         |           |      |         |         |    |        |    |
| Operating           | mechanism                          | is and auxiliary                                       | reiea  | ses                                |         |         |           |      |         |         |    |        |    |
| Stored energy       | Manual                             | With mechanical operation                              |        |                                    |         |         |           |      |         | 1       |    |        |    |
| mechanism           | recharging of the<br>stored energy | With mechanical and electroperation, closing coil (CC) |        |                                    |         |         | 10 V DC   |      |         | 2       |    |        |    |
|                     | mechanism                          | for uninterrupted duty, 100                            |        | 230 V                              | AC 50/6 | 50 Hz/2 | 20 V DC   |      |         | 3       |    |        |    |
|                     | Motorized                          | With mechanical and elect                              | rical  | 208                                | 240 V   | AC 50/6 | 50 Hz/22  | 20 2 | 50 V DC | 4       |    |        |    |
|                     | recharging                         | operation, closing coil (CC)                           |        | 110                                | 127 V   | AC 50/6 | 50 Hz/1   | 10 1 | 25 V DC | 5       |    |        |    |
|                     |                                    | for uninterrupted duty, 100                            | U% OP  | 24 V D                             | C       |         |           |      |         | 6       |    |        |    |
| 1st auxiliary       | Without 1st auxilia                | ıry release  |        |                                    |         |         |           |      |         |         | А  |        |    |
| release             | With shunt trip                    | 24 V DC  |        |                                    |         |         |           |      |         |         | В  |        |    |
|                     | (ST) 100% OP                       | 30 V DC  |        |                                    |         |         |           |      |         |         | С  |        |    |
|                     |                                    | 48 V DC  |        |                                    |         |         |           |      |         |         | D  |        |    |
|                     |                                    | 60 V DC  |        |                                    |         |         |           |      |         |         | Е  |        |    |
|                     |                                    | 110 127 V AC 50/60 Hz/                                 | 110 12 | 5 V DC                             |         |         |           |      |         |         | F  |        |    |
|                     |                                    | 208 240 V AC 50/60 Hz/                                 | 220 25 | 0 V DC                             |         |         |           |      |         |         | G  |        |    |
| 2nd auxiliary       | Without 2nd auxili                 | arv release  |        |                                    |         |         |           |      |         |         |    | Α      |    |
| release             | With shunt trip (ST                |  |        | 24 V D                             | C       |         |           |      |         |         |    | В      |    |
|                     |                                    | ,  |        | 30 V D                             | C       |         |           |      |         |         |    | С      |    |
|                     |                                    |  |        | 48 V D                             | С       |         |           |      |         |         |    | D      |    |
|                     |                                    |  |        | 60 V D                             | С       |         |           |      |         |         |    | Е      |    |
|                     |                                    |  |        | 110                                | 127 V   | AC 50/6 | 50 Hz/1   | 10 1 | 25 V DC |         |    | F      |    |
|                     |                                    |  |        | 208                                | 240 V   | AC 50/6 | 50 Hz/22  | 20 2 | 50 V DC |         |    | G      |    |
|                     | With undervoltage                  | release (UVR), instantaneou                            | IS     | 24 V D                             | C       |         |           |      |         |         |    | J      |    |
|                     |                                    |  |        | 30 V D                             | C       |         |           |      |         |         |    | К      |    |
|                     |                                    |  |        | 48 V D                             |         |         |           |      |         |         |    | L      |    |
|                     |                                    |  |        | 60 V D                             |         |         |           |      |         |         |    | U      |    |
|                     |                                    |  |        | 110 127 V AC 50/60 Hz/110 125 V DC |         |         |           |      | M       |         |    |        |    |
|                     |                                    |  |        |                                    |         |         |           | 20 2 | 50 V DC |         |    | N      |    |
|                     | Mith walawaltaa                    | release (LIV/D +) 1)                                   | -      | 380<br>48 V D                      |         | AC 50/6 | 00 Hz     |      |         |         |    | P      |    |
|                     | With undervoltage delay 0.2 3.2 s  | release (UVR-L) 7,                                     |        |                                    |         | AC E016 | ≤0 H=/1 · | 10 1 | 25 V DC |         |    | Q<br>R |    |
|                     |                                    |  |        |                                    |         |         |           |      | 50 V DC |         |    | S      |    |
|                     |                                    |  |        |                                    |         | AC 50/6 |           | 20 2 | 30 V DC |         |    | T      |    |
|                     |                                    |  |        | 500                                | 115 (   | , 5010  | 70 112    |      |         |         |    |        |    |
| Auxiliary s         | witches                            |  |        |                                    |         |         |           |      |         |         |    |        |    |
| 1st auxiliary switc | h block                            | 2 NO + 2 NC  |        |                                    |         |         |           |      |         |         |    |        | 2  |
| 1st + 2nd auxiliary | switch block                       | 4 NO + 4 NC  |        |                                    |         |         |           |      |         |         |    |        | 4  |
| 1                   |                                    | 6 NO + 2 NC  |        |                                    |         |         |           |      |         |         |    |        | 7  |
|                     |                                    | 5 NO + 3 NC  |        |                                    |         |         |           |      |         |         |    |        | 8  |
|                     |                                    |  |        |                                    |         |         |           |      |         |         |    |        |    |

<sup>1)</sup> The maximum allowable cable length to the actuator for quick shutdown is currently  $\leq$  50 m (maximum allowable cable length between the terminals  $\leq$  100 m).

## Structure of the article numbers

### Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

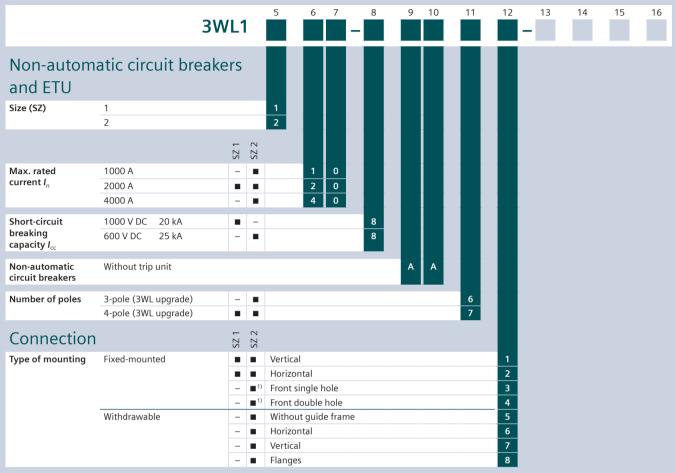

<sup>1)</sup> Not available for 4000 A

|                      |   | 3WL1 5  | 6 7                      | 8       | 9       | 10                   | 11     | 12      | 13          | 14 | 15     | 16 |
|----------------------|---|---|--------------------------|---------|---------|----------------------|--------|---------|-------------|----|--------|----|
|                      |   | _   |                          |         |         |                      |        |         |             |    |        |    |
| Operating            | mechanism                                       | is and auxiliary  | y releas                 | ses     |         |                      |        |         |             |    |        |    |
| Stored energy        | Manual  | With mechanical operati   | ion                      |         |         |                      |        |         | 1           |    |        |    |
| mechanism            | recharging of the<br>stored energy<br>mechanism | With mechanical and ele<br>operation, closing coil (of<br>for uninterrupted duty, 1 | CC) suitable             |         |         | Hz/110 V<br>Hz/220 V |        |         | 3           |    |        |    |
|                      | Motorized recharging                            | With mechanical and ele<br>operation, closing coil (0<br>for uninterrupted duty, 1  | ectrical<br>CC) suitable |         | 27 V AC | 50/60 Hz<br>50/60 Hz |        |         | 4<br>5<br>6 |    |        |    |
| 1st auxiliary        | Without 1st auxilia                             | rv release  |                          |         |         |                      |        |         |             | Α  |        |    |
| release              | With shunt trip                                 | 24 V DC   |                          |         |         |                      |        |         |             | В  |        |    |
|                      | (ST) 100% OP                                    | 30 V DC   |                          |         |         |                      |        |         |             | С  |        |    |
|                      |   | 48 V DC   |                          |         |         |                      |        |         |             | D  |        |    |
|                      |   | 60 V DC   |                          |         |         |                      |        |         |             | Е  |        |    |
|                      |   | 110 127 V AC 50/60 F  | Hz/110 12                | 5 V DC  |         |                      |        |         |             | F  |        |    |
|                      |   | 208 240 V AC 50/60 H  | lz/220 25                | 0 V DC  |         |                      |        |         |             | G  |        |    |
| 2nd auxiliary        | Without 2nd auxili                              | ary release   |                          |         |         |                      |        |         |             |    | Α      |    |
| release              | With shunt trip (ST                             |   |                          | 24 V DC |         |                      |        |         |             |    | В      |    |
|                      |   |   |                          | 30 V DC |         |                      |        |         |             |    | С      |    |
|                      |   |   |                          | 48 V DC |         |                      |        |         |             |    | D      |    |
|                      |   |   |                          | 60 V DC |         |                      |        |         |             |    | Е      |    |
|                      |   |   |                          | 110 1   | 27 V AC | 50/60 Hz             | /110 1 | 25 V DC |             |    | F      |    |
|                      |   |   |                          | 208 2   | 40 V AC | 50/60 Hz             | /220 2 | 50 V DC |             |    | G      |    |
|                      | With undervoltage                               | release (UVR), instantane   | ous                      | 24 V DC |         |                      |        |         |             |    | J      |    |
|                      |   |   |                          | 30 V DC |         |                      |        |         |             |    | K      |    |
|                      |   |   |                          | 48 V DC |         |                      |        |         |             |    | L      |    |
|                      |   |   |                          | 60 V DC |         |                      |        |         |             |    | U      |    |
|                      |   |   |                          |         |         | 50/60 Hz             |        |         |             |    | M      |    |
|                      |   |   |                          |         |         | 50/60 Hz             |        | 50 V DC |             |    | N<br>P |    |
|                      | With undervoltage                               | rologgo (LIV/P +) 1)  |                          | 48 V DC |         | 50/60 Hz             |        |         |             |    | Q      |    |
|                      | delay 0.2 3.2 s                                 | release (OVK-I) 7,  |                          |         |         | 50/60 Hz             | /110 1 | 25 V DC |             |    | R      |    |
|                      | ,   |   |                          |         |         | 50/60 Hz             |        |         |             |    | S      |    |
|                      |   |   |                          |         |         | 50/60 Hz             |        | 30 V DC |             |    | T      |    |
| Auxiliary sv         | witches   |   |                          | 300     | 13 1716 | 30,00 112            |        |         |             |    |        |    |
| 1st auxiliary switch |   | 2 NO + 2 NC   |                          |         |         |                      |        |         |             |    |        | 2  |
| 1et . 2nd auvillant  | switch block                                    | 4 NO + 4 NC   |                          |         |         |                      |        |         |             |    |        |    |
| 1st + 2nd auxiliary  | SWITCH DIOCK                                    | 4 NO + 4 NC<br>6 NO + 2 NC  |                          |         |         |                      |        |         |             |    |        | 7  |
|                      |   | 5 NO + 3 NC   |                          |         |         |                      |        |         |             |    |        | 8  |
|                      |   | JINO + JINC   |                          |         |         |                      |        |         |             |    |        | ٥  |

<sup>1)</sup> The maximum allowable cable length to the actuator for quick shutdown is currently  $\leq$  50 m (maximum allowable cable length between the terminals  $\leq$  100 m).

## **Accessory options**

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

To specify the options, add "-Z" to the complete article number and indicate the Order code appropriate order code(s). 3WL....-....-Z Accessories for basic configuration Rated operational voltage 1000 V AC and 690 V IT networks 4) • Only for circuit breakers of size 1–3 with high breaking capacity H and of size 3 breaking capacity C. Cannot be combined with rated operational voltage 1150 V AC, order code "A15". Size 1 1) ≤ 2000 A Size 2 1) 2) ≤ 4000 A Size 3 1) A05 < 6300 A Rated operational voltage 1150 V AC • Only for circuit breakers with high breaking capacity H (8th digit of the article number is a "4"). Cannot be combined with rated operational voltage 1000 V AC, order code "A05". Size 2 1) 2) ≤ 4000 A Size 3 1) 3) < 6300 A Rated operational voltage 690 V AC (+ 20%) 4) • Only for 3WL11 circuit breakers, size 1 4), with high breaking capacity H (8th digit of the article number is a "4"). ≤ 2000 A

When ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" only for withdrawable circuit breaker and guide

<sup>2)</sup> Not possible for circuit breakers with very high breaking capacity C.

<sup>3)</sup> Front connections are tinned as standard.

<sup>&</sup>lt;sup>4)</sup> When using withdrawable circuit breakers in conjunction with old guide frames (3WL92..-A..-... or 3WL92..-B..-...), additional Z option A41 must be ordered.

To specify the options, add "-Z" to the complete article number and indicate the Order code appropriate order code(s). 3WL....-....-Z Accessories for ETU electronic trip units Rating plugs Only one module is possible per circuit breaker (not in conjunction with ETU15B electronic trip unit). As standard, the electronic trip units are equipped with a rating plug which is equal to the maximum rated circuit breaker current (In max). The rated current of the selected rating plug must be less than  $I_{\rm n\ max}$  . B02 Sizes 1, 2 250 A 315 A 400 A **B04** 500 A B05 630 A 800 A B08 1000 A B10 Sizes 1, 2, 3 1250 A B12 1600 A B16 2000 A Sizes 2, 3 2500 A **B25** 3200 A B40 4000 A Size 3 5000 A 6300 A B63 Communication 1) Breaker status sensor (BSS) For determining the statuses ON/OFF/Tripped PROFIBUS DP communication port 2) Including COM15 and breaker status sensor (BSS) F02 Modbus RTU communication port 2) Including COM16 and breaker status sensor (BSS) F12 **PROFINET IO/Modbus TCP** Including COM35 and breaker status sensor (BSS) F35 communication port 23 Metering function (communications modules not included) 1) Metering function Plus With internal voltage tap on the lower main conducting paths 3) F36 With internal voltage tap on the upper main conducting paths 3) For combination with external voltage transformer F38 **EMC filter** • Common-mode interference suppressor filters (e.g. in converter applications) • Insertion loss (asymmetric) in the range 40 kHz to 10 MHz > 40 dB. **EMC** filter Overload and short-circuit protection for neutral conductors • Only possible with 4-pole circuit breaker with ETU27B to ETU76B Size 1 Internal current transformer for N conductor Size 2 F23 Size 3

frame separately, specify order code "F02", "F12" or "F35"

only for withdrawable circuit breaker.

1) The precondition is an ETU45B or ETU76B

3) Can only be used for rated operational voltages up to 690 V AC

## **Accessory options**

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

| appropriate order code(s).   | the complete article n  | umber and indicate the  |      | Order code   |
|--|---|---|------|--|
| appropriate order code(s).   |   |   | 3WLZ |  |
| Accessories for ETU ele  | ectronic trip un  | nits  |      |  |
| Remote resetting   |   |   |      |  |
| Automatic reset of the reclosing lockou  | ıt  |   |      | K01  |
| Remote reset for displays and reset but     Includes automatic reset of the reclosir   |   | eset of the reclosing lockout   |      |  |
| Remote trip alarm reset coils  | 24 V DC   |   |      | K10  |
|  | 48 V DC   |   |      | K11  |
|  | 110 127 V AC 50/6   | 50 Hz/110 125 V DC  |      | K12  |
|  | 208 240 V AC 50/6   | 50 Hz/220 250 V DC  |      | K13  |
| Connection Tinned version of the custo   | mer's connections   | s on the guide frame  |      |  |
| <ul><li>Only for withdrawable circuit breakers</li><li>The normal delivery time increases to 1</li></ul>   |   | n or flange connection  |      |  |
| Customer's connections 1) 2)   | Size 1  |   |      | A08  |
|  | Size 2  |   |      | A08  |
|  | Size 3  |   |      | A08  |
| Connection technology for  | main connections  | s (fixed-mounted version  | s)   |  |
| Top: <sup>3)</sup> horizontal  | Size 1  | ≤ 1600 A  |      | N11  |
| Bottom: accessible from front, single hole   | Size 2  | ≤ 3200 A  |      |  |
| g  | Size 3 <sup>4)</sup>  | ≤ 4000 A  |      | N11  |
| Ton: vortical  |   |   |      | N11<br>N11   |
| Top: vertical  | Size 1  | ≤ 2000 A  |      |  |
| Bottom: horizontal   | Size 1<br>Size 2  | ≤ 2000 A<br>≤ 3200 A  |      | N11  |
|  |   |   |      | N11<br>N20   |
| Bottom: horizontal  Top: horizontal  | Size 2  | ≤ 3200 A  |      | N11<br>N20<br>N20                                    |
| Bottom: horizontal   | Size 2<br>Size 3  | ≤ 3200 A<br>≤ 5000 A  |      | N11<br>N20<br>N20<br>N20                             |
| Bottom: horizontal  Top: horizontal  | Size 2<br>Size 3<br>Size 1  | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A  |      | N11<br>N20<br>N20<br>N20<br>N20                      |
| Bottom: horizontal  Top: horizontal  | Size 2 Size 3 Size 1 Size 2 Size 3  | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A  | ;)   | N11<br>N20<br>N20<br>N20<br>N20<br>N24               |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for Top and bottom: 5) 6)  | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1   | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions)<br>≤ 1600 A   | s)   | N11<br>N20<br>N20<br>N20<br>N20<br>N24               |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for  | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1 Size 2                                    | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions<br>≤ 1600 A<br>≤ 3200 A                                      | ;)   | N11<br>N20<br>N20<br>N20<br>N24<br>N24<br>N24<br>P00 |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for Top and bottom: 5) 6)  | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1   | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions)<br>≤ 1600 A   | ;)   | N11<br>N20<br>N20<br>N20<br>N24<br>N24<br>N24        |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for  Top and bottom: 5) 6) accessible from front, single hole  Top and bottom: 5)                                    | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1 Size 2 Size 3 Size 3                      | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions<br>≤ 1600 A<br>≤ 3200 A                                      | s)   | N11<br>N20<br>N20<br>N20<br>N24<br>N24<br>N24<br>P00 |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for  Top and bottom: <sup>5) 6)</sup> accessible from front, single hole   | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1 Size 2 Size 3                             | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions<br>≤ 1600 A<br>≤ 3200 A<br>≤ 4000 A                          | s)   | N11 N20 N20 N20 N24 N24 N24 P00 P00                  |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for  Top and bottom: 5) 6) accessible from front, single hole  Top and bottom: 5)                                    | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1 Size 2 Size 3 Size 3                      | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions)<br>≤ 1600 A<br>≤ 3200 A<br>≤ 4000 A<br>≤ 1600 A             | s)   | N11 N20 N20 N20 N24 N24 N24 P00 P00 P00 P01          |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for  Top and bottom: 5) 6) accessible from front, single hole  Top and bottom: 5) accessible from front, double hole | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1 Size 2 Size 3 Size 1 Size 2               | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions)<br>≤ 1600 A<br>≤ 3200 A<br>≤ 4000 A<br>≤ 1600 A<br>≤ 3200 A | ;)   | N11 N20 N20 N20 N24 N24 N24 P00 P00 P01 P01          |
| Bottom: horizontal  Top: horizontal Bottom: vertical  Connection technology for  Top and bottom: 5) 6) accessible from front, single hole  Top and bottom: 5) accessible from front, double hole | Size 2 Size 3 Size 1 Size 2 Size 3  main connections Size 1 Size 2 Size 3 Size 3 Size 1 Size 2 Size 3 | ≤ 3200 A<br>≤ 5000 A<br>≤ 2000 A<br>≤ 3200 A<br>≤ 5000 A<br>s (withdrawable versions)<br>≤ 1600 A<br>≤ 3200 A<br>≤ 4000 A<br>≤ 3200 A<br>≤ 4000 A | ;)   | N11 N20 N20 N20 N24 N24 N24 P00 P00 P00 P01 P01 P01  |

<sup>1)</sup> Front connections are tinned as standard.

The permissible temperature rise limits according to IEC 60947-2 are 5 K lower for a tin surface than

4) Not for size 3 with very high breaking capacity C. 2) The permissible temperature rise limits according for a silver surface.

<sup>3)</sup> Not for 3WL1 size 1 with high breaking capacity H and

Not for size 2, 3 circuit breakers with very high breaking capacity C.
 Not for 3WL1 size 1 with high breaking capacity H

| appropriate order code(s).                                     | e complete article number and  | indicate the 3WLZ   | Order code   |
|--|--|---|--|
| Connection   |  |   |  |
| Connection technology for m                                    | ain connections (withdra   | awable versions)  |  |
| Top: vertical  | Size 1   | ≤ 2000 A  | P18  |
| Bottom: horizontal   | Size 2   | ≤ 3200 A  | P18  |
|  | Size 3   | ≤ 5000 A  | P18  |
| Top: 1) connecting flange                                      | Size 1   | ≤ 2000 A  | P19  |
| Bottom: horizontal   | Size 2   | ≤ 3200 A  | P19  |
|  | Size 3   | ≤ 4000 A  | P19  |
| Top: horizontal  | Size 1   | ≤ 2000 A  | P23  |
| Bottom: vertical   | Size 2   | ≤ 3200 A<br>≤ 3200 A  | P23  |
|  | Size 3   | ≤ 5000 A  | P23  |
| <b>-</b> 1)  |  |   |  |
| Top: 1) horizontal<br>Bottom: connecting flange                | Size 1   | ≤ 2000 A  | P28  |
| Detterm commercing names                                       | Size 2<br>Size 3   | ≤ 3200 A<br>≤ 4000 A  | P28<br>P28   |
|  |  | xed-mounted and withdrawable versions)  | Nea  |
| Connection technology for screwless terminals (tension spring) | Fixed-mounted Withdrawable   |   | N61<br>P61   |
| Operating mechanisms  Motorized operating mechanisms           | Only possible if the 13th digit of the article number = "1"  | 24 30 V DC<br>48 60 V DC  | M01<br>M03   |
|  |  | 110 127 V AC 50/60 Hz/110 125 V DC  |  |
|  |  | 200 240 V AC FO/CO II=/220 250 V DC   | M05  |
| Mechanical operating cycles counter, 5-di                      |  | 208 240 V AC 50/60 Hz/220 250 V DC  | M05<br>M06   |
| meenamen operating cycles counter, 5-ui                        | git <sup>2)</sup>  | 208 240 V AC 50/60 Hz/220 250 V DC  | M05  |
| Closing coils  | Suitable for uninterrupted   | 208 240 V AC 50/60 Hz/220 250 V DC  | M05<br>M06   |
|  | Suitable for uninterrupted<br>duty, 100% OP  | 24 V DC<br>30 V DC  | M05<br>M06<br>C01<br>M21<br>M22  |
|  | Suitable for uninterrupted   | 24 V DC<br>30 V DC<br>48 V DC   | M05<br>M06<br>C01<br>M21<br>M22<br>M23   |
|  | <ul> <li>Suitable for uninterrupted<br/>duty, 100% OP</li> <li>Only possible if the 13th digit</li> </ul>  | 24 V DC<br>30 V DC<br>48 V DC<br>60 V DC  | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24  |
|  | <ul> <li>Suitable for uninterrupted<br/>duty, 100% OP</li> <li>Only possible if the 13th digit</li> </ul>  | 24 V DC<br>30 V DC<br>48 V DC<br>60 V DC<br>110 127 V AC 50/60 Hz/110 125 V DC  | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25   |
|  | <ul> <li>Suitable for uninterrupted duty, 100% OP</li> <li>Only possible if the 13th digit of the article number = "1"</li> </ul>  | 24 V DC<br>30 V DC<br>48 V DC<br>60 V DC<br>110 127 V AC 50/60 Hz/110 125 V DC<br>208 240 V AC 50/60 Hz/220 250 V DC  | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26                                    |
|  | Suitable for uninterrupted duty, 100% OP     Only possible if the 13th digit of the article number = "1"      Not suitable for uninterrupted   | 24 V DC<br>30 V DC<br>48 V DC<br>60 V DC<br>110 127 V AC 50/60 Hz/110 125 V DC<br>208 240 V AC 50/60 Hz/220 250 V DC<br>24 V DC   | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31                             |
|  | <ul> <li>Suitable for uninterrupted duty, 100% OP</li> <li>Only possible if the 13th digit of the article number = "1"</li> </ul>  | 24 V DC<br>30 V DC<br>48 V DC<br>60 V DC<br>110 127 V AC 50/60 Hz/110 125 V DC<br>208 240 V AC 50/60 Hz/220 250 V DC<br>24 V DC<br>48 V DC  | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31                             |
|  | Suitable for uninterrupted duty, 100% OP     Only possible if the 13th digit of the article number = "1"      Not suitable for uninterrupted duty, 5% OP, synchronizable <sup>3)</sup>   | 24 V DC 30 V DC 48 V DC 60 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC 24 V DC 48 V DC 110 127 V AC 50/60 Hz/110 125 V DC  | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31<br>M33                      |
| Closing coils  | Suitable for uninterrupted duty, 100% OP     Only possible if the 13th digit of the article number = "1"      Not suitable for uninterrupted duty, 5% OP, synchronizable <sup>3)</sup> Only possible if the 13th digit of the article number = "1"                                 | 24 V DC 30 V DC 48 V DC 60 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC 24 V DC 48 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC   | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31<br>M33<br>M35               |
|  | Suitable for uninterrupted duty, 100% OP     Only possible if the 13th digit of the article number = "1"      Not suitable for uninterrupted duty, 5% OP, synchronizable <sup>3)</sup> Only possible if the 13th digit of the article number = "1"  Not suitable for uninterrupted | 24 V DC 30 V DC 48 V DC 60 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC 24 V DC 48 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC      | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31<br>M33<br>M35<br>M36<br>M41 |
| Closing coils  | Suitable for uninterrupted duty, 100% OP     Only possible if the 13th digit of the article number = "1"      Not suitable for uninterrupted duty, 5% OP, synchronizable <sup>3)</sup> Only possible if the 13th digit of the article number = "1"                                 | 24 V DC 30 V DC 48 V DC 60 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC 24 V DC 48 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC 24 V DC 48 V DC 24 V DC 48 V DC 48 V DC | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31<br>M33<br>M35<br>M36<br>M41 |
| Closing coils  | Suitable for uninterrupted duty, 100% OP     Only possible if the 13th digit of the article number = "1"      Not suitable for uninterrupted duty, 5% OP, synchronizable <sup>3)</sup> Only possible if the 13th digit of the article number = "1"  Not suitable for uninterrupted | 24 V DC 30 V DC 48 V DC 60 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC 24 V DC 48 V DC 110 127 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/110 125 V DC 208 240 V AC 50/60 Hz/220 250 V DC      | M05<br>M06<br>C01<br>M21<br>M22<br>M23<br>M24<br>M25<br>M26<br>M31<br>M33<br>M35<br>M36        |

<sup>1)</sup> Not for size 2, 3 circuit breakers with very high breaking capacity C.

Only possible with motorized operating mechanism.
 Overexcited, i.e. switching time 50 ms (standard > 80 ms).

<sup>&</sup>lt;sup>4)</sup> Only possible if the 14th digit of the article number for the circuit breaker is "A", i.e. "without 1st auxiliary release".

## **Accessory options**

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

| Position signaling switches for guide frames    1 CO   1 CO   1 CO   (connected   test   disconnected position)   3 CO   2 CO   1 CO   (connected   test   disconnected position)   3 CO   2 CO   1 CO   (connected   test   disconnected position)   3 CO   2 CO   1 CO   (connected   test   disconnected position)   5 CO   2 CO   5 CO  | To specify the options, add "-Z" to the appropriate order code(s).   | complete article number and indicate tl  | 3WLZ                              | Order code |
|--|--|--|-----------------------------------|------------|
| Connected   test   disconnected position   3 CO   2 CO   1 CO   Commerced   test   disconnected position   R16   | Auxiliary switches and sign  | gnaling switches   |                                   |            |
| Connected   test   disconnected position   | Position signaling switches for guide frame  | (connecte  | d   test   disconnected position) |            |
| Spring charge signaling switch (1) (\$221)   |  | •  | •                                 | R16        |
| For the first auxiliary release <sup>1)</sup> (S22) 1 CO C26 For the second auxiliary release <sup>1)</sup> (S23) 1 CO C27 Ist tripped signaling switch <sup>1)</sup> (S24) 1 CO K07 Author disped signaling switch <sup>1)</sup> (S25) 1 NO K06  Further accessories  Pushbuttons/disconnect switches/closing lockouts  EMERGENCY-OFF pushbuttons Mushroom pushbutton instead of the mechanical OFF pushbutton  Mushroom pushbutton instead of the mechanical OFF pushbutton  Uccal electric close on operator panel OFF pushbutton  This prevents unauthorized electrical closing from the operator panel. Mechanical dosing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)  Motor disconnect switch on operator panel of This prevents automatic charging of the stored energy mechanism by motorized operating mechanism  Special packaging for increased transport requirements (moisture protection)  Arc chute covers  Not available for:  - 1000 V version (order code "A05") DC version - 4000 A size 2 - 1150 V version (order code "A15") - 130 KA version, size 2 - 150 kA version, size 3  Arc chute covers  3-pole/4-pole  Shutters   | Signaling switches   | Ready-to-close signaling switch (S20)  | 1 NO                              | C22        |
| For the second auxiliary release 10 (\$23) 1 CO (\$27  | 1  | Spring charge signaling switch 1) (S21)  | 1 NO                              | C20        |
| 1st tripped signaling switch 13-20 (S24) 1 CO (MORE Purther accessories  Pushbuttons/disconnect switches/closing lockouts  EMERGENCY-OFF pushbuttons  Mushroom pushbutton instead of the mechanical OFF pushbutton (S10)  Local electric close on operator panel 19 (S10)  This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)  Motor disconnect switch on operator panel 10 (S12)  This prevents automatic charging of the stored energy mechanism by motorized operating mechanism by motorized operating mechanism by motorized operating mechanism or cardboard (moisture protection)  Arc chute covers  Not available for:  1000 V version (order code "A05"), DC version 4000 A size 2 1150 V version (order code "A15") 130 KA version, size 2 150 (V version (order code "A15") 130 KA version, size 3  Arc chute covers  3-pole/4-pole  R10  Shutters   |  | For the first auxiliary release 1) (S22)   | 1 CO                              | C26        |
| Pushbuttons/disconnect switches/closing lockouts  EMERGENCY-OFF pushbuttons  Mushroom pushbutton instead of the mechanical OFF pushbutton  Local electric close on operator panel 10 This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing termain possible. Possible only for circuit breakers with closing coil (CC)  Motor disconnect switch on operator panel 40 This prevents automatic charging of the stored energy mechanism by motorized operating mechanism  Special packaging for increased transport requirements (moisture protection)  Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)  Arc chute covers  Not available for:  1000 Version (order code "A05"),  D C version  4000 A size 2  1150 V version (order code "A15")  130 KA version, size 2  150 Al version, size 3  Arc chute covers  3-pole/4-pole  R10  Shutters  |  | For the second auxiliary release 1) (S23)  | 1 CO                              | C27        |
| Further accessories  Pushbuttons/disconnect switches/closing lockouts  EMERGENCY-OFF pushbuttons  Mushroom pushbutton instead of the mechanical OFF pushbutton OFF pushbutton instead of the mechanical OFF pushbutton (S10)  This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)  Motor disconnect switch on operator panel of This prevents automatic charging of the stored energy mechanism by motorized operating mechanism  Special packaging for increased transport requirements (moisture protection)  Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)  Arc chute covers  Not available for: - 1000 V version (order code "A05"), - D C version - 4000 A size 2 - 1150 V version (order code "A15") - 130 kA version, size 2 - 150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10  Shutters  |  | 1st tripped signaling switch 1) 2) (S24)   | 1 CO                              | K07        |
| Pushbuttons/disconnect switches/closing lockouts  EMERGENCY-OFF pushbutton  Mushroom pushbutton instead of the mechanical OFF pushbutton  Local electric close on operator panel 'Depath by the closing and remote closing promagnet personal |  | 2nd tripped signaling switch 1) 2) 3) (S25)  | 1 NO                              | K06        |
| Coff pushbutton  Local electric close on operator panel 1) (S10)  This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)  Motor disconnect switch on operator panel 4) (S12)  This prevents automatic charging of the stored energy mechanism by motorized operating mechanism  Special packaging for increased transport requirements (moisture protection)  Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)  Arc chute covers  Not available for: 1000 V version (order code "A05"), DC version 4000 A size 2 1150 V version (order code "A15") 130 kA version, size 2 150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10  Shutters  |  | nes/closing lockouts   |                                   |            |
| the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)  Motor disconnect switch on operator panel This prevents automatic charging of the stored energy mechanism by motorized operating mechanism  Special packaging for increased transport requirements (moisture protection)  Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)  Arc chute covers  Not available for:  1000 V version (order code "A05"), DC version  4000 A size 2  1150 V version (order code "A15")  130 kA version, size 2  150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10  Shutters  | EMERGENCY-OFF pushbuttons  | •  | ical                              | S24        |
| (S12) energy mechanism  Special packaging for increased transport requirements (moisture protection)  Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)  Arc chute covers  • Not available for:  - 1000 V version (order code "A05"),  - DC version - 4000 A size 2  - 1150 V version (order code "A15")  - 130 kA version, size 2  - 150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10  |  | the operator panel. Mechanical closing and recoloring remain possible. Possible only for circu | mote With CES lock                |            |
| Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)  Arc chute covers  Not available for:  1000 V version (order code "A05"),  DC version  4000 A size 2  1150 V version (order code "A15")  130 kA version, size 2  150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10   |  | energy mechanism by motorized operating  | I                                 | S25        |
| Arc chute covers  • Not available for:  - 1000 V version (order code "A05"),  - DC version  - 4000 A size 2  - 1150 V version (order code "A15")  - 130 kA version, size 2  - 150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10   | Special packaging for increase   | d transport requirements (mois   | ture protection)                  |            |
| Not available for:  - 1000 V version (order code "A05"),  - DC version  - 4000 A size 2  - 1150 V version (order code "A15")  - 130 kA version, size 2  - 150 kA version, size 3  Arc chute covers  3-pole/4-pole  R10  Shutters   | Cardboard packaging with water-repellent   | coating on corrugated cardboard (moisture p  | rotection)                        | A61        |
| Shutters   | <ul> <li>Not available for:</li> <li>1000 V version (order code "A05"),</li> <li>DC version</li> <li>4000 A size 2</li> <li>1150 V version (order code "A15")</li> <li>130 kA version, size 2</li> </ul> |  |                                   |            |
|  | Arc chute covers   | 3-pole/4-pole  |                                   | R10        |
| Shutter: 2-part, lockable, with padlocks 5) 3-pole/4-pole R21  | Shutters   |  |                                   |            |
|  | Shutter: 2-part, lockable, with padlocks 5)  | 3-pole/4-pole  |                                   | R21        |

Not possible with "communications interface" option, order code "F02", "F12" or "F35".
 Not available for non-automatic air circuit

breakers.

<sup>&</sup>lt;sup>3)</sup> Only possible with option "K07".

Only for breakers with motorized operating mechanism, not possible with order codes "C11", "C12".

<sup>&</sup>lt;sup>5)</sup> Padlock not included in the scope of supply.

To specify the options, add "-Z" to the complete article number and indicate the Order code appropriate order code(s). 3WL....-....-.... -Z Further accessories Instrument transformers (without energy transformers), for powering the ETU • Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B External 24 V DC supply required Instantaneous undervoltage release UVR required (15th position in article number: J, K, L, U, M, N, P)
 Not possible with delayed undervoltage release UVR-t (15th position in article number: Q, R, S, T) • Comprises: - 3 (3-pole) or 4 (4-pole) transformers - 24 V DC relay Warning signs – Manual Transformer 3-pole/4-pole Sizes 2, 3 Operating instructions in printed form · As of June 1, 2023, 3WL circuit breakers and non-automatic circuit breakers are no longer supplied with operating instructions as standard. However, they can be supplied together with the circuit breaker for an additional charge. Article numbers for separate ordering of operating instructions can be found in chapter "Accessories and spare parts" 3WL operating instructions German/English A80 3WL operating instructions Italian/French 3WL operating instructions Spanish/Portuguese A82

## **Accessory options**

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

|  | Z" to the complete article number an                                    | d indicate the   | Order code |
|--|---|--|------------|
| appropriate order code(s).                               |   | 3WLZ   |            |
| Interlocking   |   |  |            |
| menocking  |   |  |            |
| Mechanical interlocking • Interlocking module with Bowde |   |  |            |
| Mechanical interlocks                                    |   | For fixed-mounted breakers                             | S55        |
|  |   | For withdrawable circuit breakers with guide frame 1)  | R55        |
|  |   | For guide frames (ordered separately)                  | R56        |
|  |   | For withdrawable circuit breakers (ordered separately) | R57        |
| _ ·  | fixed-mounted and withdraw requirements for main circuit breakers accor |  |            |
| Locking provisions                                       | Against unauthorized closing  | Made by CES  | S01        |
|  | from the operator panel   | Made by IKON   | S03        |
|  |   | Assembly kit FORTRESS or CASTELL 2)                    | S05        |
|  |   | Assembly kit for padlocks 3)                           | S07        |
|  |   | Made by RONIS  | S08        |
|  |   | Made by PROFALUX                                       | S09        |
| Locking provisions (for                                  | fixed-mounted and withdraw  | able versions)   |            |
| Locking provisions                                       | For charging handle with padloc   | k <sup>3)</sup>  | S33        |

<sup>1)</sup> Not available in combination with R40.

<sup>Not available in combination with 14-5.

Locks must be ordered from the manufacturer.

Padlock not included in the scope of supply.</sup> 

|   | the complete article number and  | d indicate the 3WLZ  | Order code        |  |  |   |
|---|--|--|-------------------|--|--|---|
| Interlocking  Locking provisions (for with  The disconnector unit fulfills the require active in the connected position, functi  Not possible in combination with order | ements for main circuit breakers acc. to<br>on is retained when circuit breaker is r             | o EN 60204-1, consisting of a lock in the guide frame,<br>replaced.                      |                   |  |  |   |
| Locking provisions  | Against unauthorized closing from the operator panel   | Made by CES  Made by RONIS  Made by PROFALUX   | R61<br>R68<br>R60 |  |  |   |
| Locking provisions (for with  • Safety lock for mounting onto the circu   |  |  |                   |  |  |   |
| Locking provisions  | To prevent movement of the withdrawable circuit breaker  | Made by CES  | S71               |  |  |   |
|   | withdrawable clicuit breaker   | Made by PROFALUX  Made by RONIS  | S75<br>S76        |  |  |   |
| Locking mechanisms  Not possible in combination with order  | code "R81", "R85" or "R86".  |  |                   |  |  |   |
| For fixed-mounted circuit breakers  | rcuit breakers To prevent opening of the cabinet door in ON position                             |  |                   |  |  |   |
| For withdrawable circuit breakers  To prevent opening of the cabinet door in connected position  To prevent activation when the cabinet door is open 1)                 |  |  |                   |  |  |   |
|   |  |  |                   |  |  | Locking mechanisms to previous disconnected position  Consisting of Bowden cable and lock in Not possible in combination with order |
| Made by CES   |  |  |                   |  |  |   |
| Made by CES   |  |  | R81               |  |  |   |
| Made by PROFALUX  |  |  | R81<br>R85        |  |  |   |
| · · · · · · · · · · · · · · · · · · ·   |  |  |                   |  |  |   |
| Made by PROFALUX<br>Made by RONIS   | tion IP41  |  | R85               |  |  |   |
| Made by PROFALUX Made by RONIS  Seals  Door sealing frame for degree of protect  Accessories from curre  Use of the withdrawable cir                                    | nt catalog  cuit breaker in combinati or withdrawable circuit breakers 3WL1 "older" guide frames | ion with an older guide frame<br>for use in combination with older guide frames supplied | R85<br>R86        |  |  |   |

### **Accessory options**

### Further technical specifications

#### Manual operating mechanism

3WL11 - 3WL13

| Switching on/charging energy store               |         |
|--|---------|
| Maximum force required to operate the hand lever | ≤ 230 N |
| Required number of strokes on the hand lever     | 9       |

#### **Closing coils**

#### Note

The closing coils (CC) and shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA see page 1/52

Please note: The communication-capable closing coils (CC-COM) can be used only in conjunction with 3WA.

#### Motor

#### Note:

The motor operators are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA see page 1/52

#### Signals of the electronic trip unit

3WL11 - 3WL13

Signals of the electronic trip unit

Measuring accuracy of the electronic trip unit

Protective functions acc. to EN 60947; current indication  $\leq$  10%; metering function for base quantities  $\leq$  1%; metering function for derived quantities  $\leq$  4%

#### Undervoltage releases UVR (F3) and UVR-t (F4)

#### Note:

The undervoltage releases (UVR/UVR-t) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA see page 1/53

#### Shunt trip (ST) (F1, F2)

#### Note

The shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA see page 1/54

Please note: The communication-capable shunt trips (ST-COM) can be used only in conjunction with 3WA.

#### Remote trip alarm reset coil for mechanical tripped indicator (F7)

#### Note:

The remote trip alarm reset coils are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA see page 1/54

#### Contact position-driven auxiliary switches (S1, S2, S3, S4, S7, S8)

#### Note:

The switch position dependent auxiliary switches are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA see page 1/54

# Ready-to-close signaling switches (S20)(acc. to DIN VDE 0630)3WL11 – 3WL13Breaking capacityAlternating current 50/60 HzRated operational voltage $U_e$ 250 VRated operational current $I_e$ 8 ADirect currentRated operational voltage $U_e$ 125 V250 VRated operational current $I_e$ 0.4 A0.2 A

From 1 mA at 5 V DC

Until manual or electrical remote reset (option)

Contact reliability

Signal duration after tripping

#### Tripped signaling switches (S24) and signaling switches for auxiliary releases (S22, S23) (acc. to DIN VDE 0630) 3WL11 - 3WL13 Alternating current 50/60 Hz 250 V Rated operational voltage $U_e$ Rated operational current $I_e/AC-12$ 8 A Rated operational voltage U<sub>e</sub> 24 V 125 V 250 V Direct current Rated operational current $I_e/DC-12$ 0.2 A 0.4 A 6 A Contact reliability From 1 mA at 5 V DC Tripped signaling switches

| Position signaling switch on guide            | frame                                      | 3WL11 – 3WL13   |                       |     |  |  |  |
|---|--|---|-----------------------|-----|--|--|--|
| Type of contacts                              |  |   |                       |     |  |  |  |
| Message                                       | "Circuit breaker in connected position"    | 3 W   | or                    | 1 W |  |  |  |
|   | "Circuit breaker in test position"         | 2 W   | or                    | 1 W |  |  |  |
|   | "Circuit breaker in disconnected position" | 1 W   | or                    | 1 W |  |  |  |
| Contact reliability                           |  | From 1 mA at 5 V DC                                       |                       |     |  |  |  |
| Rated operational voltage                     |  |   |                       |     |  |  |  |
| Rated insulation voltage $U_{\rm i}$          | 50/60 Hz AC                                | 440 V   |                       |     |  |  |  |
|   | DC   | 250 V   |                       |     |  |  |  |
| Rated operational voltage $U_{\rm e}$         |  | 250 V   |                       |     |  |  |  |
| Rated impulse withstand voltage $U_{\rm imp}$ |  | 4 kV  |                       |     |  |  |  |
| Breaking capacity                             |  |   |                       |     |  |  |  |
| Rated operational current $I_{\rm e}$         | I <sub>e</sub> /AC-12                      | 24 V 10 A, 110/127 V 10 A, 220/240 V 10 A, 320/440 V 10 A |                       |     |  |  |  |
|   | I <sub>e</sub> /AC-15                      | 220/240 V 4 A, 320  | )/440 V 3 A,          |     |  |  |  |
|   | I <sub>e</sub> /DC-12                      | 24 V 10 A, 48 V 2.5                                       | 6 A, 220/240 V 0.2 A, |     |  |  |  |
|   | I <sub>e</sub> /DC-13                      | 24 V 3.0 A, 220/240 V 0.1 A                               |                       |     |  |  |  |
|   | A300 AC                                    | 120 V 6 A, 240 V 3 A                                      |                       |     |  |  |  |
|   | R300 DC                                    | 125 V 0.22 A, 250 V 0.11 A                                |                       |     |  |  |  |

### Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your guide frame, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

|   |                      | 3WL      | 9           | 5             |                        | 6 7<br>1 | 8      | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|---|----------------------|----------|-------------|---------------|------------------------|----------|--------|---|----|----|----|----|----|----|----|
| Size (SZ)                                     | 1                    |          |             |               |                        | 1        |        |   |    |    |    |    |    |    |    |
|   | 3                    |          |             |               |                        | 3        |        |   |    |    |    |    |    |    |    |
|   |                      |          | SZ 1        | SZ 2          | SZ 3                   |          |        |   |    |    |    |    |    |    |    |
| Max. rated                                    | 1000 A 5) 6)         |          | •           | _             | -                      |          | 1      |   |    |    |    |    |    |    |    |
| current I <sub>n max</sub>                    | 1600 A 5) 6)         |          | •           | _             | -                      |          | 2      |   |    |    |    |    |    |    |    |
| (guide frames)                                | 2000 A 6)            |          | •           | •             | _                      |          | 3      |   |    |    |    |    |    |    |    |
|   | 2500 A 6)            |          | -           | •             | -                      |          | 4      |   |    |    |    |    |    |    |    |
|   | 3200 A <sup>7)</sup> |          | -           |               | -                      |          | 5      |   |    |    |    |    |    |    |    |
|   | 4000 A <sup>6)</sup> |          | -           | -             | -                      |          | 6<br>7 |   |    |    |    |    |    |    |    |
|   | 6300 A               |          | -           | _             |                        |          | 8      |   |    |    |    |    |    |    |    |
|   | 030071               |          |             |               |                        |          |        |   |    |    |    |    |    |    |    |
| Number of poles                               | 3-pole               |          |             |               |                        |          |        | F |    |    |    |    |    |    |    |
| ·   | 4-pole               |          |             |               |                        |          |        | G |    |    |    |    |    |    |    |
|   |                      |          |             |               |                        |          |        |   |    |    |    |    |    |    |    |
| Main connection                               | Front, single        | e hole   | <b>■</b> 1) | <b>2</b> ) 6) | ■3)                    |          |        |   | Α  |    |    |    |    |    |    |
|   | Front, doub          | le hole  |             | <b>2</b> ) 6) | ■3)                    |          |        |   | В  |    |    |    |    |    |    |
|   | Horizontal           |          |             | <b>2</b> )    | <b>■</b> <sup>4)</sup> |          |        |   | С  |    |    |    |    |    |    |
|   | Vertical             |          |             |               |                        |          |        |   | D  |    |    |    |    |    |    |
|   | Connecting           | flange   |             | <b>2</b> ) 6) | ■3)                    |          |        |   | Е  |    |    |    |    |    |    |
|   |                      |          |             |               |                        |          |        |   |    |    |    |    |    |    |    |
| Short-circuit                                 | N                    | 55 kA    | •           | -             | -                      |          |        |   |    |    |    |    |    | N  |    |
| breaking capacity<br>I <sub>cu</sub> at 500 V | S                    | 66 kA    | -           | -             | -                      |          |        |   |    |    |    |    |    | S  |    |
| r <sub>cu</sub> at 500 V                      | Н                    | 85 kA    | <b>■</b> 5) | -             | -                      |          |        |   |    |    |    |    |    | Н  |    |
|   | N, S and H           | ≤ 100 kA | -           |               | •                      |          |        |   |    |    |    |    |    | Н  |    |
|   | С                    | 130 kA   | -           | •             | -                      |          |        |   |    |    |    |    |    | С  |    |
|   | С                    | 150 kA   | -           | -             | •                      |          |        |   |    |    |    |    |    | С  |    |

Not available for rated circuit breaker current 2000 A and breaking capacity H

### **Options**

| •  |                                   |            |        |         |         |   |    |     |    |         |    |    |    |
|--|-----------------------------------|------------|--------|---------|---------|---|----|-----|----|---------|----|----|----|
|  | 3WL9                              | 2          | 6<br>1 | 7       | 8       | 9 | 10 | 11  | 12 | 13<br>- | 14 | 15 | 16 |
| Number of auxiliany                      | Without                           |            |        |         |         |   |    |     |    |         |    |    |    |
| Number of auxiliary<br>supply connectors |                                   |            |        |         |         |   |    | - 0 |    |         |    |    |    |
| supply confilectors                      | 1 connector                       |            |        |         |         |   |    |     |    |         |    |    |    |
|  | 2 connectors                      |            |        |         |         |   |    | 2   |    |         |    |    |    |
|  | 3 connectors                      |            |        |         |         |   |    | 3   |    |         |    |    |    |
|  | 4 connectors                      |            |        |         |         |   |    | 4   |    |         |    |    |    |
|  |                                   |            |        |         |         |   |    |     |    |         |    |    |    |
| Type of auxiliary                        | Without 8)                        |            |        |         |         |   |    |     | 0  |         |    |    |    |
| circuit connections                      | With screw terminals (SIGUT, sta  | andard)    |        |         |         |   |    |     | 1  |         |    |    |    |
|  | With screwless terminals (tension | n spring   | )      |         |         |   |    |     | 2  |         |    |    |    |
| Position signaling                       | Without                           |            |        |         |         |   |    |     |    | 0       |    |    |    |
| switch                                   |                                   |            |        |         | \       |   |    |     |    | 1       |    |    |    |
| SWILCH                                   | 1 CO   1 CO   1 CO (connected     |            |        |         |         |   |    |     |    |         |    |    |    |
|  | 3 CO   2 CO   1 CO (connected     | test   dis | connec | ted pos | sition) |   |    |     |    | 2       |    |    |    |
| Shutters                                 | Without                           |            |        |         |         |   |    |     |    |         | Α  |    |    |
|  | With shutter, 2-part, lockable    |            |        |         |         |   |    |     |    |         | В  |    |    |
|  |                                   |            |        |         |         |   |    |     |    |         |    |    |    |

<sup>8)</sup> Can only be selected if the number of auxiliary supply connectors is zero.

<sup>2)</sup> Not available for rated circuit breaker current 4000 A of the guide frame
3) Not available for rated circuit breaker current 5000 A + 6300 A + breaking capacity C
4) Not available for rated circuit breaker current 6300 A

7) For all rated circuit breaker currents under the guide frame of the gu

<sup>&</sup>lt;sup>5)</sup> For size 1 with breaking capacity H, please select the max. rated current  $I_n$  2000 A

For all rated circuit breaker currents up to 3200 A with breaking capacity C

### Guide frames for DC

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your guide frame, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

|                                |  |  |   |  |  |  |  |   | 0   | 1  |
|--------------------------------|--|--|---|--|--|--|--|---|---|--|
| 000 A<br>000 A                 |  | 3 6  |   |  |  |  |  |   |   |  |
| pole<br>pole                   |  |  | Н   |  |  |  |  |   |   |  |
| ont, single hole <sup>1)</sup> |  |  |   | A  |  |  |  |   |   |  |
| orizontal<br>ertical           |  |  |   | C<br>D   |  |  |  |   |   |  |
|                                | oole cont, single hole <sup>1)</sup> cont, double hole <sup>1)</sup> crizontal | oole coole cont, single hole <sup>1)</sup> cont, double hole <sup>1)</sup> crizontal | ont, single hole <sup>1)</sup> ont, double hole <sup>1)</sup> orizontal | oole  oole  ont, single hole¹¹  ont, double hole¹¹  rizontal  rtical | ond 6  pole H  pole J  ont, single hole¹¹  ont, double hole¹¹  orizontal C  rtical D | oole H J J A A A A A A A A A A A A A A A A A | oole H J A A A A A A A A A A A A A A A A A A | oole Hoole J ont, single hole¹) ont, double hole¹) orizontal C rtical D | oole Hoole J ont, single hole¹) ont, double hole¹) orizontal C rtical D | oole H J J A A A A A A A A A A A A A A A A A |

<sup>1)</sup> Not available for rated circuit breaker current 4000 A

### **Options**

|                     | 3WL9                              | 2           | 6      | 7      | <b>8</b> | 9 | 10 | 11 | 12 | 13 | 14 | 0 | 16 |
|---------------------|-----------------------------------|-------------|--------|--------|----------|---|----|----|----|----|----|---|----|
|                     |                                   |             |        |        |          |   |    |    |    |    |    |   |    |
| Number of auxiliary | Without                           |             |        |        |          |   |    | 0  |    |    |    |   |    |
| supply connectors   | 1 connector                       |             |        |        |          |   |    | 1  |    |    |    |   |    |
|                     | 2 connectors                      |             |        |        |          |   |    | 2  |    |    |    |   |    |
|                     | 3 connectors                      |             |        |        |          |   |    | 3  |    |    |    |   |    |
|                     | 4 connectors                      |             |        |        |          |   |    | 4  |    |    |    |   |    |
|                     |                                   |             |        |        |          |   |    |    |    |    |    |   |    |
| Type of auxiliary   | Without 2)                        |             |        |        |          |   |    |    | 0  |    |    |   |    |
| circuit connections | With screw terminals (SIGUT, st   | andard)     |        |        |          |   |    |    | 1  |    |    |   |    |
|                     | With screwless terminals (tension | on spring   | )      |        |          |   |    |    | 2  |    |    |   |    |
| s 1.1 1 11          | and a                             |             |        |        |          |   |    |    |    |    |    |   |    |
| Position signaling  | Without                           |             |        |        |          |   |    |    |    | 0  |    |   |    |
| switch              | 1 CO   1 CO   1 CO (connected     | test   disc | connec | ted po | sition)  |   |    |    |    | 1  |    |   |    |
|                     | 3 CO   2 CO   1 CO (connected     | test   dis  | connec | ted po | sition)  |   |    |    |    | 2  |    |   |    |
| Shutters            | Without                           |             |        |        |          |   |    |    |    |    |    |   |    |
| Silutters           |                                   |             |        |        |          |   |    |    |    |    | A  |   |    |
|                     | With shutter, 2-part, lockable    |             |        |        |          |   |    |    |    |    | В  |   |    |

<sup>&</sup>lt;sup>2)</sup>Can only be selected if the number of auxiliary supply connectors is zero.

#### Accessories for ETU electronic trip units

#### Electronic trip units and optional metering function



- For replacement in existing circuit breakers, please specify the circuit breaker ID No. when ordering.
- The electronic trip unit is supplied without a rating plug
- The rating plug must be ordered separately

| Туре                     | With protective function | Metering function           | Article No.         |
|--------------------------|--------------------------|-----------------------------|---------------------|
| ETU15B                   | Ц                        | Without                     | 3WL9311-5AA00-0AA2  |
| ETU25B                   | LSI                      | Without                     | 3WL9312-5AA00-0AA2  |
| ETU27B                   | LSING                    | Without                     | 3WL9312-7AA00-0AA2  |
| ETU45B (without display) | LSIN(G)                  | Without                     | 3WL9314-5AA00-0AA2  |
|                          |                          | With metering function Plus | 3WL9314-5AA30-0AA2  |
| ETU76B                   | LSIN(G)                  | Without                     | 3WL9317-6AA00-0AA2  |
|                          |                          | With metering function Plus | 3WI 9317-6AA30-0AA2 |

#### Rating plugs



With the rating plug selected, the maximum rated current I<sub>n max</sub>
 of the circuit breaker must not be exceeded. The following applies: I < I</li>

| of the circuit bleaker must not |                              |                    |
|---------------------------------|------------------------------|--------------------|
| Size                            | Rated current I <sub>n</sub> | Article No.        |
| 1, 2                            | 250 A                        | 3WL9111-0AA51-0AA0 |
|                                 | 315 A                        | 3WL9111-0AA52-0AA0 |
|                                 | 400 A                        | 3WL9111-0AA53-0AA0 |
|                                 | 500 A                        | 3WL9111-0AA54-0AA0 |
|                                 | 630 A                        | 3WL9111-0AA55-0AA0 |
|                                 | 800 A                        | 3WL9111-0AA56-0AA0 |
|                                 | 1000 A                       | 3WL9111-0AA57-0AA0 |
| 1, 2, 3                         | 1250 A                       | 3WL9111-0AA58-0AA0 |
|                                 | 1600 A                       | 3WL9111-0AA61-0AA0 |
|                                 | 2000 A                       | 3WL9111-0AA62-0AA0 |
| 2, 3                            | 2500 A                       | 3WL9111-0AA63-0AA0 |
|                                 | 3200 A                       | 3WL9111-0AA64-0AA0 |
|                                 | 4000 A                       | 3WL9111-0AA65-0AA0 |
| 3                               | 5000 A                       | 3WL9111-0AA66-0AA0 |
|                                 | 6300 A                       | 3WL9111-0AA67-0AA0 |

#### Ground-fault modules



- · Alarm and tripping
- For direct metering of the ground-fault current, e.g. in the neutral point of the transformer,
  a 1200 A/1 A current transformer, class 1, is required. The internal load of the 3WL circuit breaker
  is 0.11 IM. If the ground-fault current is to be determined using the vectorial sum of the phases,
  a transformer must be installed in the neutral conductor.

| Type             | Accessory for | Article No.        |  |  |  |  |
|------------------|---------------|--------------------|--|--|--|--|
| GFM AT 45B       | ETU45B        | 3WL9111-0AT53-0AA0 |  |  |  |  |
| GFM AT 55B – 76B | ETU76B        | 3WL9111-0AT56-0AA0 |  |  |  |  |

#### Display



 Accessory for
 Version
 Article No.

 ETU45B
 4-line
 3WL9111-0AT81-0AA0

#### Internal current transformers, for N conductor including wiring kit

| ETU Release 2 | Size | Article No.        |
|---------------|------|--------------------|
| -             | 1    | 3WL9111-0AA11-0AA0 |
|               | 2    | 3WL9111-0AA12-0AA0 |
|               | 3    | 3WL9111-0AA13-0AA0 |
| ✓             | 1    | 3WL9111-0AA14-0AA0 |
|               | 2    | 3WL9111-0AA15-0AA0 |
|               | 3    | 3WL9111-0AA16-0AA0 |

#### External current transformers for N conducto





| rı | mers for N conductor     |      |                    |  |  |  |  |  |  |  |  |
|----|--------------------------|------|--------------------|--|--|--|--|--|--|--|--|
|    | Copper connection pieces | Size | Article No.        |  |  |  |  |  |  |  |  |
|    | -                        | 1    | 3WL9111-0AA21-0AA0 |  |  |  |  |  |  |  |  |
|    |                          | 2    | 3WL9111-0AA22-0AA0 |  |  |  |  |  |  |  |  |
|    |                          | 3    | 3WL9111-0AA23-0AA0 |  |  |  |  |  |  |  |  |
|    | ✓                        | 1    | 3WL9111-0AA31-0AA0 |  |  |  |  |  |  |  |  |
|    |                          | 2    | 3WL9111-0AA32-0AA0 |  |  |  |  |  |  |  |  |
|    |                          | 3    | 3WL9111-0AA33-0AA0 |  |  |  |  |  |  |  |  |
|    |                          |      |                    |  |  |  |  |  |  |  |  |

#### Accessories for ETU electronic trip units

#### EMC filter Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters) Insertion loss (asymmetric) in the range 40 kHz to 10 MHz > 40 dB. Only for ETU Release 2 3WL9111-0AK34-0AA0 Sealable and lockable covers Accessory for Article No. ETU15B to ETU45B 3WL9111-0AT45-0AA0 ETU76 3WL9111-0AT46-0AA0 Automatic reset of the reclosing lockout Article No. Spare part for option K01 3WL9111-0AK21-0AA0 Remote trip alarm reset coils



#### Note

The remote trip alarm reset coils are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the article numbers of the remote trip alarm reset coils in section 3WA – Accessories and spare parts see page 1/63

| 2                             |   |                        |                       |                    |
|-------------------------------|---|------------------------|-----------------------|--------------------|
| Retrofittable internal wiring |   |                        |                       |                    |
|                               | Use   | Male connector         | Accessory for         | Article No.        |
|                               | Internal wiring of <b>Cubicle</b> BUS for connection to terminal X8 | Without male connector | ETU45B and ETU76B     | 3WL9111-0AK30-0AA0 |
|                               | For connection of the external N                                    | Without male connector | Not for ETU Release 2 | 3WL9111-0AK31-0AA0 |
|                               | and G transformers to terminal X8                                   |                        | ETU Release 2         | 3WL9111-0AK33-0AA0 |

#### Locking provisions and interlocks

Assembly kit for padlocks

| Interlocking sets for mechanical Open/Close                            |  |   |                    |  |
|--|--|---|--------------------|--|
| <b>5</b> 556   | Consisting of two transparent cover<br>(padlocks not included in scope of second to the cover with 6.35 mm hole (for tool as Lock mount for safety lock for key of the cover with 6.35 mm hole.) | actuation)  |                    |  |
|  | Version  |   | Article No.        |  |
|  | Without safety lock  |   | 3WL9111-0BA21-0AA0 |  |
| NSEO NSEO  | Made by CES  |   | 3WL9111-0BA22-0AA0 |  |
|  | Made by IKON   |   |                    |  |
| Locking provision against unauthorized closing from the operator panel |  |   |                    |  |
|  | <ul><li>The disconnector unit fulfills the red</li><li>Spare part for options S01 to S09</li></ul>   | quirements for main circuit breakers acc. to EN 60204-1 |                    |  |
|  | Туре   | Scope of supply   | Article No.        |  |
|  | Assembly kit FORTRESS or CASTELL   | Without locks, cylinders or keys                        | 3WL9111-0BA31-0AA0 |  |
| NS EO  | Made by RONIS  | Locks, cylinders and keys included                      | 3WL9111-0BA33-0AA0 |  |
|  | Made by KIRK-Key   | Without locks, cylinders or keys                        | 3WL9111-0BA34-0AA0 |  |
|  | Made by PROFALUX   | Locks, cylinders and keys included                      | 3WL9111-0BA35-0AA0 |  |
|  | Made by CES  | Locks, cylinders and keys included                      | 3WL9111-0BA36-0AA0 |  |
|  | Made by IKON   | Locks, cylinders and keys included                      | 3WL9111-0BA38-0AA0 |  |

Without padlock

3WL9111-0BA41-0AA0

#### Locking provisions and interlocks

#### Locking provision against unauthorized closing, for withdrawable circuit breakers



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

| Туре                | Scope of supply                    | Article No.        |
|---------------------|------------------------------------|--------------------|
| Made by CES         | Locks, cylinders and keys included | 3WL9111-0BA51-0AA0 |
| Made by IKON        | Locks, cylinders and keys included | 3WL9111-0BA53-0AA0 |
| Made by KIRK-Key 1) | Without locks, cylinders or keys   | 3WL9111-0BA57-0AA0 |
| Made by RONIS       | Locks, cylinders and keys included | 3WL9111-0BA58-0AA0 |
| Made by PROFALUX    | Locks, cylinders and keys included | 3WL9111-0BA50-0AA0 |

#### Locking provisions for charging handle with padlock



| Version                    | Scope of supply | Article No.        |
|----------------------------|-----------------|--------------------|
| Spare part for option \$33 | Without padlock | 3WL9111-0BA71-0AA0 |

#### Locking provision to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

| Туре                | Scope of supply                    | Article No.        |
|---------------------|------------------------------------|--------------------|
| Made by CES         | Locks, cylinders and keys included | 3WL9111-0BA73-0AA0 |
| Made by IKON        | Locks, cylinders and keys included | 3WL9111-0BA75-0AA0 |
| Made by PROFALUX    | Locks, cylinders and keys included | 3WL9111-0BA76-0AA0 |
| Made by RONIS       | Locks, cylinders and keys included | 3WL9111-0BA77-0AA0 |
| Made by KIRK-Key 1) | Without locks, cylinders or keys   | 3WL9111-0BA80-0AA0 |

#### Interlocking systems

- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

| Туре        | Article No.        |
|-------------|--------------------|
| Made by CES | 3WL9111-0BA43-0AA0 |

#### Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position



- Consisting of Bowden cable and lock in the cabinet door on the circuit breaker
- Spare part for option R81, R85, R86
- Note: Not possible in combination with "Locking mechanism to prevent opening of the cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the cabinet door open" (order code "R50")

| Туре             | Article No.         |
|------------------|---------------------|
| Made by CES      | 3WL9111-0BA81-0AA0  |
| Made by IKON     | 3WL9111-0BA83-0AA0  |
| Made by PROFALUX | 3WL9111-0BA85-0AA0  |
| Made by RONIS    | 3WI 9111-0RA86-0AA0 |

#### Locking mechanisms to prevent opening of the cabinet door in $\ensuremath{\mathsf{ON}}$ position



- Fixed-mounted
- Defeatable
- Note: Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

| Version                   | Article No.        |
|---------------------------|--------------------|
| Spare part for option S30 | 3WL9111-0BB12-0AA0 |

<sup>1)</sup> Locks, cylinders and keys must be ordered from the manufacturer.

3WL9111-0BB46-0AA0

3WL9111-0BB47-0AA0

#### Locking provisions and interlocks

#### Locking mechanisms to prevent opening of the cabinet door Guide frames Defeatable Note: Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86"). Article No. Spare part for option R30 3WL9111-0BB13-0AA0 Locking mechanisms to prevent movement with the cabinet door open Guide frames Note: Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86"). Article No. Spare part for option R50 3WL9111-0BB15-0AA0 Mechanical interlocks • With Bowden cable 2000 mm (one required for each circuit breaker) When ordered separately Article No. 3WL9111-0BB21-0AA0 Option S55 Fixed-mounted circuit breaker Module for withdrawable circuit Option R55 1) 3WL9111-0BB24-0AA0 breakers with guide frame Module for guide frame Option R56 3WL9111-0BB22-0AA0 Module for withdrawable circuit 3WL9111-0BB23-0AA0 Option R57 breaker Adapter for size 3 withdrawable 3WL9111-0BB30-0AA0 circuit breaker Couplings on the circuit breaker (with ring) for mutual interlocking · Can be used in all circuit breakers 3WL9112-8AH47-0AA0 Bowden cable Length 3WL9111-0BB45-0AA0 2000 mm

3000 mm

4500 mm

#### Test devices

| Manual tester, Release 2   | for ETU15B to ETU76B electronic trip units  |                    |
|--|---|--------------------|
|  | For testing the electronic trip unit functions of all 3WL ETUs (Release 1 and Release 2)  | _                  |
|  | ,   | Article No.        |
| With the same of t |   | 3WL9111-0AT32-0AA0 |
| Function test unit   |   |                    |
|  | <ul> <li>For testing the tripping characteristics for ETU15B to ETU76B electronic trip units<br/>(Release 1 and Release 2)</li> </ul> |                    |
|  |   | Article No.        |
|  |   | 3WL9111-0AT44-0AA0 |
| TD400 Kit IEC 1)   |   |                    |
|  | Commissioning/Service Tool for IEC 3WL (ETU Release 2) and 3VA  |                    |
|  | With adapter, cable and case  |                    |
|  | Not suitable for 3WL10 and 3VA27  |                    |
|  |   | Article No.        |
|  |   | 3VW9011-0AT40      |
| TD400 adapter (spare pa  | ert)  |                    |
|  | Version   | Article No.        |
|  | For 3VA   | 3VW9011-0AT43      |
|  | Only for 3WL ETU Release 1  | 3VW9011-0AT44      |
|  | Only for 3WL ETU Release 2  | 3VW9011-0AT45      |

<sup>1)</sup> A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

<sup>1)</sup> Not available in combination with R40

#### Indicators and control elements

#### Ready-to-close signaling switches (S20)



| Version                   | Contacts | Article No.        |
|---------------------------|----------|--------------------|
| Spare part for option C22 | 1 NO     | 3WL9111-0AH01-0AA0 |

#### Signaling switch (S22 or S23)



- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames.
   If this is not already available, please order additionally

 Version
 Contacts
 Article No.

 Spare part for options C26 and C27
 1st or 2nd auxiliary release
 3WL9111-0AH02-0AA0

#### 1st tripped signaling switch (S24)

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames.
   If this is not already available, please order additionally

VersionContactsArticle No.Spare part for option K071 CO3WL9111-0AH14-0AA0

#### 2nd tripped signaling switch (S25)

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames.
   If this is not already available, please order additionally
- · Can only be used in combination with 1st tripped signaling switch

| Version                   | Contacts | Article No.        |
|---------------------------|----------|--------------------|
| Spare part for option K06 | 1 NO     | 3WL9111-0AH17-0AA0 |

#### Operating cycles counters



- Only in conjunction with motorized operating mechanism
- VersionVersionArticle No.Spare part for option C01Mechanical3WL9111-0AH07-0AA0

#### Spring charge signaling switch

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames.
   If this is not already available, please order additionally

 Version
 Contacts
 Article No.

 Spare part for option C20
 1 NO
 3WL9111-0AH08-0AA0

#### Position signaling switches for guide frames



| Version                    | Contacts  | Article No.        |
|----------------------------|---|--------------------|
| Spare part for options R15 | 3 changeover contacts (1 $\times$ connected/1 $\times$ test/1 $\times$ disconnected position) | 3WL9111-0AH11-0AA0 |
| Spare part for options R16 | 6 changeover contacts (3 × connected/2 × test/1 × disconnected position)                      | 3WL9111-0AH12-0AA0 |

#### Local electric close (S10) for operator panel



- Not possible with communication port, order code "F02", "F12" or "F35".
- Not possible with motor disconnect switch
- Button + wiring (Auxiliary supply connector X7 required for circuit breakers or guide frames.
   If this is not already available, please order additionally)
- Note: Possible only for circuit breakers with closing coil.

| Version                                   | Туре                      | Article No.        |
|---|---------------------------|--------------------|
| <br>Spare part for options<br>C11 and C12 | With sealing cap C11      | 3WL9111-0AJ02-0AA0 |
|   | With CES assembly kit C12 | 3WL9111-0AJ03-0AA0 |
|   | With IKON assembly kit    | 3WL9111-0AJ05-0AA0 |

#### Indicators and control elements

| Motor disconnect switch (S12)    |   |                    |  |
|----------------------------------|---|--------------------|--|
|                                  | Mounting onto operator panel     Not possible with local electric close |                    |  |
|                                  | Version   | Article No.        |  |
| Spare part for option S25 3WL911 |   | 3WL9111-0AJ06-0AA0 |  |
| EMERGENCY-OFF pushbuttons        |   |                    |  |
| AT .                             | Mushroom pushbutton instead of the mechanical OFF pushbutton            |                    |  |
| CLOSE                            | Туре  | Article No.        |  |
| N SECONO                         | Spare part for option S24   | 3WL9111-0BA72-0AA0 |  |

#### **Auxiliary conductor connections**

| Male connectors for circ | cuit breakers ①                             |                              |
|--------------------------|---|------------------------------|
| NSEO_00978               |   | Article No.<br>3WA9111-0AB01 |
| Extension for male con   | nector                                      |                              |
|                          | Male connector must be ordered separately   |                              |
|                          | Version                                     | Article No.                  |
|                          | 1000 V                                      | 3WA9111-0AB02                |
| Auxiliary supply connec  | ctor for circuit breakers or guide frames ② |                              |
|                          | Version                                     | Article No.                  |
| NSEO_01268               | Screw connection (SIGUT)                    | 3WA9111-0AB03                |
| NSEO_01269               | Screwless connection (tension spring)       | 3WL9111-0AB04-0AA0           |
| Coding kits 3            |   |                              |
| <b>1</b> 4               | Version                                     | Article No.                  |
| NSE0_00974               | For fixed-mounted X5 to X8                  | 3WA9111-0AB07                |
| Sliding contact modules  | s for guide frames ④                        |                              |
| - S                      |   | Article No.                  |
| NSE0_008                 |   | 3WA9111-0AB08                |
| One-part sliding contac  | t modules for guide frames 6                |                              |
|                          | Version                                     | Article No.                  |
| NSEO_01586               | Screw connection (SIGUT)                    | 3WL9111-0AB18-0AA0           |
| Blanking blocks for circ | uit breakers                                |                              |
|                          |   | Article No.                  |
|                          |   | 3WA9111-0AB12                |

#### **Auxiliary release**

#### Closing coils/shunt trips



#### Note:

The closing coils (CC) and shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA see page 1/67

Please note: The communication-capable closing coils (CC-COM) can be used only in conjunction with 3WA.

#### Closing coils (CC), 5% ED (momentary duty) with disconnect switch S15



#### Note:

The closing coils (CC) with 5% OP are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA see page 1/68

#### Shunt trip (ST), 5% OP (momentary duty) with disconnect switch S14



#### Note:

The shunt trips (ST) with 5% OP are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA see page 1/68

#### Undervoltage release





#### Note:

The undervoltage releases (UVR and UVR-t) are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA see page 1/68

#### Operating mechanism

#### Motorized operating mechanisms



#### Note:

The motor operators are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA see page 1/68

#### **Auxiliary contacts**

# Auxiliary switch blocks

| Contacts    | Article No.        |
|-------------|--------------------|
| 2 NO + 2 NC | 3WL9111-0AG01-0AA0 |
| 2 NO        | 3WL9111-0AG02-0AA0 |
| 1 NO + 1 NC | 3WL9111-0AG03-0AA0 |

#### Door sealing frames, hoods, shutters

#### Door sealing frames Article No. Spare part for option T40 3WL9111-0AP01-0AA0

#### Protective covers IP55



Shutters

- Cannot be used in conjunction with door sealing frames
  Hood removable and can be opened on both sides

3WL9111-0AP02-0AA0 Version Breaking capacity Spare part for option R21 N, S, H 3WL9111-0AP04-0AA0 3-pole 1 2 N, S, H 3WL9111-0AP06-0AA0 C 3WL9111-0AP43-0AA0 H, C 3WL9111-0AP07-0AA0 3 4-pole N, S, H 3WL9111-0AP08-0AA0 2 N, S, H 3WL9111-0AP11-0AA0 3WL9111-0AP44-0AA0 3 H, C 3WL9111-0AP12-0AA0

| Arc chute        |  |      |                   |                    |
|------------------|--|------|-------------------|--------------------|
| Arc chute        |  |      |                   |                    |
| 27/2007/00-      | Voltage  | Size | Breaking capacity | Article No.        |
|                  | 690 V  | 1    | N, S, H           | 3WL9111-0AS01-0AA0 |
|                  |  | 2    | N, S, H           | 3WL9111-0AS02-0AA0 |
| P-1-1-11-21-11   |  |      | С                 | 3WL9111-0AS10-0AA0 |
|                  |  | 3    | Н, С              | 3WL9111-0AS03-0AA0 |
|                  | 1000 V/1150 V  | 2    | Н, С              | 3WL9111-0AS05-0AA0 |
|                  |  | 3    | Н, С              | 3WL9111-0AS06-0AA0 |
| Arc chute covers |  |      |                   |                    |
|                  | <ul> <li>Parts kit for guide fran</li> <li>Spare part for option F</li> <li>Not available for: <ul> <li>1000 V version (ord</li> </ul> </li> </ul> | R10  |                   |                    |



- 1150 V version (order code "A15")
- DC version
- 4000 A size 2
- Circuit breakers with very high breaking capacity C.



| Number of poles | Size | Article No.        |
|-----------------|------|--------------------|
| 3-pole          | 1    | 3WL9111-0AS32-0AA0 |
|                 | 2    | 3WL9111-0AS36-0AA0 |
|                 | 3    | 3WL9111-0AS38-0AA0 |
| 4-pole          | 1    | 3WL9111-0AS42-0AA0 |
|                 | 2    | 3WL9111-0AS44-0AA0 |
|                 | 3    | 3WL9111-0AS46-0AA0 |

#### Coding for withdrawable version

Coding for withdrawable version • By customer, for 36 coding variants Size Article No. 1, 2 3WL9111-0AR12-0AA0 3 3WL9111-0AR13-0AA0

#### **Grounding connections**

#### Grounding connection between the guide frame and the withdrawable circuit breaker



| • Up to 30 kA or 60 kA                  | ground-fault current                     |
|---|--|
| <ul> <li>2 modules must be u</li> </ul> | sed for up to 60 kA ground-fault current |
| Contact module                          | Size                                     |

| Contact module                    | Size    | Number of poles | Article No.        |
|-----------------------------------|---------|-----------------|--------------------|
| For guide frames                  | 1, 2 1) |                 | 3WL9111-0BA01-0AA0 |
|                                   | 3       |                 | 3WL9111-0BA02-0AA0 |
| For withdrawable circuit breakers | 1       | 3-pole          | 3WL9111-0BA05-0AA0 |
|                                   |         | 4-pole          | 3WL9111-0BA08-0AA0 |
|                                   | 2       | 3-pole 1)       | 3WL9111-0BA06-0AA0 |
|                                   |         | 4-pole 1)       | 3WL9111-0BA04-0AA0 |
|                                   | 3       | 3-pole          | 3WL9111-0BA07-0AA0 |
|                                   |         | 4-pole          | 3WL9111-0BA10-0AA0 |

<sup>1)</sup> Cannot be used for size 2 with very high breaking capacity C and size 2, 4000 A.

#### Support bracket

#### Support bracket



- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

3WL9111-0BB50-0AA0

#### **CubicleBUS** modules

- Each **Cubicle**BUS module is supplied with a 0.2 m pre-assembled cable to connect the modules with each other. A longer pre-assembled cable is required for connection to the circuit breaker.
- All communication components, **Cubicle**BUS modules and metering functions are available for the ETU45B and ETU76B electronic trip units.

| electionic trip units.   |   |                             |                    |  |  |  |
|--------------------------|---|-----------------------------|--------------------|--|--|--|
| Modules of the CubicleBL | Modules of the CubicleBUS modules   |                             |                    |  |  |  |
| S S                      | Туре  |                             | Article No.        |  |  |  |
| 010                      | Digital output module with rotary   | 3WL9111-0AT26-0AA0          |                    |  |  |  |
| NSEO                     | Digital output module, configurabl  | le, relay outputs           | 3WL9111-0AT20-0AA0 |  |  |  |
|                          | Digital input module  |                             | 3WL9111-0AT27-0AA0 |  |  |  |
|                          | Analog output module  |                             | 3WL9111-0AT23-0AA0 |  |  |  |
|                          | ZSI module  | 3WL9111-0AT21-0AA0          |                    |  |  |  |
| Preassembled cables for  | Preassembled cables for the CubicleBUS  |                             |                    |  |  |  |
|                          | For connection to 3WL   | Length                      | Article No.        |  |  |  |
|                          | With COM15/COM16/COM35  | 0.2 m                       | 3WL9111-0BC04-0AA0 |  |  |  |
|                          |   | 1 m                         | 3WL9111-0BC02-0AA0 |  |  |  |
|                          |   | 2 m                         | 3WL9111-0BC03-0AA0 |  |  |  |
|                          | Without COM15/COM16/COM35   | 2 m                         | 3WL9111-0BC05-0AA0 |  |  |  |
| Voltage transformers     |   |                             |                    |  |  |  |
|                          | <ul> <li>Required for 3WL circuit breakers with metering function Plus, if no direct voltage tap is available.</li> <li>380 690 V/100 V, class 0.5</li> </ul> |                             |                    |  |  |  |
|                          | Number of poles   | Metering function           | Article No.        |  |  |  |
|                          | 3-pole  | With metering function Plus | 3WL9111-0BB68-0AA0 |  |  |  |

#### **Retrofitting and spare parts**

• For retrofitting the COM15, COM16 or COM35 communications modules in withdrawable 3WL circuit breakers with Z options A05 (1000 V AC), A15 (1150 V AC) or A16 (690 V + 20%), the following additional assembly kits are required: 3WL9111-0AT62-0AA0 for circuit breakers size 1 or 3WL9111-0AT63-0AA0 for circuit breakers size 2/3

| circuit breakers s   | IZE 1 OF 3WL9111-UA163-UAAU FOR CIRCUIT Dreakers SIZE 2/3  |                                   |
|--|--|-----------------------------------|
| COM35 PROFINET IO/   | Modbus TCP modules   |                                   |
| munu /   | Version  | Article No.                       |
| E D D  | For ETU45B and ETU76B electronic trip units  | 3WL9111-0AT65-0AA0                |
| PROFINET IO/Modbus   | TCP retrofit kits  |                                   |
|  | <ul> <li>Retrofit kit for the PROFINET IO/Modbus TCP communication including COM35, BSS and set of cables<br/>for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units</li> </ul> |                                   |
|  |  | Article No.                       |
|  |  | 3WL9111-0AT66-0AA0                |
| PROFIBUS retrofit kits   |  |                                   |
|  | <ul> <li>Retrofit kit for the PROFIBUS communication including COM15, BSS and set of cables for all<br/>3WL air circuit breakers with ETU45B and ETU76B electronic trip units</li> </ul>               |                                   |
|  |  | Article No.                       |
|  |  | 3WL9111-0AT12-0AA0                |
| COM15 PROFIBUS mo  |  |                                   |
|  | Version For ETU45B and ETU76B electronic trip units  | Article No.<br>3WL9111-0AT15-0AA0 |
| The state of the s |  |                                   |
| COM16 Modbus RTU   |  | And also No                       |
|  | Version  | Article No.                       |
| Madhua DELL  | For ETU45B and ETU76B electronic trip units  | 3WL9111-0AT17-0AA0                |
| Modbus RTU retrofit  | Retrofit kit for the Modbus communication including COM16, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units   | _                                 |
|  |  | Article No.                       |
|  |  | 3WL9111-0AT18-0AA0                |
| Additional parts for r   | etrofitting the COM15/COM16/COM35 communications modules   |                                   |
|  | <ul> <li>In withdrawable 3WL circuit breakers with Z options:         <ul> <li>A05 (1000 V AC) or</li> <li>A15 (1150 V AC) or</li> <li>A16 (690 V + 20%)</li> </ul> </li> </ul>                        |                                   |
|  | Size   | Article No.                       |
|  | 1  | 3WL9111-0AT62-0AA0                |
|  | 2,3  | 3WL9111-0AT63-0AA0                |
| Breaker status senso   | <u> </u>   |                                   |
| To Marie   | Version  | Article No.                       |
|  | For acquisition via communication of the circuit breaker states ON/OFF/tripped     For ETU45B and ETU76B electronic trip units   | 3WL9111-0AT16-0AA0                |
| Operating instruction  | ·  |                                   |
|  | Description  | Article No.                       |
|  | 3WL operating instructions – Upgrade DE/EN   | 3ZW1012-0WL11-0AB1                |
|  | 3WL operating instructions – DE/EN   | 3ZX1812-0WL00-0AN4                |
|  | 3WL operating instructions – Upgrade IT/FR   | 3ZW1012-0WL11-0AD1                |
|  | 3WL operating instructions – IT/FR   | 3ZX1812-0WL00-0AJ3                |
|  | 3WL operating instructions – Upgrade ES/PT   | 3ZW1012-0WL11-0AE1                |
|  | 3WL operating instructions – ES/PT   | 3ZX1812-0WL00-0AL3                |
|  | Article number assignment for 3WL or 3WL upgrade   | Article No.                       |
|  | 3WL breakers   | 3WL13                             |
|  |  | 3WL14                             |
|  | 3WL breakers upgrade   | 3WL16                             |
|  |  | 3WL17                             |
|  | 3WL guide frames   | 3WL921A                           |
|  |  | 3WL921B                           |
|  |  | 3WL921D<br>3WL921E                |
|  | 3WL guide frames upgrade   | 3WL921F                           |
|  |  | 3WL921G                           |
|  |  | 3WL921H                           |
|  |  | 3WL921I                           |

#### **Interfaces**


#### Interface to the IEC 61850 • The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems. Operational voltage Article No. SICAM CP-8021 1) 6MF2802-1AA00 SICAM CP-8050<sup>2)</sup> 6MF2805-0AA00 SICAM PS-8620 6MF2862-0AA00 24 ... 60 V DC (12 W) SICAM PS-8622 110 ... 220 V DC (12 W) 6MF2862-2AA00

- Dimensioned for device quantities of max.  $1 \times 3WL$  and  $1 \times 3VA$
- <sup>2)</sup> Dimensioned for device quantities of  $3 \times 3WL$  and  $8 \times 3VA$

You will find further information at:

www.siemens.com/sicam-a8000

For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum. The modules can be obtained free of charge via SiePortal <a href="https://www.siemens.com/lowvoltage/product-support">www.siemens.com/lowvoltage/product-support</a> (109816057)

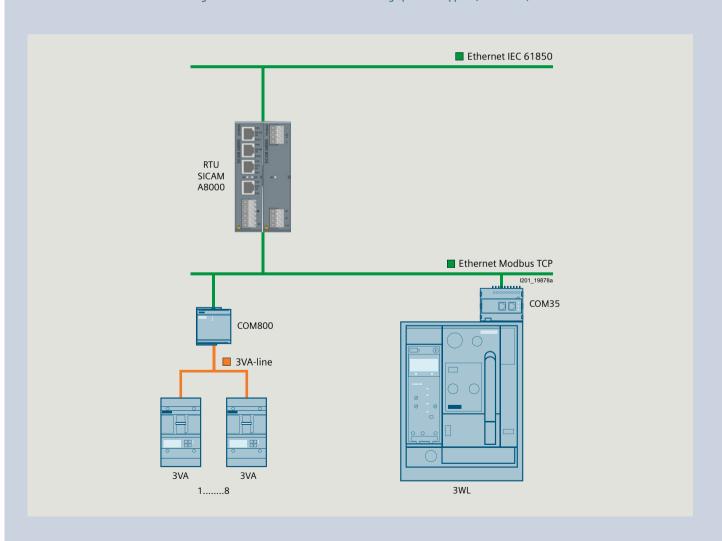

#### **Storage devices**

#### Capacitor trip device

- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA and 3WN circuit breakers
- Note: Rated control supply voltage must match the rated control supply voltage of the shunt trips.

| Rated control supply voltage/rated operational voltage |           | Article No. |  |                    |
|--|-----------|-------------|--|--------------------|
| 50/60 Hz AC  | DC        |             |  |                    |
| 220 240 V  | 220 250 V |             |  | 3WL9111-0BA14-0AA0 |

#### **Spare parts**

#### Metering function Plus for retrofitting

- As spare part or for retrofitting the metering function Plus with an external voltage transformer
  - For ETU45B or ETU76B Release 2
  - A measuring accuracy of 3% is achieved if retrofitted.
- Note: External voltage transformer required

| Article No.        |
|--------------------|
| 3WL9111-0AT05-0AA0 |

#### Voltage converter

| Version  | Article No.        |
|--|--------------------|
| As a spare part for the metering function Plus | 3WL9111-0AT06-0AA0 |

#### Components for conversion of an existing internal voltage tap

- Conversion requires 3 components for 3-pole 3WL
- Conversion requires 4 components for 4-pole 3WL
- Conversion of a metering function (Z option A05) is not possible.

| conversion or a metering randition                 | (2 option / tos) is not possible. |                     |
|--|-----------------------------------|---------------------|
| Conversion of internal voltage tap to main contact | Size                              | Article No.         |
| From bottom to top                                 | 1                                 | 3WL9111-0AT71-0AA0  |
|  | 2                                 | 3WL9111-0AT72-0AA0  |
|  | 3                                 | 3WL9111-0AT73-0AA0  |
| From top to bottom                                 | 1                                 | 3WL9111-0AT74-0AA0  |
|  | 2                                 | 3WL9111-0AT75-0AA0  |
|  | 3                                 | 3WI 9111-0AT76-0AA0 |

#### Transformers (without iron core), Rogowski coil only (instrument transformer for the protective function)

- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
- Undervoltage release required (e.g. 3WL9111-0AE01-0AA0)
- As retrofit kit or as spare part. With new circuit breakers, please use the Z option K60
- Scope of supply:
  - Transformer
  - Warning signs
  - Manual

| Number of poles | Size | Article No.        |
|-----------------|------|--------------------|
| 3-pole          | 1    | 3WL9111-0AA42-0AA0 |
|                 | 2    | 3WL9111-0AA43-0AA0 |
|                 | 3    | 3WL9111-0AA44-0AA0 |
| 4-pole          | 1    | 3WL9111-0AA45-0AA0 |
|                 | 2    | 3WL9111-0AA46-0AA0 |
|                 | 3    | 3WL9111-0AA47-0AA0 |

#### Main conductor connections, fixed-mounted versions (essential accessory)

| • Not for 3WL1 size 1 with high breaking capacity H  Size  Rated current $I_n$ 1 $\leq 1000 \text{ A}$ 1250 1600 A  24) $\leq 2000 \text{ A}$ $\leq 2500 \text{ A}$ $\leq 3200 \text{ A}$ $\leq 3200 \text{ A}$ $\leq 4000 \text{ A}$ Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H  Size  Rated current $I_n$  | Article No.  3WL9111-0AL01-0AA0  3WL9111-0AL02-0AA0  3WL9111-0AL03-0AA0  3WL9111-0AL05-0AA0  3WL9111-0AL06-0AA0  Article No.  3WL9111-0AL51-0AA0  3WL9111-0AL53-0AA0  3WL9111-0AL53-0AA0 |
|---|--|
| 1 ≤ 1000 A 1250 1600 A 240 ≤ 2000 A ≤ 2500 A ≤ 3200 A 3 ≤ 4000 A  Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H   | 3WL9111-0AL01-0AA0 3WL9111-0AL02-0AA0 3WL9111-0AL03-0AA0 3WL9111-0AL04-0AA0 3WL9111-0AL05-0AA0 3WL9111-0AL06-0AA0  Article No. 3WL9111-0AL51-0AA0 3WL9111-0AL51-0AA0                     |
| 1250 1600 A  ≥ 2000 A  ≥ 2500 A  ≥ 3200 A  3 ≥ 4000 A  Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H  | 3WL9111-0AL02-0AA0 3WL9111-0AL03-0AA0 3WL9111-0AL04-0AA0 3WL9111-0AL05-0AA0 3WL9111-0AL06-0AA0  Article No. 3WL9111-0AL51-0AA0 3WL9111-0AL52-0AA0  |
| 24) ≤ 2000 A ≤ 2500 A ≤ 3200 A  3 ≤ 4000 A  Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H   | 3WL9111-0AL03-0AA0 3WL9111-0AL04-0AA0 3WL9111-0AL05-0AA0 3WL9111-0AL06-0AA0  Article No. 3WL9111-0AL51-0AA0 3WL9111-0AL52-0AA0   |
| ≤ 2500 A  ≤ 3200 A  ≤ 4000 A  Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H   | 3WL9111-0AL04-0AA0 3WL9111-0AL05-0AA0 3WL9111-0AL06-0AA0  Article No. 3WL9111-0AL51-0AA0 3WL9111-0AL52-0AA0  |
| ≤ 3200 A  3 ≤ 4000 A  Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H   | 3WL9111-0AL05-0AA0  3WL9111-0AL06-0AA0  Article No.  3WL9111-0AL51-0AA0  3WL9111-0AL52-0AA0  |
| 3 ≤ 4000 A  Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H   | 3WL9111-0AL06-0AA0  Article No.  3WL9111-0AL51-0AA0  3WL9111-0AL52-0AA0  |
| Front-accessible main connections, single hole at bottom  • Not for 3WL1 size 1 with high breaking capacity H   | Article No.<br>3WL9111-0AL51-0AA0<br>3WL9111-0AL52-0AA0  |
| Not for 3WL1 size 1 with high breaking capacity H   | 3WL9111-0AL51-0AA0<br>3WL9111-0AL52-0AA0   |
|   | 3WL9111-0AL51-0AA0<br>3WL9111-0AL52-0AA0   |
| Size Rated current I <sub>n</sub>   | 3WL9111-0AL51-0AA0<br>3WL9111-0AL52-0AA0   |
|   | 3WL9111-0AL52-0AA0   |
| g 1 ≤ 1000 A  |  |
| 1250 1600 A   | 3WL9111-0AL53-0AA0   |
| 2 <sup>4</sup> ≤ 2000 A   |  |
| ≤ 2500 A  | 3WL9111-0AL54-0AA0   |
| ≤ 3200 A  | 3WL9111-0AL55-0AA0   |
| 3 ≤ 4000 A  | 3WL9111-0AL56-0AA0   |
| Front-accessible main connections according to DIN 43673, double hole at top  |  |
| Size Rated current I <sub>n</sub>   | Article No.  |
| 1 ≤ 1000 A <sup>1)</sup>  | 3WL9111-0AL07-0AA0   |
| 1250 2000 A <sup>5)</sup>   | 3WL9111-0AL08-0AA0   |
| ≤ 2000 A  | 3WL9111-0AL11-0AA0   |
| (a)   | 3WL9111-0AL12-0AA0   |
| ≤ 3200 A  | 3WL9111-0AL13-0AA0   |
| 3 ≤ 4000 A  | 3WL9111-0AL14-0AA0   |
| Front-accessible main connections according to DIN 43673, double hole at bottom   |  |
| Size Rated current I <sub>n</sub>   | Article No.  |
| 1 ≤ 1000 A ¹)   | 3WL9111-0AL57-0AA0   |
| 1250 2000 A <sup>5)</sup>   | 3WL9111-0AL58-0AA0   |
| <u>ξ</u> 2 <sup>4)</sup> ≤ 2000 A   | 3WL9111-0AL61-0AA0   |
| \$\frac{1}{2000} \big  \big  \frac{1000}{2000} \big  \big | 3WL9111-0AL62-0AA0   |
| ≤ 3200 A  | 3WL9111-0AL63-0AA0   |
| 3 ≤ 4000 A  | 3WL9111-0AL64-0AA0   |
| Rear vertical main connections  |  |
| Size Rated current I <sub>n</sub>   | Article No.  |
| 1 <sup>2)</sup> ≤ 2000 A  | 3WL9111-0AM01-0AA0   |
| 2 <sup>3)</sup> ≤ 3200 A  | 3WL9111-0AM02-0AA0   |
| <sup>8</sup> 000 A ≤ 6300 A   | 3WL9111-0AM03-0AA0   |

Not for 3WL1 size 1 with high breaking capacity H
 In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WL9111-0AM01-0AA0 vertical connection is required, up to 2000 A or with breaking capacity H two 3WL9111-0AM01-0AA0 vertical connections are required.
 In the case of vertical connection size 2, up to 2500 A one 3WL9111-0AM02-0AA0 vertical connection is required,

up to 3200 A two 3WL9111-0AM02-0AA0 vertical connections are required.

<sup>4)</sup> Not for circuit breakers with very high breaking capacity C.

<sup>&</sup>lt;sup>5)</sup> Can be used for size 1 with H breaking capacity of 630 ... 2000 A.

#### Main conductor connections, withdrawable versions (essential accessory)

|                                       | onnections, single hole at top o | ar at hottom 1) 2)                   |                              |                    |
|---------------------------------------|----------------------------------|--------------------------------------|------------------------------|--------------------|
| Tront accessible main c               | Size                             | Rated current In                     |                              | Article No.        |
| ****                                  | 1                                | ≤ 1000 A                             |                              | 3WL9111-0AN01-0AA0 |
| 2                                     | '                                | 1250 1600 A                          |                              | 3WL9111-0AN02-0AA0 |
| SEO_01013                             | 2 <sup>3)</sup>                  | ≤ 2000 A                             |                              | 3WL9111-0AN03-0AA0 |
| S G                                   | 2                                | ≤ 2500 A<br>≤ 2500 A                 |                              | 3WL9111-0AN04-0AA0 |
| Ž Ž                                   |                                  | ≤ 3200 A                             |                              | 3WL9111-0AN05-0AA0 |
|                                       | 3                                |                                      |                              |                    |
| Event econolible main a               |                                  | ≤ 4000 A                             | 1)                           | 3WL9111-0AN06-0AA0 |
| Front-accessible main c               |                                  | 673, double hole at top or at bott   | om <sup>,</sup>              | Article No.        |
| 0000                                  | Size                             | Rated current I <sub>n</sub>         |                              |                    |
|                                       | 1                                | ≤ 1000 A <sup>2)</sup>               |                              | 3WL9111-0AN07-0AA0 |
| 101                                   | 0.7)                             | 1250 2000 A <sup>3)</sup>            |                              | 3WL9111-0AN08-0AA0 |
|                                       | 2 3)                             | ≤ 2000 A                             |                              | 3WL9111-0AN11-0AA0 |
| 200 Z                                 |                                  | ≤ 2500 A                             |                              | 3WL9111-0AN12-0AA0 |
|                                       |                                  | ≤ 3200 A                             |                              | 3WL9111-0AN13-0AA0 |
|                                       | 3                                | ≤ 4000 A                             |                              | 3WL9111-0AN14-0AA0 |
| Supports for front and I              |                                  |                                      |                              |                    |
|                                       | Number of poles                  | Size                                 |                              | Article No.        |
| \                                     | 3-pole for 3 bars                | 1                                    |                              | 3WL9111-0AN41-0AA0 |
|                                       |                                  | 2                                    |                              | 3WL9111-0AN42-0AA0 |
|                                       |                                  | 3                                    |                              | 3WL9111-0AN43-0AA0 |
| <u> </u>                              | 4-pole for 4 bars                | 1                                    |                              | 3WL9111-0AN44-0AA0 |
|                                       |                                  | 2                                    |                              | 3WL9111-0AN45-0AA0 |
|                                       |                                  | 3                                    |                              | 3WL9111-0AN46-0AA0 |
| Rear vertical main conn               | ections                          |                                      |                              |                    |
| 01015                                 | Size                             | Rated current I <sub>n</sub>         | Connection pieces            | Article No.        |
| 5                                     | 1                                | ≤ 1000 A <sup>2)</sup>               |                              | 3WL9111-0AN15-0AA0 |
| i i i i i i i i i i i i i i i i i i i |                                  | 1250 2000 A <sup>2)</sup>            |                              | 3WL9111-0AN16-0AA0 |
| 2                                     | 2                                | ≤ 2000 A <sup>4)</sup>               |                              | 3WL9111-0AN17-0AA0 |
|                                       |                                  | ≤ 2500 A <sup>4)</sup>               |                              | 3WL9111-0AN18-0AA0 |
|                                       |                                  | ≤ 3200 A <sup>4)</sup>               |                              | 3WL9111-0AN21-0AA0 |
|                                       | 3                                | ≤ 5000 A                             |                              | 3WL9111-0AN22-0AA0 |
|                                       |                                  | ≤ 6300 A                             | 3 pieces for 3-pole switches | 3WL9111-0AN23-0AA0 |
|                                       |                                  | ≤ 6300 A, top                        | 4 pieces for 4-pole switches | 3WL9111-0AN20-0AA0 |
|                                       |                                  | ≤ 6300 A, bottom                     | 4 pieces for 4-pole switches | 3WL9111-0AN10-0AA0 |
| Rear horizontal main co               | onnections                       |                                      |                              |                    |
|                                       | Size                             | Rated current I <sub>n</sub>         |                              | Article No.        |
|                                       | 1                                | ≤ 1000 A <sup>2)</sup>               |                              | 3WL9111-0AN32-0AA0 |
|                                       |                                  | 1250 2000 A <sup>2)</sup>            |                              | 3WL9111-0AN33-0AA0 |
|                                       | 2                                | ≤ 2000 A <sup>4)</sup>               |                              | 3WL9111-0AN34-0AA0 |
|                                       |                                  | ≤ 2500 A <sup>4)</sup>               |                              | 3WL9111-0AN35-0AA0 |
|                                       |                                  | ≤ 3200 A <sup>4)</sup> and 4000 A DC |                              | 3WL9111-0AN36-0AA0 |
|                                       | 3                                | ≤ 5000 A                             |                              | 3WL9111-0AN37-0AA0 |
| Connecting flange                     |                                  |                                      |                              |                    |
| <u> </u>                              | Size                             | Rated current I <sub>n</sub>         |                              | Article No.        |
|                                       | 1                                | ≤ 1000 A <sup>2)</sup>               |                              | 3WL9111-0AN24-0AA0 |
|                                       |                                  | 1250 2000 A <sup>2)</sup>            |                              | 3WL9111-0AN25-0AA0 |
|                                       | 2 <sup>3)</sup>                  | ≤ 2000 A                             |                              | 3WL9111-0AN26-0AA0 |
| NSEO_01016                            | _                                | ≤ 2500 A                             |                              | 3WL9111-0AN27-0AA0 |
| ~ ~                                   |                                  | ≤ 3200 A                             |                              | 3WL9111-0AN28-0AA0 |
|                                       | 3                                | ≤ 4000 A                             |                              | 3WL9111-0AN31-0AA0 |
|                                       | ,                                | ≥ 4000 ∧                             |                              | JWL9111-UMN31-UMAU |

When using front-accessible main connections (withdrawable circuit breakers) supports are required.
 Not for 3WL1 size 1 with high breaking capacity H
 Can be used for frame size 1 with H breaking capacity of 630 A ... 2000 A.
 Not for circuit breakers with very high breaking capacity C.

#### **Conversion kit**

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers

- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WL1 circuit breakers with very high breaking capacity C and for circuit breakers with Z options A05, A15 or A16

| breakers with very mgm | or canning capacity carre | rer encare preamers with 2 options 7 to 5, 7 to 6 7 to 6 |                    |
|------------------------|---------------------------|--|--------------------|
| Number of poles        | Size                      |  | Article No.        |
| 3-pole                 | 1                         |  | 3WL9111-0BC11-0AA0 |
|                        | 2                         |  | 3WL9111-0BC12-0AA0 |
|                        | 3                         |  | 3WL9111-0BC13-0AA0 |
| 4-pole                 | 1                         |  | 3WL9111-0BC14-0AA0 |
|                        | 2                         |  | 3WL9111-0BC15-0AA0 |
|                        | 3                         |  | 3WL9111-0BC16-0AA0 |

#### Note:

When the conversion kit is ordered, the switch ID (on the operator panel of the 3WL) must also be stated

#### Main contact elements




- Notes:
  - The circuit breaker ID number must be specified when ordering <sup>3)</sup>
  - Specified for each connection
  - (depending on the number of poles on the circuit breaker, order 3 or 4 units)
  - Article number is automatically adapted to the circuit breaker ID No.

| Size | Rated current I <sub>n</sub> | Article No.          |
|------|------------------------------|----------------------|
| 1    | ≤ 1600 A <sup>4)</sup>       | 3WL9111-0AM90<br>L1Y |
| 2    | ≤ 2500 A                     | 3WL9111-0AM91<br>L1Y |
|      | ≤ 4000 A                     | 3WL9111-0AM92<br>L1Y |
| 3    | ≤ 6300 A                     | 3WL9111-0AM93        |


- 1) Not for circuit breakers with very high breaking capacity C.
- 2) Replacement of the main contact elements for 3WL1 circuit breakers with very high breaking capacity C is only possible at the factory.
- 3) Please specify the circuit breaker ID No. in plain text when ordering.
- 4) Not for size  $\hat{1}$  circuit breakers with breaking capacity H and circuit breakers with  $I_n = 2000$  A. The main contact elements can only be replaced in the factory.

### Online configurator highlights

### www.siemens.com/lowvoltage/configurators

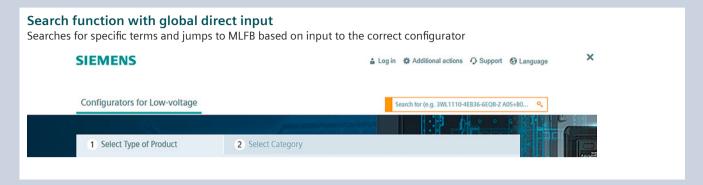


### 

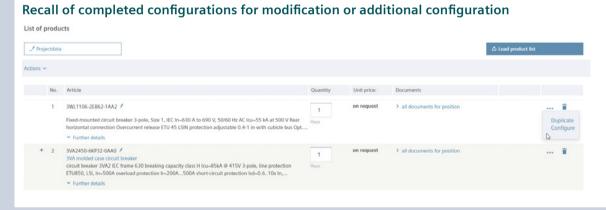




#### www.siemens.com/lowvoltage/3wl10-configurator


#### Download an ePlan selector for 3WL10

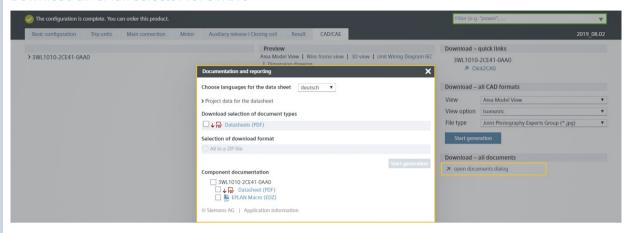

#### Mouseover display of characteristic curves to show the protective function

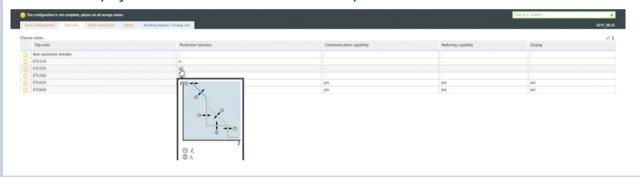

#### Direct entry of an already known article number or parts of an article number

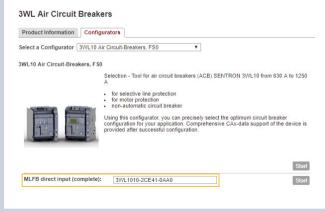


### Structure of the article numbers

### Basic configuration

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator

| www.sicificii.  | s.com/lowvoltag  | ge/3WITO-COIII   | ilgulatoi                                     |   |                  |             |         |                       |    |    |    |    |
|---|--|--|---|---|------------------|-------------|---------|-----------------------|----|----|----|----|
|   |  | 3WL10  | 6 7   | - 8   | 9                | 10          | 11      | 12                    | 13 | 14 | 15 | 16 |
|   | kers, non-aut  | comatic  | Ш   | П   | ı                | ı           | П       | П                     |    |    |    |    |
| Max. rated<br>current I <sub>n max</sub>                              | 630 A<br>800 A<br>1000 A<br>1250 A                                     |  | 0 6<br>0 8<br>1 0<br>1 2                      |   |                  |             |         |                       |    |    |    |    |
| Short-circuit<br>breaking capacity <i>I</i> <sub>cu</sub><br>at 415 V | B Basic (42 kA) N ECO (55 kA) S Standard (66 k                         | A)   |   | 1<br>2<br>3   |                  |             |         |                       |    |    |    |    |
| Non-automatic<br>circuit breaker <sup>1)</sup>                        | Without<br>metering function,<br>without communi-<br>cations interface | Without trip unit  |   |   | Α                | A           |         |                       |    |    |    |    |
| Circuit breakers,<br>ETU 3-series                                     | Without<br>metering function,<br>without communi-<br>cations interface | With trip unit   | ETU320 LI<br>ETU350 LSI<br>ETU360 LSIG        | (N) <sup>2)</sup><br>(N) <sup>2)</sup><br>(N) <sup>2)</sup> | A<br>A           | B<br>C<br>D |         |                       |    |    |    |    |
| Circuit breakers,<br>ETU 6-series                                     | Without communications   | With trip unit Without metering f  | ETU650 LSI<br>ETU660 LSIG<br>unction          | (N) <sup>2)</sup> (N) <sup>2)</sup>                         | A                | E<br>F      |         |                       |    |    |    |    |
|   | interface With communications interface                                | Without metering f<br>Metering function<br>Basic<br>Metering function<br>Advanced                              |   | n top<br>n bottom   | B<br>C<br>D<br>E |             |         |                       |    |    |    |    |
|   | ECO (55 kA) and S = Standa<br>ection for 3-pole breakers v             |  |   |   |                  | akers       |         |                       |    |    |    |    |
| Number of poles   | Fixed-mounted versions   | 4-pole   | Neutral left<br>Neutral right                 |   |                  |             | 0 1 2 3 |                       |    |    |    |    |
|   | Withdrawable   | 3-pole<br>4-pole   | Neutral left<br>Neutral right                 |   |                  |             | 4 5     |                       |    |    |    |    |
| Connection  | 3)   |  |   |   |                  |             |         |                       |    |    |    |    |
| Type of mounting  | Withdrawable   | Without frame<br>Rear vertical conne<br>Rear horizontal con<br>Adapter for cable lu<br>Front-accessible, ex    | nnection<br>ug connection (                   |   |                  |             |         | 0<br>1<br>2<br>4<br>5 |    |    |    |    |
|   | Fixed-mounted versions   | Rear vertical conne<br>Rear horizontal con<br>Front main connect<br>Circular conductor<br>Front-accessible, ex | ction<br>nnection<br>tion<br>terminals (front | t)  |                  |             |         | 1<br>2<br>3<br>4<br>5 |    |    |    |    |

<sup>3)</sup> Broadened connections available as accessories.

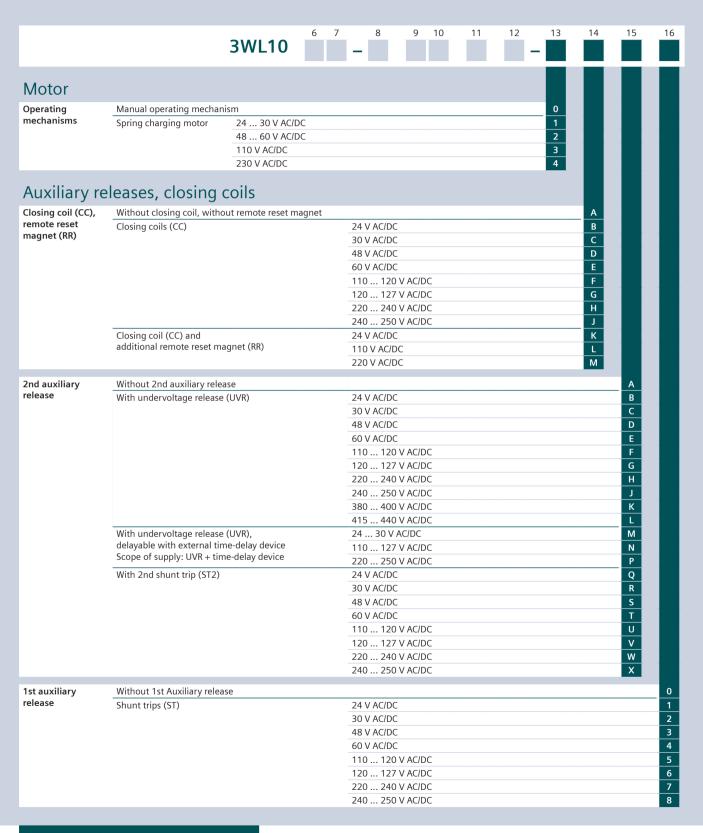

## **Accessory options**

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator

| To specify the options, ac  | ld "-Z" to the complete article ทเ  | umber and                       |                          |                        | Order code |
|---|---|---------------------------------|--------------------------|------------------------|------------|
| indicate the appropriate  | order code(s).  |                                 | 3///                     | Z                      |            |
|   |   |                                 | J VV L.                  | ···                    |            |
|   |   |                                 |                          |                        |            |
| Accessories for b   | asic configuration  |                                 |                          |                        |            |
| Mounting options for  | or fixed-mounted versions   |                                 |                          |                        |            |
| · ·   | he fixed-mounted circuit breaker is mo  |                                 | or mounting is possible  | e as an option.        |            |
|   | y be modified if it is to be extended to  | •                               | J 1                      | •                      |            |
| interlocking mechanism. <sup>1)</sup>   |   |                                 |                          |                        |            |
| Mounting options for  | Floor mounting  |                                 | Mounting support         | standard               | A07        |
| fixed-mounted versions 1)   |   |                                 | Mounting support         | extended <sup>2)</sup> | S56        |
|   | Rear panel mounting onto mounting   | g plate                         | Side wall extended       | 2)                     | S57        |
|   |   |                                 |                          |                        |            |
| Accessories for E   | TU electronic trip un   | its                             |                          |                        |            |
| Rating plugs  | ·   |                                 |                          |                        |            |
| ~   | trin units are equipped with a rating pl  | us for catting the rated curren | t L. which is agual to t | ha mavimum ratad       |            |
|   | trip units are equipped with a rating pl<br>max). The rated current of the selected r     |                                 |                          | ne maximum rateu       |            |
| To downrate the circuit brea  | aker, a rated current smaller than $I_{\text{n max}}$                                     | is selected for the rating plug |                          |                        |            |
| Other functions can also be   | activated using rating plugs (L = OFF of  | or Rc protection).              |                          |                        |            |
| Rating plug   | For setting the rated current $I_n$   |                                 | For all ETUs             | 400 A                  | B04        |
|   |   |                                 |                          | 630 A                  | B06        |
|   |   |                                 |                          | 800 A                  | B08        |
|   |   |                                 |                          | 1000 A                 | B10        |
|   | For setting the rated current $I_n$ ,   |                                 | For 6-series ETUs        | 400 A                  | L04        |
|   | with overload protection L = OFF  |                                 |                          | 630 A                  | L06        |
|   |   |                                 |                          | 800 A                  | L08        |
|   |   |                                 |                          | 1000 A                 | L10        |
|   |   |                                 |                          | 1250 A                 | L12        |
|   | For setting the rated current $I_n$ , for enabling of the residual current $\mathfrak{g}$ | protective function             | For ETU660 only          | 400 A                  | G04        |
|   | The residual current function is only   |                                 |                          | 630 A                  | G06        |
|   | Advanced metering function.   |                                 |                          | 800 A                  | G08        |
|   |   |                                 |                          | 1250 A                 | G12        |
| Communications mo   | odules  |                                 |                          |                        |            |
| No more than two different  | communications modules can be used  | d at the same time.             |                          |                        |            |
| When using an IOM040 dig  | ital I/O module (Z option K56), only 1 o  | communications module can b     | e used.                  |                        |            |
| Communications modules  | COM040  | PROFIBUS                        |                          |                        | F02        |
|   | COM041  | PROFINET                        |                          |                        | F03        |
|   | COM043  | Modbus TCP                      |                          |                        | F11        |
|   | COM042  | Modbus RTU                      |                          |                        | F12        |
| Duankou Commont   | dulas   |                                 |                          |                        |            |
| Breaker Connect mo  |   |                                 |                          | 1 6:1                  |            |
| <ul> <li>When a circuit breaker with<br/>electronic components is al</li> </ul> | a communications interface is ordered so supplied ready installed.                        | a, a Breaker Connect module fo  | or external 24 V DC pol  | ver supply of the      |            |
| ·   | he Breaker Connect module for 24 V D  | C is replaced by a Breaker Coni | nect module for 110      | 240 V AC/DC.           |            |
| Breaker Connect modules   | 110 240 V AC/DC   |                                 |                          |                        | F26        |
|   |   |                                 |                          |                        |            |
| I/O modules interna   |   |                                 |                          |                        |            |
| I/O modules internal  | Digital I/O module IOM040   | 2 inputs, 2 outputs             |                          |                        | K56        |
|   |   | •                               |                          |                        |            |

<sup>&</sup>lt;sup>1)</sup> These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.
<sup>2)</sup> Not possible in connection with or as an alternative to the mounting support, standard (A07).

| To specify the options, a appropriate order code(s  | dd "-Z" to the complete article n<br>s).   | umber and indicate                                  | the 3WLZ                                | Order code |
|---|--|---|---|------------|
| Accessories for t   | the motor  |   |   |            |
| Mechanical operating cycles   | s sounter 5 digit  |   |   | C01        |
| wechanical operating cycles   | s counter, 3-digit   |   |   | CUI        |
| Auxiliary switch  | es and signaling swit  | ches  |   |            |
| Auxiliary and signaling swi     For currents < 100 mA for I     The auxiliary/signaling swit     a minimum load above | itches for currents > 100 mA and up to<br>PLC connections, these auxiliary and si<br>tches for 24 V DC digital signals are des | 400 V AC are installed a<br>gnaling switches can be |   |            |
| Position signaling switches   | for guide frames 1)  | 2 CO   2 CO   2 CO (cor                             | nnected   test   disconnected position) | K55        |
| Signaling switches  | Ready-to-close signaling switches  |   | 1 CO digital, 24 V DC                   | K50        |
|   | Tripped signaling switches (S24)   |   | 1 CO digital, 24 V DC                   | K53        |
|   | Spring charge signaling switch (S21  | )   | 1 CO digital, 24 V DC                   | K54        |
| Auxiliary switches  | ON/OFF AUX   | 4 CO digital, 24 V DC                               |   | K51        |
| ,   |  | 2 CO 400 V AC + 2 CO                                | digital 24 V DC                         | K52        |
| Locking, blockin  | ng and interlocking  |   |   |            |
| Locking provisions 1)   | To prevent movement of   | Cylinder lock                                       | Made by RONIS                           | R78        |
|   | the withdrawable circuit breaker   | For no more than 3 pa                               | dlocks, 8 mm                            | R65        |
| Locking mechanisms  | To prevent movement to disconnec   | ted position  |   | R79        |
| Locking provisions  | Against unauthorized closing   | Cylinder lock, made by                              | RONIS                                   | S08        |
|   | in the operator panel (safe OFF)   | For no more than 3 pa                               | dlocks, plastic 4 mm                    | S22        |
|   |  | For no more than 1 pa                               | dlock, metal 7 mm                       | S23        |
|   |  | For no more than 2 pa                               | dlocks, metal 8 mm                      | S07        |
| Interlocking sets   | For mechanical Open and/or Close   | For no more than 3 pa                               | dlocks, plastic 4 mm                    | S42        |
|   | on the operator panel  | For no more than 1 pa                               | dlock, metal 7 mm                       | S43        |
|   |  | For no more than 2 pa                               | dlocks, metal 8 mm                      | S44        |
| Protective covers   | For mechanical Open/Close, not loc   | kable   |   | S41        |
| Door sealing frames IP30  | IP3x   |   |   | T30        |
|   |  |   |   |            |

 $<sup>^{1)}</sup>$  Can be used both for individual orders of the guide frame and complete orders (circuit breaker + guide frame).

### **Guide frames**

#### Guide frames for ordering separately without circuit breakers



- Guide frames without breakers up to 1250 A
- Note: All CB bus modules for communication COM04x/IOM300/Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the circuit breaker. PSS Standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

| Number of poles | Connection type   | Article No.   |
|-----------------|---|---------------|
| 3-pole          | Rear vertical   | 3VW8112-0AA01 |
|                 | Rear horizontal   | 3VW8112-0AB01 |
|                 | $4 \times 240 \text{ mm}^2$ Cu/Al cable connection, for cable lug connections | 3VW8112-0AD01 |
|                 | Front connection bars, extended   | 3VW8112-0AE01 |
| 4-pole          | Rear vertical   | 3VW8112-0BA01 |
|                 | Rear horizontal   | 3VW8112-0BB01 |
|                 | $4 \times 240 \text{ mm}^2$ Cu/Al cable connection, for cable lug connections | 3VW8112-0BD01 |
|                 | Front connection bars, extended   | 3VW8112-0BE01 |

| To specify the options, add "-7  | " to the complete article nu                                   | mher and  | Order code |  |
|--|--|---|------------|--|
| To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).  3VW8Z |  |   |            |  |
| Locking, blocking a  | nd interlocking  |   |            |  |
| Locking provisions   | To prevent movement of the                                     | Cylinder lock, made by RONIS                                  | R78        |  |
|  | withdrawable circuit breaker For no more than 3 padlocks, 8 mm |   |            |  |
| Locking mechanisms   | To prevent movement to disco                                   | nnected position (only in combination with R78 or R65)        | R79        |  |
| Auxiliary/signaling s  | switches   |   |            |  |
| Position signaling switch PSS for guide frame  | For 24 V DC digital signals, for minimum currents              | 2 CO   2 CO   2 CO (connected   test   disconnected position) | K55        |  |

Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard. For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be modified.

The auxiliary/signaling switches for 24 V DC digital signals are designed for

a minimum load above 1 mA at 5 V DC, and

- a maximum breaking capacity of 100 mA at 24 V DC.

# ETU electronic trip units and accessories

| Electronic trip units                   | (ETU)  |   |               |                        |               |
|---|--|---|---------------|------------------------|---------------|
|   | Version  | With communications/metering function/<br>enhanced protective functions | Туре          | Protective<br>function | Article No.   |
|   | With rotary coding switches  | No  | ETU320        | LIN                    | 3VW9011-5AA00 |
| 6 0 ш                                   |  |   | ETU350        | LSIN                   | 3VW9012-5AA00 |
| 0                                       |  |   | ETU360        | LSING                  | 3VW9012-7AA00 |
| 7-50 (A)                                | With display   | Yes   | ETU650        | LSIN                   | 3VW9017-5AA00 |
| 44                                      |  |   | ETU660        | LSING                  | 3VW9017-7AA00 |
| Metering functions                      | for ETU650 or ETU660   |   |               |                        |               |
| No.                                     | Description  | Protective function/version   | Arrangemer    | nt                     | Article No.   |
| 0                                       | Metering function  | MF Basic  | -             |                        | 3VW9011-0AT01 |
| 5                                       |  | MF Advanced   | -             |                        | 3VW9011-0AT04 |
|   | Set of cables for voltage tap  | For 4-pole circuit breakers with neutral right                          | Top or bottor | m                      | 3VW9011-0AT08 |
|   | for MF   | For 4-pole circuit breakers with neutral left                           | Тор           |                        | 3VW9011-0AT75 |
| Distance along the same                 |  |   | Bottom        |                        | 3VW9011-0AT76 |
| 100000000000000000000000000000000000000 |  | For 3-pole circuit breakers   | Тор           |                        | 3VW9011-0AT72 |
|   |  |   | Bottom        |                        | 3VW9011-0AT73 |
| External current tra                    | nsformers for N conductor  |   |               |                        |               |
| 0111                                    | Accessory for  | Use   |               |                        | Article No.   |
|   | ETU320, ETU350, ETU360,<br>ETU650, ETU660                                      | For 3-pole circuit breakers only  |               |                        | 3VW9011-0AA30 |
| External current tra                    | nsformers for transformer nei  | utral point   |               |                        |               |
|   | Accessory for  | G <sub>ret</sub> (Ground return)  |               |                        | Article No.   |
|   | ETU660   | 100 A   |               |                        | 3VW9011-0GF30 |
|   |  | 250 A   |               |                        | 3VW9011-0GF31 |
| Summation current                       | transformers external Rc-CT f  | or residual current metering  |               |                        |               |
|   | Only with MF Advanced m  | etering function and Rc rating plug                                     |               |                        |               |
|   | Accessory for  | Use   |               |                        | Article No.   |
|   | ETU660   | For external residual current metering                                  |               |                        | 3VW9011-0RC30 |
| Remote reset magn                       | ets RR for the circuit breakers  | including tripped signaling   |               |                        |               |
| Ţ,                                      | <ul> <li>Remote reset magnet (RR)<br/>after tripping as a result of</li> </ul> | for resetting the circuit breaker overcurrent conditions                |               |                        |               |
|   | Accessory for  | Voltage   |               |                        | Article No.   |
|   | ETU320, ETU350, ETU360,  | 24 V DC   |               |                        | 3VW9011-0AK03 |
| Q.                                      | ETU650, ETU660   | 110 V AC/DC   |               |                        | 3VW9011-0AK05 |
|   |  | 250 V AC/DC   |               |                        | 3VW9011-0AK06 |
| Spare part batteries                    | for ETU electronic trip unit   |   |               |                        |               |
|   | Accessory for  |   |               |                        | Article No.   |
|   | ETU320, ETU350, ETU360, ET   | U650, ETU660  |               |                        | 3VW9011-0AT38 |

### ETU electronic trip units and accessories

# Rating plugs

• Only one module is possible per circuit breaker.

| Accessory for               | Version   | Rated current I <sub>n</sub> | Article No.   |
|-----------------------------|---|------------------------------|---------------|
| ETU320, ETU350, ETU360,     | Rating plugs for setting ( $< I_{\rm nmax}$ ) the rated current $I_{\rm n}$   | 400 A                        | 3VW9011-0AA53 |
| ETU650, ETU660              |   | 630 A                        | 3VW9011-0AA55 |
|                             |   | 800 A                        | 3VW9011-0AA56 |
|                             |   | 1000 A                       | 3VW9011-0AA57 |
|                             |   | 1250 A                       | 3VW9011-0AA58 |
| ETU 6-series                | Rating plug without overload protection (L = OFF) and for setting ( $< I_{\rm n \; max}$ ) the rated current $I_{\rm n}$                                      | 400 A                        | 3VW9011-0LF53 |
|                             |   | 630 A                        | 3VW9011-0LF55 |
|                             |   | 800 A                        | 3VW9011-0LF56 |
|                             |   | 1000 A                       | 3VW9011-0LF57 |
|                             |   | 1250 A                       | 3VW9011-0LF58 |
| ETU660                      | Rating plug Rc for ETU660, for enabling the   | 400 A                        | 3VW9011-0RC53 |
|                             | residual current protective function and setting $(< I_{n \text{ max}})$ the rated current $I_n$ . The residual current function is only possible with the MF | 630 A                        | 3VW9011-0RC55 |
|                             |   | 800 A                        | 3VW9011-0RC56 |
| Advanced metering function. |   | 1250 A                       | 3VW9011-0RC58 |

#### CB bus modules – communications modules



- Contains the communications module
- No more than two different communications modules can be used at the same time
- When using a digital I/O module IOM040 (Z option K56), only 1 communications module can be used
- Can only be used with ETU of the 6-series and require a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communications interface to the ETU 6-series is selected.

| Communications module | Protocol   | Article No.   |
|-----------------------|------------|---------------|
| COM040                | PROFIBUS   | 3VW9011-0AT15 |
| COM041                | PROFINET   | 3VW9011-0AT14 |
| COM043                | Modbus TCP | 3VW9011-0AT16 |
| COM042                | Modbus RTU | 3VW9011-0AT17 |

#### CB bus modules – I/O modules external IOM300



For snapping onto DIN rail

| Accessory for | Maximum switching current per contact  | Inputs | Outputs | Article No.   |
|---------------|--|--------|---------|---------------|
| ETU 6-series  | <ul> <li>2 A at ≤ 30 V DC</li> <li>0.8 A at 50 V DC</li> <li>0.2 A at 150 V DC</li> <li>4 A at 250 V AC</li> </ul> | 11     | 10      | 3VW9011-0AT20 |

#### CB bus modules – I/O modules internal IOM040



• When using a digital I/O module IOM040, only 1 communications module can be used

| Accessory for | Maximum switching current per contact  | Inputs | Outputs | Article No.   |
|---------------|--|--------|---------|---------------|
| ETU 6-series  | <ul> <li>2 A at ≤ 30 V DC</li> <li>0.8 A at 50 V DC</li> <li>0.2 A at 150 V DC</li> <li>4 A at 250 V AC</li> </ul> | 2      | 2       | 3VW9011-0AT30 |

#### Actuator module COM ACT



- For switching the circuit breaker on/off remotely via communication
- Actuation of the closing coil (CC) and the 1st shunt trip (ST)
- Can only be used in combination with a communications module, spring charging motor, closing coil and 1st shunt trip
- Automatically included if the communications interface of the ETU 6-series is selected in the basic circuit breaker configuration

| Accessory for | Article No.   |
|---------------|---------------|
| ETU 6-series  | 3VW9011-0AT10 |



• For external power supply for the electronics components

| Voltage         | Article No.   |
|-----------------|---------------|
| 110 240 V AC/DC | 3VW9011-0AT06 |
| 24 48 V DC      | 3VW9011-0AT07 |

#### Auxiliary contact signaling switch for communications interface



- Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions.

- Can only be used in combination with communications module.
  Can be combined with standard position signaling switches or ready-to-close signaling contacts.
  Note: Both signaling switches are automatically included in the basic circuit breaker (COM PSS only with withdrawable versions) if the communications interface of the ETU 6-series is selected.

| Function  | Article No.   |
|---|---------------|
| Ready-to-close signaling switch for communication COM RTC         | 3VW9011-0AT11 |
| Position signaling switch COM PSS (for withdrawable breaker only) | 3VW9011-0AT12 |



| Can be used for all ETU 3-series and 6-series   |                         |               |
|---|-------------------------|---------------|
| Function  | Туре                    | Article No.   |
| Test device For the trip test via ETU and tripping solenoid includi Activation of the ETU and the tripping solenoid by minto the test device On activation in the ETU 6-series, the parameters car on the display | eans of a battery built | 3VW9011-0AT32 |
| Breaker Data Adapter  • As gateway for parameterization of the ETU with SEN  • For generation of a report of the set parameters with  |                         | 3VW9011-0AT34 |
| Test devices and Breaker Data Adapters  • As gateway for parameterization of the ETU with SEN  — Testing a tripping operation using SENTRON Powe  • For use with the powerservice software                        |                         | 3VW9011-0AT33 |

- Testing of the basic protective functions LSING

- Testing of the enhanced protective functions
   Test data storage
   Readout of ETU buffer
   Generation of a report of the set parameters

#### **Accessories for connection**

| t main connec   | tions acc. to IEC 609 |   |                                     |                              |               |
|-----------------|-----------------------|---|-------------------------------------|------------------------------|---------------|
|                 | To be ordered s       | separately for top and bottom   |                                     |                              |               |
|                 | Mounting              | Version   | Mounting onto                       | Number of poles/<br>quantity | Article No.   |
|                 | Fixed-mounted         | Front main connections  |                                     | 3-pole/3 units               | 3VW9011-0AL01 |
| ng (ng          |                       |   |                                     | 4-pole/4 units               | 3VW9011-0AL02 |
|                 |                       | Extended main connections,  | Front main connections              | 3-pole/3 units               | 3VW9011-0AL77 |
|                 |                       | including insulation plate and phase barriers, standard   |                                     | 4-pole/4 units               | 3VW9011-0AL78 |
| 110             |                       | Broadened main connections,   | Front main connections, top         | 3-pole/3 units               | 3VW9011-0AL73 |
|                 |                       | including insulation plate and extended phase barriers  | Front main connections, bottom      | 3-pole/3 units               | 3VW9011-0AL75 |
|                 |                       |   | Front main connections, top, bottom | 4-pole/4 units               | 3VW9011-0AL74 |
| 0000            | Withdrawable          | Front-accessible main connections   | Flange of the guide frame           | 3-pole/3 units               | 3VW9011-0AN01 |
|                 |                       |   |                                     | 4-pole/4 units               | 3VW9011-0AN02 |
| ***             |                       | Broadened main connections  | Front-accessible main               | 3-pole/3 units               | 3VW9011-0AN73 |
| 3 50            |                       |   | connections                         | 4-pole/4 units               | 3VW9011-0AN74 |
| main connect    | ions acc. to IEC 6094 |   |                                     |                              |               |
|                 |                       | separately for top and bottom   |                                     |                              |               |
|                 | Mounting              | Version   | Mounting onto                       | Number of poles/<br>quantity | Article No.   |
|                 | Fixed-mounted         | Rear main connections, rotatable for  |                                     | 3-pole/3 units               | 3VW9011-0AL32 |
|                 |                       | horizontal/vertical connection, including terminal cover  |                                     | 4-pole/4 units               | 3VW9011-0AL33 |
| 44 94           | Withdrawable          | Rear main connections, rotatable for  |                                     | 3-pole/3 units               | 3VW9011-0AN32 |
|                 |                       | horizontal/vertical connection, including terminal cover  |                                     | 4-pole/4 units               | 3VW9011-0AN33 |
|                 |                       | Broadened main connections  | Rear horizontal main                | 3-pole/3 units               | 3VW9011-0AN75 |
|                 |                       |   | connections                         | 4-pole/4 units               | 3VW9011-0AN76 |
| l cable connec  |                       |   |                                     |                              |               |
|                 | To be ordered s       | separately for top and bottom   |                                     |                              |               |
|                 | Mounting              | Version   | Mounting onto                       | Number of poles/<br>quantity | Article No.   |
|                 | Fixed-mounted         | Circular conductor terminals 4 × 240 mm <sup>2</sup>  | Front main connections              | 3-pole/3 units               | 3VW9011-0AL71 |
| 00 00           |                       | for front cable connection <sup>1)</sup> , including insulation plate and high, extended terminal cover |                                     | 4-pole/4 units               | 3VW9011-0AL72 |
| A. A            | Withdrawable          | Set of circular conductor connection  | Rear vertical main                  | 3-pole/3 units               | 3VW9011-0AN71 |
| 13 13           |                       | pieces 4 × 240 mm² for cable lugs for rear<br>cable connection  | connections                         | 4-pole/4 units               | 3VW9011-0AN72 |
| liary supply co | nnectors in push-in   | version   |                                     |                              |               |
| 100             |                       | p in push-in version for upgrading fixed-moun<br>lways fitted at the factory with the exact numb        |                                     |                              |               |
|                 | Version               |   |                                     |                              | Article No.   |
|                 | Push-in               |   |                                     |                              | 3VW9011-0AB11 |

 $<sup>^{1)}\,</sup>$  For connecting Al cables up to 1000 A

#### **Accessories for connection**

#### Terminal covers for fixed-mounted circuit breakers • Finger-proof for front main connection for fixed-mounted versions · Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately. Number of poles/quantity Standard 3-pole/2 units 3VW9723-0WD30 4-pole/2 units 3VW9724-0WD40 Extended 3-pole/2 units 3VW9723-0WF30 4-pole/2 units 3VW9724-0WF40 Phase barriers for fixed-mounted circuit breakers • Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately. For operational voltages > 440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional. Number of poles/quantity Article No. 100 mm 3-pole/4 units 3VW9723-0WA00 (standard) 4-pole/6 units 3VW9724-0WA10 200 mm 3-pole/4 units 3VW9723-0WA01 (extended) 4-pole/6 units 3VW9724-0WA11 Support for floor mounting of fixed-mounted circuit breakers • For fixed-mounted versions Mounting support standard 3VW9011-0BB51 (circuit breaker feet) (= Z option A07) Mounting support extended • Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) 3VW9011-0BB52 • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) (circuit breaker feet), including mechanical Locking mechanism for control cabinet door, Bowden cable transmission of switch (for 3VW9011-0BB16) position on circuit breaker Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21) side panel (= Z option S56) Extension kits for modification of the side wall of the fixed-mounted circuit breaker · For fixed-mounted versions · Rear wall fixing on mounting plate • For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57) Version Article No. Extension kit for side wall • Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) 3VW9011-0BB53 • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10)

Locking mechanism for control cabinet door, Bowden cable

Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)

(for 3VW9011-0BB16)

#### Motor

#### Spring charging motor (MO) Article No. For automatic charging of the 24 ... 30 V AC/DC 3VW9011-0AF01 stored energy mechanism 48 ... 60 V AC/DC 3VW9011-0AF02 3VW9011-0AF03 100 ... 130 V AC/DC 220 ... 250 V AC/DC 3VW9011-0AF04 Mechanical operating cycles counters MOC Article No. In combination with a spring 5 digits 3VW9011-0AH07 charging motor

#### Auxiliary releases, closing coils

#### Closing coils CC/shunt trips ST 24 V AC/DC 3VW9011-0AD01 3VW9011-0AD02 30 V AC/DC 48 V AC/DC 3VW9011-0AD03 60 V AC/DC 3VW9011-0AD04 110 ... 120 V AC/DC 3VW9011-0AD05 120 ... 127 V AC/DC 3VW9011-0AD06 220 ... 240 V AC/DC 3VW9011-0AD07 240 ... 250 V AC/DC 3VW9011-0AD08 380 ... 400 V AC 3VW9011-0AD17 3VW9011-0AD18 415 ... 440 V AC TD320 function test units for closing coils/shunt trips



- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested.
- The operational availability test is performed cyclically at intervals of 30 seconds.
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
  - LED POWER ON LIT: Correct function of the YO/YC test device
  - LED DEACTIVATION LIT: Power supply failure, wire break
  - LED SHORT-CIRCUIT LIT: Winding short-circuit
  - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
  - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil/shunt trips OK

| Version                           | Article No.   |
|-----------------------------------|---------------|
| For all closing coils/shunt trips | 3VW9011-0AT31 |

#### Auxiliary releases, closing coils

#### Auxiliary/signaling switches



- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load above 1 mA at 5 V DC, and
  - a maximum breaking capacity of 100 mA at 24 V DC.
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted circuit breakers a 3VW9011-0BB5x side wall modification

| Туре                                 | Contacts   | Article No.   |
|--------------------------------------|--|---------------|
| Ready-to-close signal RTC            | 1 CO standard  | 3VW9011-0AH01 |
|                                      | 1 CO digital   | 3VW9011-0AH02 |
| Auxiliary switch ON/OFF AUX          | 4 CO standard  | 3VW9011-0AG01 |
|                                      | 4 CO digital   | 3VW9011-0AG02 |
|                                      | 2 CO standard + 2 CO digital   | 3VW9011-0AG03 |
| External auxiliary switch ON/OFF AUX | 15 CO standard   | 3VW9011-0AG05 |
|                                      | 15 CO digital  | 3VW9011-0AG06 |
| Tripped signaling switch S24         | 1 CO standard  | 3VW9011-0AH14 |
|                                      | 1 CO digital   | 3VW9011-0AH15 |
| Spring charge signaling switch S21   | 1 CO standard  | 3VW9011-0AH10 |
|                                      | 1 CO digital   | 3VW9011-0AH08 |
| Position signaling switch PSS        | 2 CO   2 CO   2 CO   | 3VW9011-0AH11 |
| (for withdrawable devices)           | (connected   test   disconnected position) standard                      |               |
|                                      | 2 CO   2 CO   2 CO<br>(connected   test   disconnected position) digital | 3VW9011-0AH12 |

#### Fixing for external auxiliary switches AUX 15 CO



• External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

| Version  | Article No.   |
|--|---------------|
| For fixed-mounted circuit breakers with rear panel or floor mounting (in combination with Z option S56 or S57) | 3VW9011-0AG15 |
| For guide frames   | 3VW9011-0AG17 |

#### Undervoltage releases UVR



| VK.             |               |  |
|-----------------|---------------|--|
| Voltage         | Article No.   |  |
| 24 V AC/DC      | 3VW9011-0AE01 |  |
| 30 V AC/DC      | 3VW9011-0AE02 |  |
| 48 V AC/DC      | 3VW9011-0AE03 |  |
| 60 V AC/DC      | 3VW9011-0AE04 |  |
| 110 120 V AC/DC | 3VW9011-0AE05 |  |
| 120 127 V AC/DC | 3VW9011-0AE06 |  |
| 220 240 V AC/DC | 3VW9011-0AE07 |  |
| 240 250 V AC/DC | 3VW9011-0AE08 |  |
| 380 400 V AC    | 3VW9011-0AE17 |  |
| 415 440 V AC    | 3VW9011-0AE18 |  |

#### External time-delay devices for undervoltage release

- With adjustable delay time from 0.5 to 3 s.Suitable for mounting onto DIN rail.



| Voltage         | Article No.   |
|-----------------|---------------|
| 24 30 V AC/DC   | 3VW9011-0AE10 |
| 48 V AC/DC      | 3VW9011-0AE11 |
| 60 V AC/DC      | 3VW9011-0AE15 |
| 110 127 V AC/DC | 3VW9011-0AE12 |
| 220 250 V AC/DC | 3VW9011-0AE13 |

#### Interlocking

#### Locking provision to prevent movement of the withdrawable circuit breaker Article No. RONIS cylinder lock (spare part for R78) 3VW9011-0BA80 Padlock 8 mm (spare part for R65), for no more than 3 padlocks 3VW9011-0BA87 ocking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87) Article No. 3VW9011-0BA84 Locking mechanism (spare part for R79) Locking provisions in OFF position • For fixed-mounted and withdrawable versions • Against unauthorized closing in the operator panel (safe OFF) • The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1 Article No. Cylinder lock, made by RONIS (spare part for S08) 3VW9011-0BA33 Locking provisions in OFF position · For fixed-mounted and withdrawable versions Against unauthorized closing in the operator panel (safe OFF) • The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1 Article No. Padlock 4 mm (spare part for S22) Plastic for no more than 3 locks 3VW9011-0BA41 Padlock 7 mm (spare part for S23) Metal for no more than 1 lock 3VW9011-0BA42 Padlock 8 mm (spare part for S07) Metal for no more than 2 locks 3VW9011-0BA44 nterlocking sets for mechanical Open and/or Close on the operator panel Article No. Padlock 4 mm (spare part for S42) Plastic for no more than 3 locks 3VW9011-0BA22 Padlock 7 mm (spare part for S43) Metal for no more than 1 lock 3VW9011-0BA23 Padlock 8 mm (spare part for S44) Metal for no more than 2 locks 3VW9011-0BA24 Protective covers for mechanical Open/Close • Mechanical Open/Close to protect against unintentional actuation on the operator panel. • Not lockable Article No. Not lockable (spare part for S41) 3VW9011-0BA21 Mechanical interlocks • Mechanical interlock for 3WL10/3VA27 with Bowden cable 2 m • For fixed-mounted versions, an additional support 3VW9011-0BB52 (option S56) or extension kit 3VW9011-0BB53 (option S57) must be ordered Article No. Fixed-mounted Rear panel or floor mounting 3VW9011-0BB21 Withdrawable 3VW9011-0BB22 Mounting onto guide frame Bowden cable, separate • One required for each circuit breaker Type

3VW9011-0BB23

3WL9111-0BB45-0AA0

3WL9111-0BB46-0AA0

1000 mm

2000 mm

3000 mm

3VW9011-0BB18

#### Interlocking

#### Locking mechanisms for control cabinet door To prevent opening of the control cabinet door in ON position It additionally prevents the circuit breaker from being closed when the control cabinet door is open. Fixed-mounted onto side panel or floor Direct fixed interlocking 3VW9011-0BB10 Locking with Bowden cable 3VW9011-0BB16 Withdrawable Direct fixed interlocking 3VW9011-0BB14

#### Door sealing frame IP30



• For IP4x and higher, you must order the protective cover IP54 3VW9011-0AP03 or 3VW9011-0AP13.

| Description                  | Mounting      | Version | Article No.   |
|------------------------------|---------------|---------|---------------|
| Spare part for Z option T30. | Fixed-mounted | IP3x    | 3VW9011-0AP01 |
|                              | Withdrawable  | IP3x    | 3VW9011-0AP02 |


Locking with Bowden cable

#### Protective covers IP54



- Protective cover/hood IP54 lockable for fixed-mounted breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door.
   Cannot be combined with IP30 door sealing frame and door mounted rotary operator

| Description            | Version | Article No.   |
|------------------------|---------|---------------|
| Lock with unique key   | IP54    | 3VW9011-0AP03 |
| Lock with standard key | IP54    | 3VW9011-0AP13 |

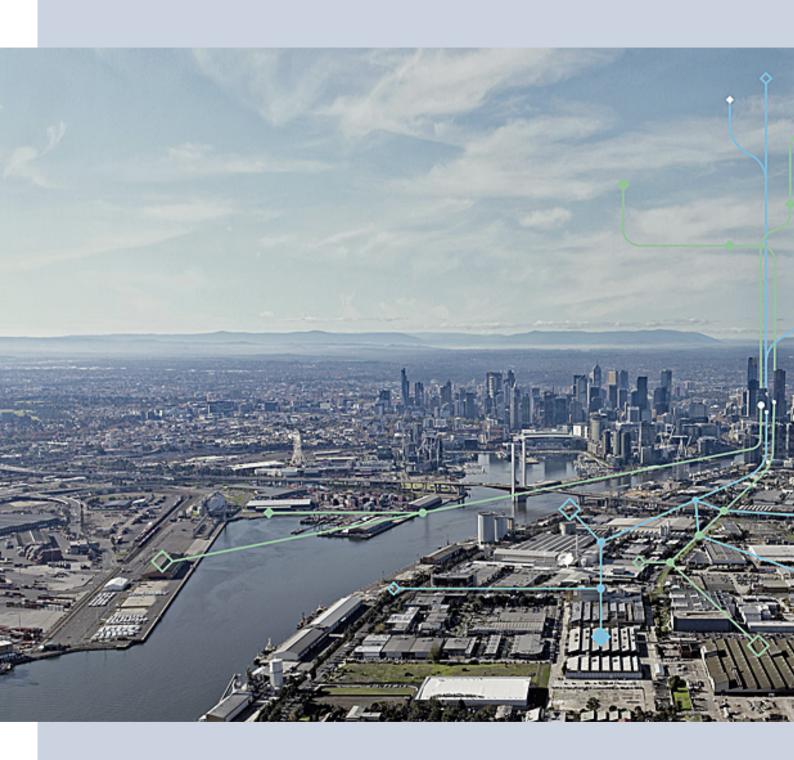

A/2

A/4



#### Λ

### Conditions of sale and delivery

#### 1. General Provisions

By using this catalog you can purchase hard- and software products as well as services (together hereinafter referred to as "products") described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Note, for products purchased from any Siemens entity having a registered office outside of Germany, the respective terms and conditions of sale and delivery of the respective Siemens entity apply exclusively. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

### 1.1 For customers with a seat or registered office in European Union

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the text of the product description, these specific terms and conditions shall apply and subordinate thereto,
- for stand-alone software products and software products forming a part of a product or project, the "General Conditions for Software Products for Infrastructure & Industry Business (German law)"
   <sup>11</sup> and/or
- for consulting services the "Allgemeine Geschäftsbedingungen für Beratungsleistungen für Infrastructure & Industry Geschäft (Deutsches Recht)"<sup>1)</sup> (available only in German) and/or
- for other services, the "Supplementary Terms and Conditions for Services for Infrastructure & Industry Business (German Law) ("BL")"1) and/or
- for other products the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>.

In case such products should contain Open Source Software, the conditions of which shall prevail over the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>, the Product will be given a note as to which special conditions apply to this open source software. This shall apply mutatis mutandis for notices referring to other third-party software components.

### 1.2 For customers with a seat or registered office outside European Union

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C.

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the "Standard Terms and Conditions for Consulting Services for Infrastructure & Industry Business (Swiss Law)"
   <sup>11</sup> and/or
- for other services the "International Terms & Conditions for Services"
   <sup>(1)</sup> supplemented by "Software Licensing Conditions"
   and/or
- for other products the "International Terms & Conditions for Products"<sup>1)</sup> supplemented by "Software Licensing Conditions"<sup>1)</sup>

#### 1.3 For customers with master or framework agreement

To the extent products offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

#### 2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

<sup>1)</sup> The text of the Terms and Conditions of Siemens AG can be downloaded at https://mall.industry.siemens.com/legal/ww/en/terms\_of\_trade\_en.pdf

#### Α

#### 3. Export Control and Sanctions Compliance

#### 3.1 General

Customer shall comply with all applicable sanctions, embargoes and (re-)export control laws and regulations, and, in any event, with those of the European Union, the United States of America and any locally applicable jurisdiction (collectively "Export Regulations").

#### 3.2 Checks for Products

Prior to any transaction by customer concerning products (including hardware, documentation and technology) delivered by Siemens, or products (including maintenance and technical support) performed by Siemens with a third party, customer shall check and certify by appropriate measures that

- (i) the customer's use, transfer, or distribution of such products, the brokering of contracts or the provision of other economic resources in connection with products will not be in violation of any Export Regulations, also taking into account any prohibitions to circumvent these (e.g., by undue diversion)
- (ii) the products are not intended or provided for prohibited or unauthorized non-civilian purposes (e.g. armaments, nuclear technology, weapons, or any other usage in the field of defense and military);
- (iii) customer has screened all direct and indirect parties involved in the receipt, use, transfer, or distribution of the products against all applicable restricted party lists of the Export Regulations concerning trading with entities, persons and organizations listed therein and
- (iv) products within the scope of items-related restrictions, as specified in the respective annexes to the Export Regulations, will not, unless permitted by the Export Regulations, be

   (a) exported, directly or indirectly (e.g., via Eurasian Economic Union (EAEU) countries), to Russia or Belarus, or
   (b) resold to any third party business partner that does not take a prior commitment not to export such products to Russia or Belarus.

#### 3.3 Non-Acceptable Use of Software and Cloud Services

Customer shall not, unless permitted by the Export Regulations or respective governmental licenses or approvals,

- (i) download, install, access or use the products from or in any location prohibited by or subject to comprehensive sanctions or subject or to license requirements according to the Export Regulations;
- (ii) grant access to, transfer, (re-)export (including any "deemed (re-)exports"), or otherwise make available the products to any entity, person, or organization identified on a restricted party list of the Export Regulations;
- (iii) use the products for any purpose prohibited by the Export Regulations (e.g. use in connection with armaments, nuclear technology or weapons);

- (iv) upload to a products platform any customer content unless it is non-controlled (e.g. in the EU: AL = N; in the U.S.: ECCN = N or EAR99);
- (v) facilitate any of the afore mentioned activities by any user. Customer shall provide all users with all information necessary to ensure compliance with the Export Regulations.

#### 3.4 Semiconductor Development

Customer will not, without advance written authorization from Siemens, use offerings for the development or production of integrated circuits at any semiconductor fabrication facility located in China meeting the criteria specified in the U.S. Export Administration Regulations, 15 C.F.R. 744.23.

#### 3.5 Information

Upon request by Siemens, customer shall promptly provide Siemens with all information pertaining to users, the intended use and the location of use or the final destination (in the case of hardware, documentation and technology) of the products. Customer will notify Siemens prior to customer disclosing any information to Siemens that is defense-related or requires controlled or special data handling pursuant to applicable government regulations, and will use the disclosure tools and methods specified by Siemens.

#### 3.6 Reservation

Siemens shall not be obligated to fulfill this agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes or other sanctions. Customer acknowledges that Siemens may be obliged under the Export Regulations to limit or suspend access by customer and/or users to products.

#### 4. Miscellaneous

Errors excepted and subject to change without prior notice.

# Link directory

### Catalog LV 10

#### **General information**

| deneral information  |  |
|--|--|
| Information on low-voltage power distribution and electrical installation technology | www.siemens.com/lowvoltage                       |
| Tender specifications  | www.siemens.com/tenderspecifications             |
| Conversion tool  | www.siemens.com/conversion-tool                  |
| Image database   | www.siemens.com/lowvoltage/picturedb             |
| CAx download manager   | www.siemens.com/cax                              |
| Newsletter system  | www.siemens.com/lowvoltage/newsletter            |
| Siemens YouTube channel  | www.youtube.com/Siemens                          |
| Catalog LV 10  | www.siemens.com/lv10                             |
| Catalog LV 13  | www.siemens.com/lv13                             |
| Catalog LV 18  | www.siemens.com/lv18                             |
| Brochures/catalogs   | www.siemens.com/lowvoltage/catalogs              |
| Operating instructions/manuals   | www.siemens.com/lowvoltage/manuals               |
| SiePortal  | www.siemens.com/sieportal                        |
| SiePortal (knowledge base)   | www.siemens.com/lowvoltage/product-support       |
| SiePortal (product catalog)  | www.siemens.com/lowvoltage/product-catalog       |
| Online Support App   | www.siemens.com/support-app                      |
| My Documentation Manager (MDM)   | www.siemens.com/lowvoltage/mdm                   |
| Configurators  | www.siemens.com/lowvoltage/configurators         |
| Direct forwarding to SiePortal   | www.siemens.com/product_catalog_SIEP?Article No. |
| Training   | www.siemens.com/sitrain-lowvoltage               |
| Local contacts   | www.siemens.com/lowvoltage/contact               |
| Local contacts   | www.siemens.com/lowvoltage/components/contact    |
|  | www.siemens.com/lowvoltage/systems/contact       |
|  | www.siemens.com/lowvoltage/software/contact      |
| Technical Support  | www.siemens.com/support-request                  |
| Information on services  | www.siemens.com/service-offers                   |
| Control panels for the North American market   | www.siemens.com/northamerican-standards          |
| Integrated Control Panels  | www.siemens.com/controlpanel                     |
| Smart Control Panel Design   | www.siemens.com/controlpanel/cpd                 |
| Energy savings and amortization  | www.automation.siemens.com/sinasave              |
| SIMATIC Energy Suite   | www.siemens.com/energysuite                      |
| SITOP power supplies   | www.siemens.com/sitop                            |
| Power distribution with Totally Integrated Power                                     | www.siemens.com/tip                              |
| TIA Selection Tool   | www.siemens.com/tst                              |
| Electrical Product Finder  | www.siemens.com/electrical-product-finder        |
| Sustainability   | www.siemens.com/sustainability                   |
| Siemens EcoTech  | www.siemens.com/SiemensEcoTech                   |
|  | www.siemens.com/lowvoltage/SiemensEcoTech        |
| SENTRON product phase-out  | www.siemens.com/info-sentron                     |
|  |  |

### Catalogs and further information



LV 10 Low-Voltage Power Distribution and Electrical Installation Technology SENTRON • SIVACON • ALPHA PDF (E86060-K8280-A101-B9-7600)



Switches and Socket Outlets
DELTA
PDF (SIEP-C10409-00-7600)



LV 13 3WA Air Circuit Breakers SENTRON PDF (E86060-K8280-B101-A4-7600)



**SiePortal** Information and Ordering Platform on the Internet:

sieportal.siemens.com



LV 18 Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification SENTRON

PDF (E86060-K8280-E347-B2-7600)



SITRAIN
Digital Industry Academy
www.siemens.com/sitrain



Industrial Controls SIRIUS PDF (E86060-K1010-A101-B7-7600)



**Siemens TIA Selection Tool** for the selection, configuration and ordering of TIA products and devices

www.siemens.com/tst

IC 10

#### Cybersecurity information

Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry.

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under www.siemens.com/cert.

#### Get more information

www.siemens.com/lowvoltage

Published by Siemens AG

Smart Infrastructure Electrical Products Siemensstraße 10 93055 Regensburg, Germany

For the U.S. published by Siemens Industry Inc.

3617 Parkway Lane Peachtree Corners, GA 30092 United States

PDF (Catalog Extract E86060-K8280-A101-B9-7600) KG 1224 148 En Produced in Germany © Siemens 2024 Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.