


Surge suppressor for 3MT7 contactors 06-95A suitable for coil voltage 110-240VAC, 50/60Hz RC Element



product brand name			SINOVA		
product designation			surge suppressor		
General technical data					
size of contactor			0 to 4		
Substance Prohibittance (Date)			07/01/2022		
Weight			0.026 kg		
ambient temperature during storage			-25 ... +70 °C		
Control circuit/ Control					
type of voltage of the control supply voltage			AC		
control supply voltage 1 at AC			110 ... 240 V		
• at 50 Hz					
• at 60 Hz			110 ... 240 V		
control supply voltage frequency			50 Hz		
• 1 rated value					
• 2 rated value			60 Hz		
design of the surge suppressor			with RC elements		
fastening method			screw fixing		
height			28.5 mm		
width			44.5 mm		
depth			25.7 mm		
Approvals Certificates					
General Product Ap- proval		Test Certificates	other		Environment

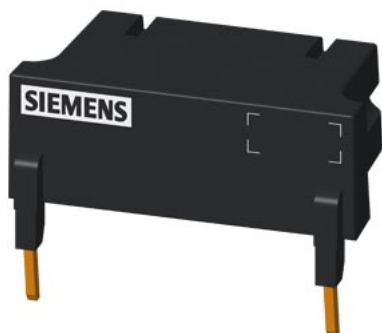

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Environmental Conformations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3MT7900-1SL21>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3MT7900-1SL21>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3MT7900-1SL21>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3MT7900-1SL21&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

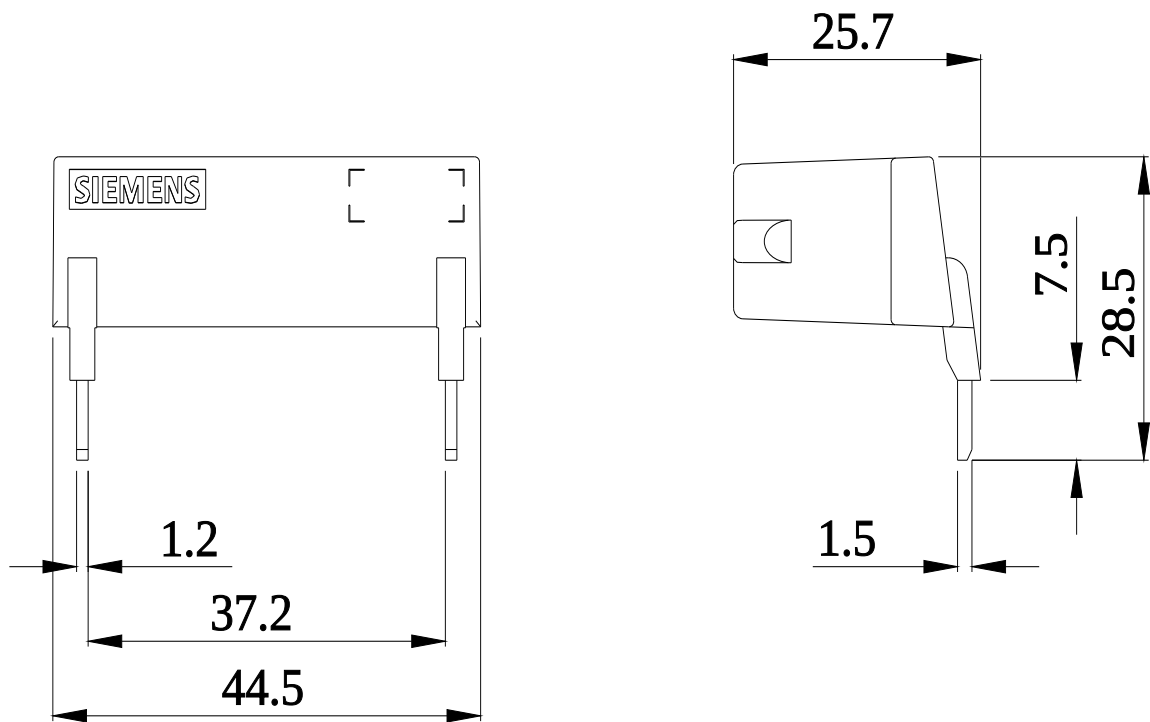

last modified:

10/12/2022 