




Terminal support for 3MU71 thermal overload relay

product brand name		SINOVA	
product designation		Terminal support	
General technical data			
size of overload relay		Size 1	
Substance Prohibittance (Date)		07/01/2022	
Weight		0.067 kg	
ambient temperature during storage		-25 ... +70 °C	
fastening method		screw and snap-on mounting onto 35 mm DIN rail	
height		75 mm	
width		45 mm	
depth		87 mm	
type of electrical connection for main current circuit		screw-type terminals	
type of connectable conductor cross-sections for main contacts finely stranded with core end processing		1x (1.5 ... 6 mm²), 2x (1.5 ... 4 mm²)	
Approvals Certificates			
General Product Ap- proval	Test Certificates	other	Environment

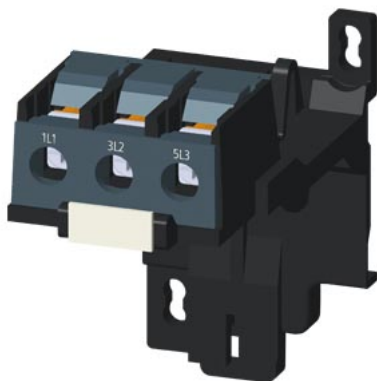


[Type Test Certi-
ficates/Test Report](#)

[Confirmation](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3MU7900-0MA10>
Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3MU7900-0MA10>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3MU7900-0MA10>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3MU7900-0MA10&lang=en
Characteristic: Tripping characteristics, I²t, Let-through current
<https://support.industry.siemens.com/cs/ww/en/ps/3MU7900-0MA10/char>
Further characteristics (e.g. electrical endurance, switching frequency)
<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3MU7900-0MA10&objecttype=14&gridview=view1>

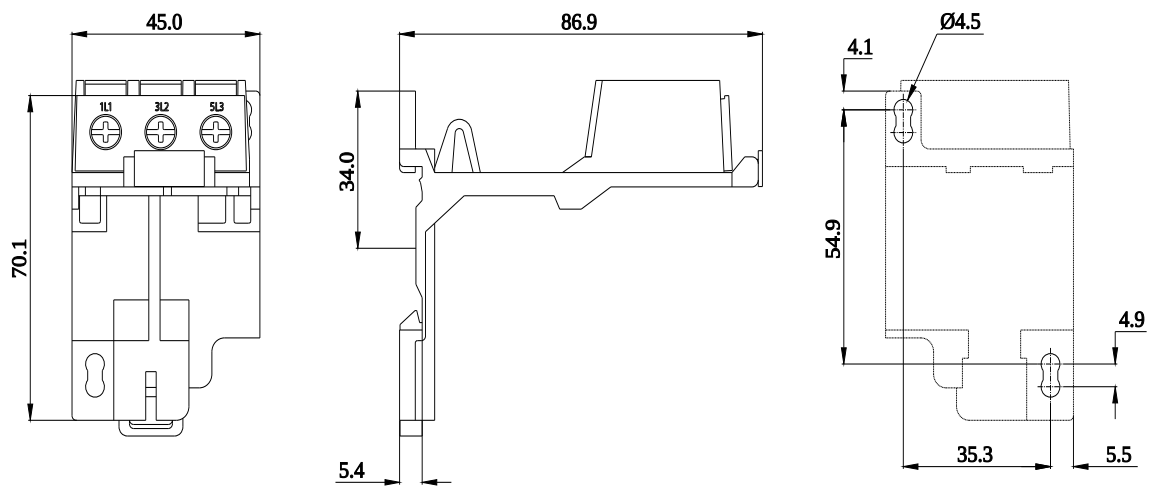

1 L1

3 L2

5 L3

