


Terminal support for 3MU72 thermal overload relay



product brand name			SINOVA		
product designation			Terminal support		
General technical data					
size of overload relay			Size 2		
Substance Prohibitance (Date)			07/01/2022		
Weight			0.094 kg		
ambient temperature during storage			-25 ... +70 °C		
fastening method			screw and snap-on mounting onto 35 mm DIN rail		
height			90 mm		
width			55 mm		
depth			97.5 mm		
type of electrical connection for main current circuit			screw-type terminals		
type of connectable conductor cross-sections for main contacts finely stranded with core end processing			1x (2.5 ... 10 mm²), 2x (2.5 ... 6 mm²)		
Approvals Certificates					
General Product Ap- proval		Test Certificates	other	Environment	

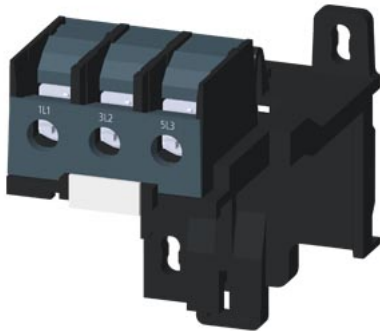

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3MU7900-0MA20>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3MU7900-0MA20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3MU7900-0MA20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3MU7900-0MA20&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3MU7900-0MA20/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3MU7900-0MA20&objecttype=14&gridview=view1>

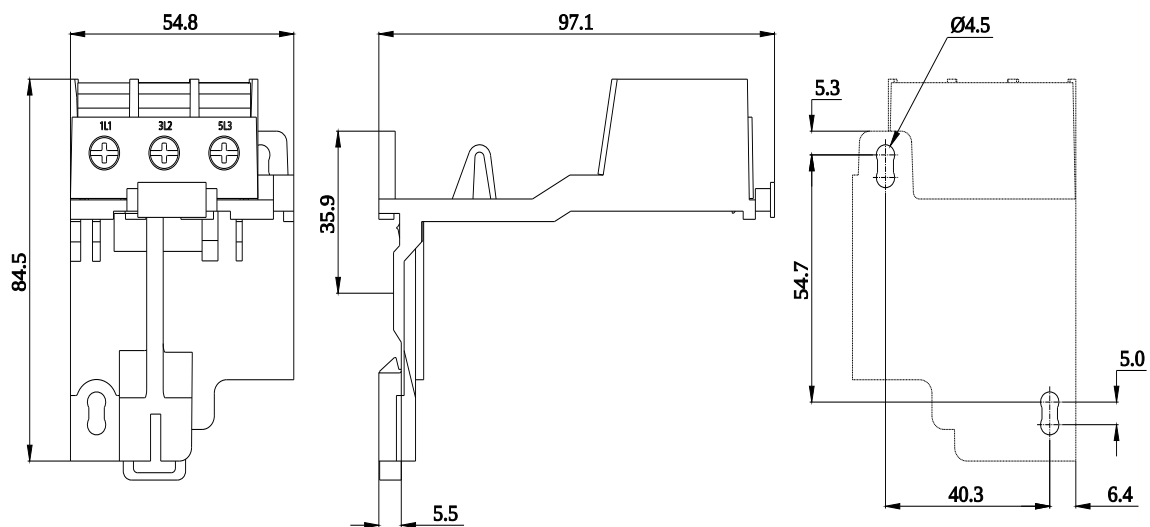

1 L1

3 L2

5 L3

