


accessory 3VJ9 IEC framesize 3VJ10 125A bus connector offset front 3 pieces

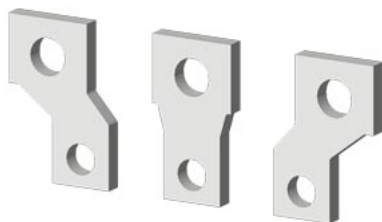

Model	
product designation	front bus connector offset
design of the product	accessory for 3VJ breaker
accessories	connection technology
Mechanical Design	
connectable conductor cross-section / for copper cable / finely stranded / with core end processing	
• minimum	2.5 mm ²
• maximum	50 mm ²
Connections according IEC	
connectable conductor cross-section / for copper cable / finely stranded / with core end processing	
• minimum	2.5 ... 50
• maximum	
type of connectable conductor cross-sections / of the laminated conductor rails	
• minimum	1 x 20 x 2
• maximum	1 x 20 x 4
width / of the busbar / maximum	20 mm
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9013-0ED00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9013-0ED00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9013-0ED00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

