



surge arrester type, 2, requirement class C, Uc 350 V, protective modules, plug-in, 4-pole, 3+1 circuit for TN-S and TT systems,

General data	
standard	IEC 61643-11: 2011, EN 61643-11: 2012
product designation	Surge protection device
<b>SPD classification according to EN 61643-11</b>	
• Test Class I, Type 1	No
• Test Class II, Type 2	Yes
• Test Class III, Type 3	No
number of SPD ports	1
design of the product	Surge arrester
design of pole	3+N/PE
designation of the protective paths	L-N, L-PE, N-PE
accessories	3 x 5SD7468-1 + 1 x 5SD7488-0
material of the enclosure	PA 6.6 / PBT
size of surge arrester	4 TE
degree of pollution	2
overvoltage category according to IEC 61010-1	III
protection class IP at connection all terminals	IP20
shock acceleration	25 gn
vibrational acceleration at 5 Hz ... 500 Hz limited to 2,5 h per axis	5 gn
relative humidity during operation	5 ... 95 %
installation altitude at height above sea level maximum	2 000 m
width	71.5 mm
height	90 mm
depth	71.5 mm
net weight	416 g
Electrical data	
type of distribution system	TT, TN-S
<b>operating voltage</b>	
• at AC	230 V
value range of the operating frequency	50 / 60 Hz
<b>continuous operating voltage</b>	
• at AC maximum	350 V
• between N and PE at AC maximum	260 V
• between L and (PE)N at AC maximum	350 V
apparent power consumption maximum	450 mVA
discharge current at (8/20) $\mu$ s	20 kA
discharge current 1 phase at (8/20) $\mu$ s maximum	40 kA
<b>follow current extinguishing capability</b>	
• between N and PE	100 A (260 V)

short-circuit rating (SCCR) at 264 V	25 kA
<b>protection level</b>	
<ul style="list-style-type: none"> <li>● between L and N maximum</li> <li>● between L and PE maximum</li> <li>● between N and L</li> <li>● between N and PE maximum</li> <li>● between PE and N and/or L</li> </ul>	<ul style="list-style-type: none"> <li>1.6 kV</li> <li>1.9 kV</li> <li>1.4 kV</li> <li>1.5 kV</li> <li>1.5 kV</li> </ul>
<b>residual voltage</b>	
<ul style="list-style-type: none"> <li>● between L and (PE)N <ul style="list-style-type: none"> <li>— at rated value of discharge current maximum</li> <li>— at 10 kA maximum</li> <li>— at 5 kA maximum</li> <li>— at 3 kA maximum</li> </ul> </li> <li>● between L and PE <ul style="list-style-type: none"> <li>— at rated value of discharge current maximum</li> <li>— at 10 kA maximum</li> <li>— at 5 kA maximum</li> <li>— at 3 kA maximum</li> </ul> </li> <li>● between N and PE <ul style="list-style-type: none"> <li>— at rated value of discharge current maximum</li> <li>— at 10 kA maximum</li> <li>— at 5 kA maximum</li> <li>— at 3 kA maximum</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>1.6 kV</li> <li>1.5 kV</li> <li>1.3 kV</li> <li>1.1 kV</li> <li>1.9 kV</li> <li>1.5 kV</li> <li>1.3 kV</li> <li>1.2 kV</li> <li>0.4 kV</li> <li>0.25 kV</li> <li>0.15 kV</li> <li>0.1 kV</li> </ul>
<b>response value of the surge voltage at 6 kV at (1.2/50) μs</b>	
<ul style="list-style-type: none"> <li>● between N and PE</li> </ul>	1.5 kV
<ul style="list-style-type: none"> <li>● response time between L and (PE)N</li> <li>● response time between N and PE</li> </ul>	<ul style="list-style-type: none"> <li>25 ns</li> <li>100 ns</li> </ul>
adjustable response factor of tripping current	1.6
fuse protection type at V-shaped connection	80 A AC (gG)
fuse protection type for T-connector	125 A AC (gG)
insulation resistance (Riso)	1 000 MΩ
<b>Connections/ Terminals</b>	
type of electrical connection	Screw terminal
stripped length	16 mm
tightening torque	4.3 ... 4.7 N·m
<b>connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>● for finely stranded conductor</li> <li>● for rigid conductor</li> <li>● finely stranded</li> </ul>	<ul style="list-style-type: none"> <li>1.5 ... 25 mm<sup>2</sup></li> <li>1.5 ... 35 mm<sup>2</sup></li> <li>0.5 ... 25 mm<sup>2</sup></li> </ul>
AWG number as coded connectable conductor cross section	15 ... 2
design of the thread of the connection screw	M5
signal design	optical
<b>Indicator/remote signaling</b>	
product component remote signaling contact	No
<b>NEMA/UL - Data</b>	
type of distribution system	TT, TN-S
<b>TOV behavior</b>	
<ul style="list-style-type: none"> <li>● at TOV test voltage (L-N)</li> <li>● at TOV test voltage (N-PE)</li> </ul>	<ul style="list-style-type: none"> <li>415 V AC (5 s / withstand mode) / 440 V AC (120 min / safe failure mode)</li> <li>1200 V (200 ms / withstand mode)</li> </ul>
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>● during operation</li> <li>● during storage</li> </ul>	<ul style="list-style-type: none"> <li>-40 ... +80 °C</li> <li>-40 ... +80 °C</li> </ul>
combustibility class according to UL 94	V-0
<b>Approvals Certificates</b>	
<b>General Product Approval</b>	<b>other</b>



[Confirmation](#)

[Miscellaneous](#)

## Environment

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD7464-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/5SD7464-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SD7464-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7464-0)

CAX-Online-Generator

<http://www.siemens.com/cax>

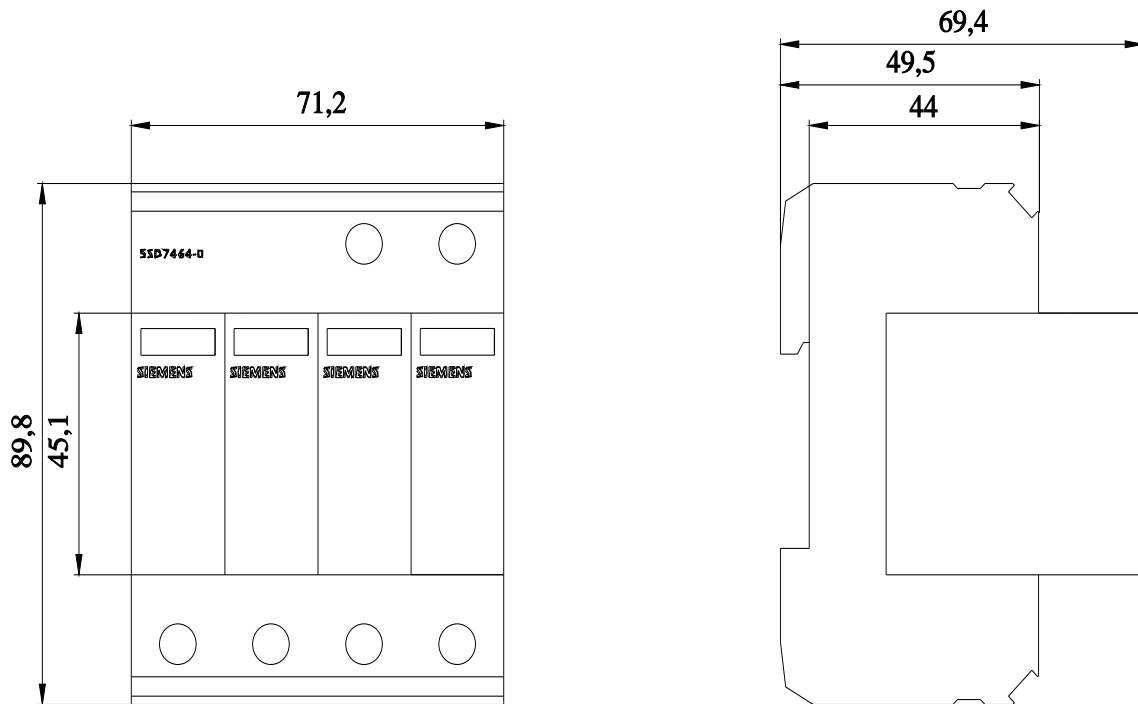

last modified:

4/8/2025

