



SINOVA, Miniature Circuit Breaker 240/415V 10kA, 1-pole C, 63 A

Model	
product brand name	SINOVA
General technical data	
number of poles	1
design of pole	1P
tripping characteristic class	C
overvoltage category	III
degree of pollution	2
operational current at AC rated value	63 A
Supply voltage	
value range of the supply voltage frequency	50/60 Hz
value range of the supply voltage at AC	240/415 V
protection class IP	IP20, with connected conductors
switching capacity current	
• according to EN 60898 rated value	10 kA
power loss [W]	
• for rated value of the current at AC in hot operating state per pole	7 W
• maximum	7 W
product feature silicon-free	Yes
product extension installable supplementary devices	No
connectable conductor cross-section solid	
• minimum	1 mm <sup>2</sup>
• maximum	35 mm <sup>2</sup>
connectable conductor cross-section stranded	
• minimum	1 mm <sup>2</sup>
• maximum	35 mm <sup>2</sup>
tightening torque with screw-type terminals	
• minimum	2 N·m
• maximum	2 N·m
position of power supply cord	Any
height	84 mm
width	18 mm
depth	76 mm
installation depth	70 mm
number of modular width units	1
fastening method	DIN rail
mounting position	any
net weight	110 g
ambient temperature during operation	

<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	-25 °C 55 °C
<b>ambient temperature during storage</b> <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	-40 °C 75 °C
<b>reference code according to IEC 81346-2</b>	F

**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TJ4163-7>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5TJ4163-7>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TJ4163-7](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TJ4163-7)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

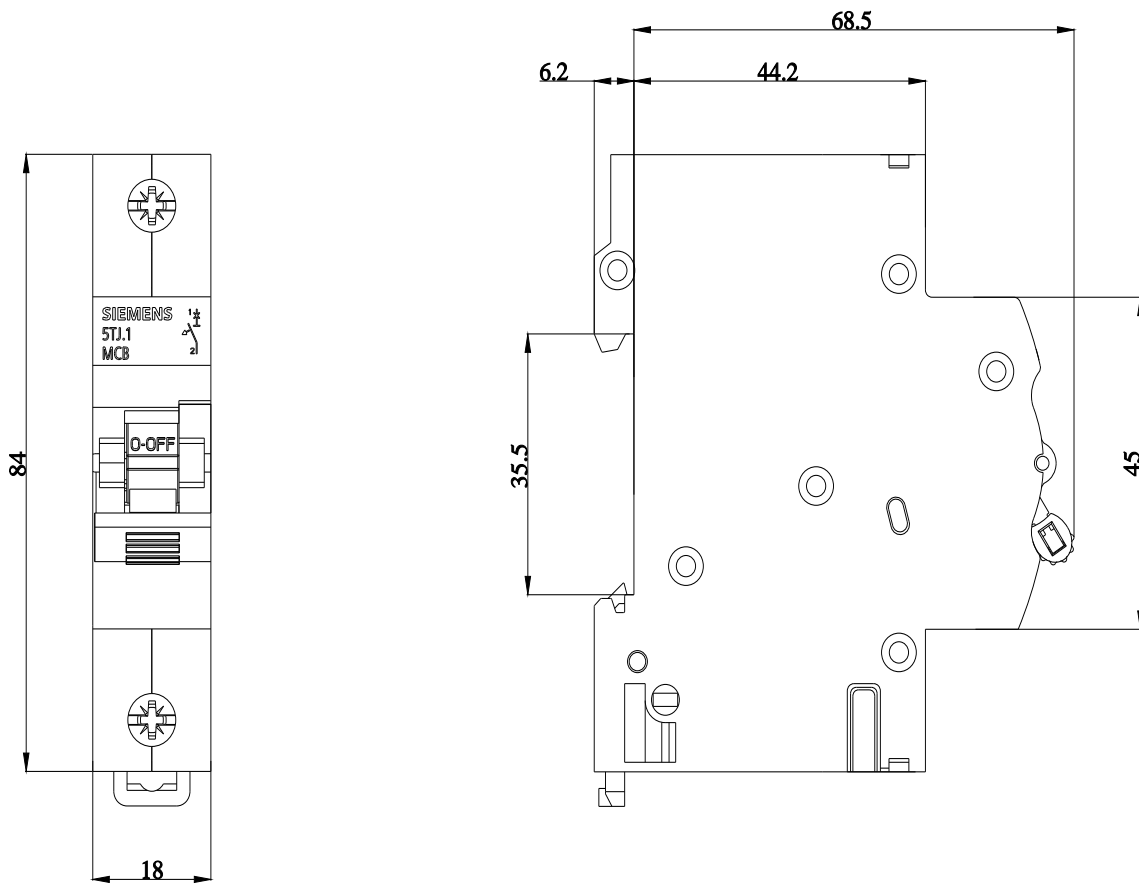

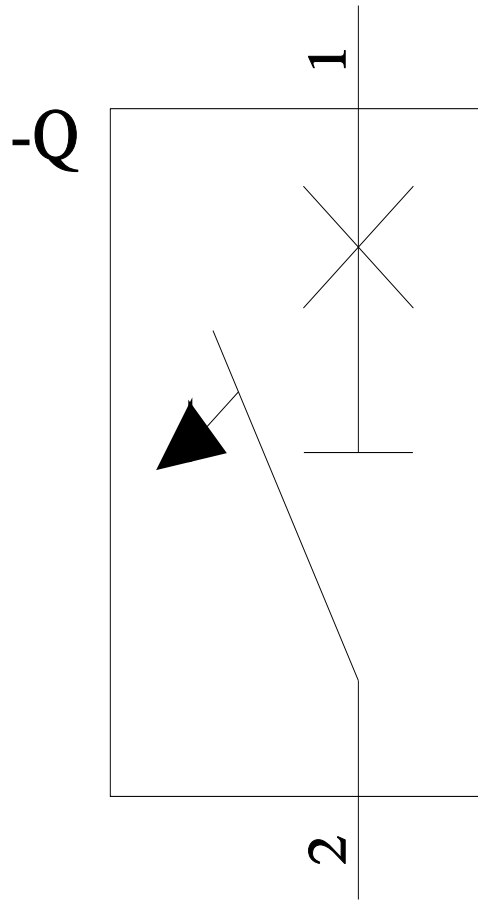

---

last modified:

4/19/2024 

