

Switch disconnecter 63A 3 pole

Model	
design of the switching function	on-off switch
General technical data	
number of poles	3
short-circuit current rating	10 kA
type of voltage of the operating voltage	AC
Supply voltage	
operating voltage rated value	415 V
value range of the operating frequency	60
Protection class	
protection class IP	other
Main circuit	
operational current rated value	63 A
Product details	
product component signal lamp	No
number of NO contacts	3
Product function	
product function positive opening (acc. to DIN VDE 0113)	No
connectable conductor cross-section for flexible conductor with core end processing	
• minimum	4 mm ²
• maximum	35 mm ²
connectable conductor cross-section for rigid conductor	
• minimum	4 mm ²
• maximum	35 mm ²
tightening torque with screw-type terminals	
• minimum	2 N·m
• maximum	2 N·m
Mechanical Design	
height	84 mm
depth	72.5 mm
installation depth	76.4 mm
number of modular width units	3
Net Weight	0.25 kg
ambient temperature during operation	
• minimum	-5 °C
• maximum	55 °C
ambient temperature during storage minimum	-25 °C
Approvals Certificates	
General Product Ap-	Test Certificates
other	Environment



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TE3363-0RC>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TE3363-0RC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE3363-0RC


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

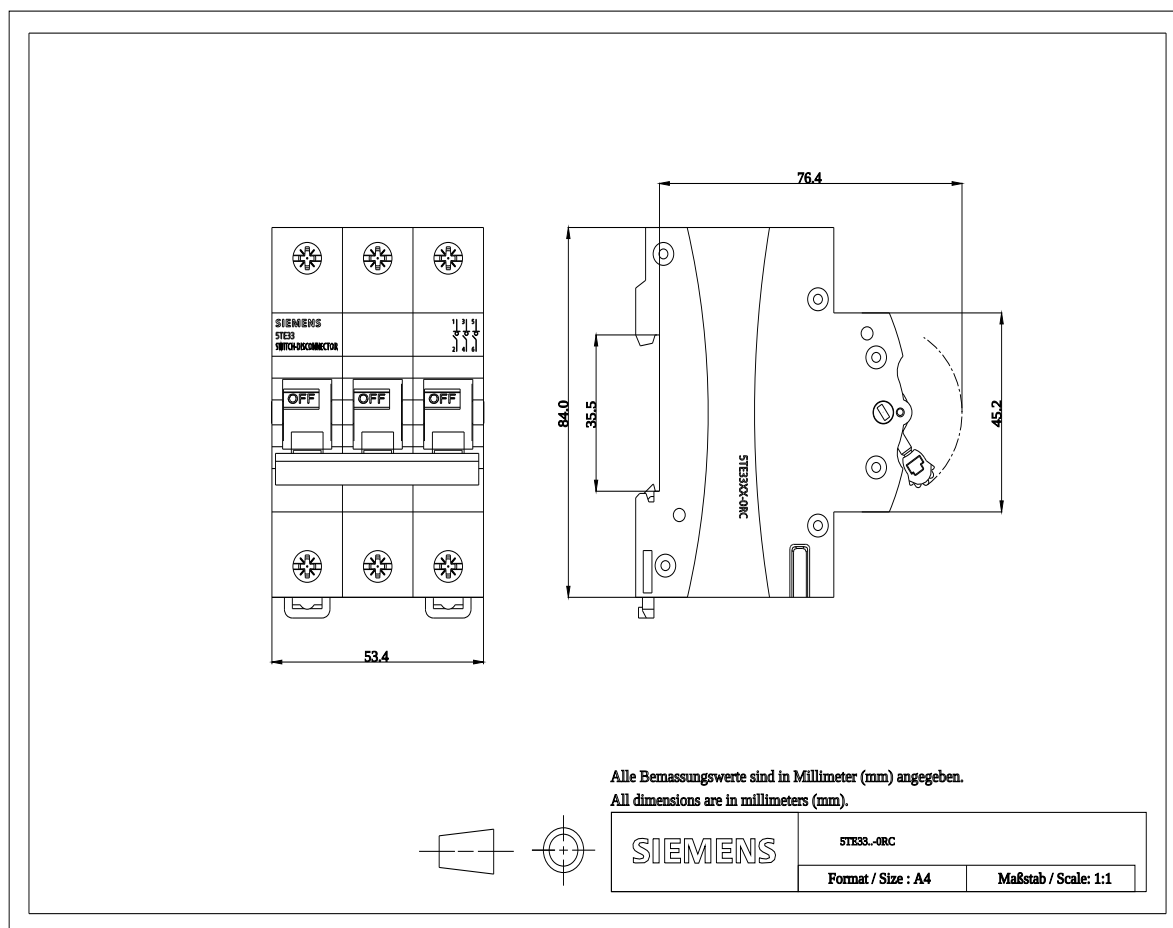

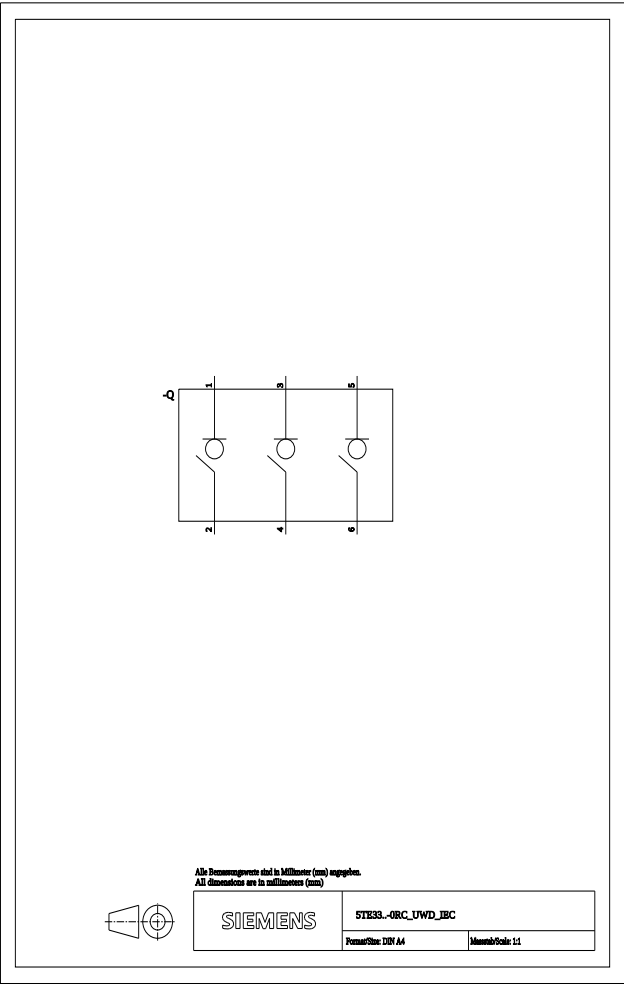

last modified: 7/10/2025 

