



analog adjustment monitoring relay phase failure, phase sequence, asymmetry and under-voltage monitoring 3x 160-690 V AC, 15-70 Hz 2 changeover contacts screw terminal

product brand name	SIRIUS
product designation	Network monitoring relay with analog setting
design of the product	monitoring of phase sequence, phase failure, phase asymmetry, and undervoltage
product type designation	3UG5
<b>General technical data</b>	
product function	line monitoring
display version LED	Yes
design of the display	LED
power loss [W] maximum	1.8 W
power loss [V·A] maximum	5.1 VA
insulation voltage for overvoltage category III according to IEC 60664	
• with degree of pollution 2 rated value	690 V
• with degree of pollution 3 rated value	690 V
degree of pollution	3
type of voltage	
• for monitoring	AC
• of the operating voltage for actuation	AC/DC
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance according to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
switching behavior	monostable
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
relative repeat accuracy	0.4 %
Substance Prohibitance (Date)	06/01/2023
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
Weight	170 g
<b>Product Function</b>	
product function	
• undervoltage detection	Yes
• overvoltage detection	No
• phase sequence recognition	Yes
• phase failure detection	Yes
• asymmetry detection	Yes
• overvoltage detection 3 phase	No

<ul style="list-style-type: none"> <li>• undervoltage detection 3 phases</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• voltage window recognition 3 phase</li> </ul>	No
<ul style="list-style-type: none"> <li>• adjustable open/closed-circuit current principle</li> </ul>	No
<ul style="list-style-type: none"> <li>• auto-RESET</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• neutral conductor monitoring adjustable</li> </ul>	No
suitability for use safety-related circuits	No
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>	200 ... 690 V
<ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>	200 ... 690 V
<b>control supply voltage 1 at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>	200 ... 690 V
<ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>	200 ... 690 V
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85
<ul style="list-style-type: none"> <li>• full-scale value</li> </ul>	1.1
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85
<ul style="list-style-type: none"> <li>• full-scale value</li> </ul>	1.1
<b>Supply voltage</b>	
supply voltage frequency rated value	70 ... 15 Hz
<b>Interfaces</b>	
design of the interface bluetooth	No
<b>Measuring circuit</b>	
<b>measurable voltage at AC</b>	160 ... 760 V
<b>adjustable operating delay time initial value</b>	0.1 s
<b>adjustable response delay time</b>	
<ul style="list-style-type: none"> <li>• with lower or upper limit violation</li> </ul>	0.1 ... 20 s
<b>buffering time in the event of power failure minimum</b>	20 ms
<b>response time maximum</b>	500 ms
<b>relative temperature-related measurement deviation</b>	1 %
<b>Precision</b>	
<b>relative metering precision</b>	5 %
<b>temperature drift per °C</b>	0.003 %/°C
<b>Short-circuit protection</b>	
<b>design of the fuse link</b>	
<ul style="list-style-type: none"> <li>• for short-circuit protection of the NO contacts of the relay outputs required</li> </ul>	gL/gG: 6 A or MCB type C: 1 A
<ul style="list-style-type: none"> <li>• for short circuit protection of the NC contacts of the relay outputs required</li> </ul>	gL/gG: 6 A or MCB type C: 1 A
<b>Communication/ Protocol</b>	
protocol is supported IO-Link protocol	No
<b>type of voltage supply via input/output link master</b>	No
<b>Auxiliary circuit</b>	
<b>material of switching contacts</b>	AgSnO2
number of NC contacts delayed switching	0
number of NO contacts delayed switching	0
<b>number of CO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	2
<ul style="list-style-type: none"> <li>• delayed switching</li> </ul>	2
<b>operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>contact reliability of auxiliary contacts</b>	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
<b>contact rating of auxiliary contacts according to UL</b>	R300 / B300
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>ampacity of the output relay at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 250 V at 50/60 Hz</li> </ul>	3 A
<ul style="list-style-type: none"> <li>• at 400 V at 50/60 Hz</li> </ul>	3 A

<b>ampacity of the output relay at DC-13</b>	
<ul style="list-style-type: none"> <li>● at 24 V</li> <li>● at 110 V</li> <li>● at 125 V</li> <li>● at 230 V</li> <li>● at 250 V</li> </ul>	<ul style="list-style-type: none"> <li>1 A</li> <li>0.2 A</li> <li>0.2 A</li> <li>0.1 A</li> <li>0.1 A</li> </ul>
<b>operational current at 17 V minimum</b>	5 mA
<b>continuous current of the DIAZED fuse link of the output relay</b>	6 A
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	class A
<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>● due to burst according to IEC 61000-4-4</li> <li>● due to conductor-earth surge according to IEC 61000-4-5</li> <li>● due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	<ul style="list-style-type: none"> <li>2 kV (power ports), 2 kV (signal ports)</li> <li>2 kV</li> <li>1 kV</li> </ul>
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>design of the electrical isolation</b>	galvanic isolation
<b>galvanic isolation</b>	
<ul style="list-style-type: none"> <li>● between input and output</li> <li>● between the outputs</li> <li>● between the voltage supply and other circuits</li> </ul>	<ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> </ul>
<b>Electrical Safety</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>Connections/ Terminals</b>	
<b>product component removable terminal for main circuit</b>	Yes
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	screw terminal
<b>design of terminals with cross-head screw</b>	PZ 1
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>● solid</li> <li>● finely stranded with core end processing</li> <li>● for AWG cables solid</li> </ul>	<ul style="list-style-type: none"> <li>1x (0.5 ... 4 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)</li> <li>1x (0.5 ... 4 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)</li> <li>1x (20 ... 12), 2x (20 ... 14)</li> </ul>
<b>connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>● solid</li> <li>● finely stranded with core end processing</li> </ul>	<ul style="list-style-type: none"> <li>0.5 ... 4 mm<sup>2</sup></li> <li>0.5 ... 4 mm<sup>2</sup></li> </ul>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>● solid</li> <li>● stranded</li> </ul>	<ul style="list-style-type: none"> <li>20 ... 12</li> <li>20 ... 12</li> </ul>
tightening torque with screw-type terminals	0.6 ... 0.8 N·m
<b>stripped length</b>	10 mm
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail
<b>height</b>	100 mm
<b>width</b>	22.5 mm
<b>depth</b>	90 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>● with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>● for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>0 mm</li> </ul>

— at the side	0 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity during operation maximum	70 %

Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	18 kg
global warming potential [CO2 eq] during manufacturing	5.65 kg
global warming potential [CO2 eq] during operation	12.3 kg
global warming potential [CO2 eq] after end of life	-0.03 kg

Approvals Certificates			
General Product Approval	EMV	Test Certificates	other



[Type Test Certificates/Test Report](#)

[Confirmation](#)

other	Environment
-------	-------------



Siemens EcoTech



[Environmental Confirmations](#)

### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG5514-1BR20>

**Cax online generator**



<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=3UG5514-1BR20>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3UG5514-1BR20>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG5514-1BR20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG5514-1BR20&lang=en)

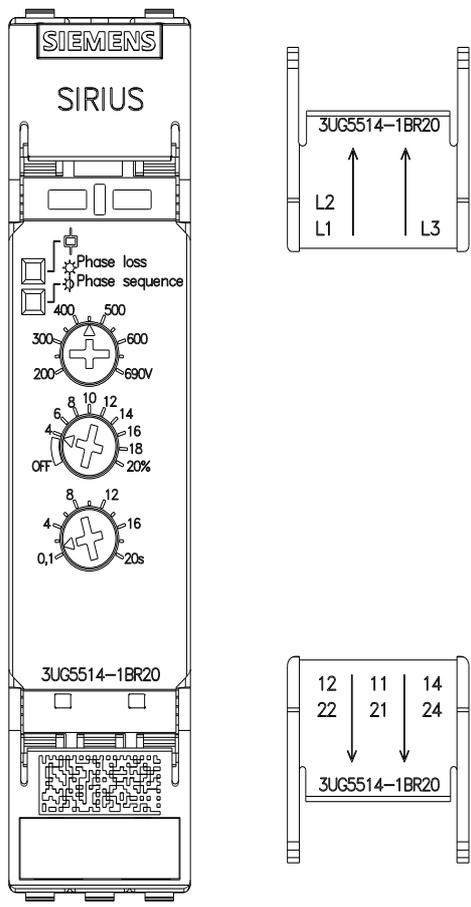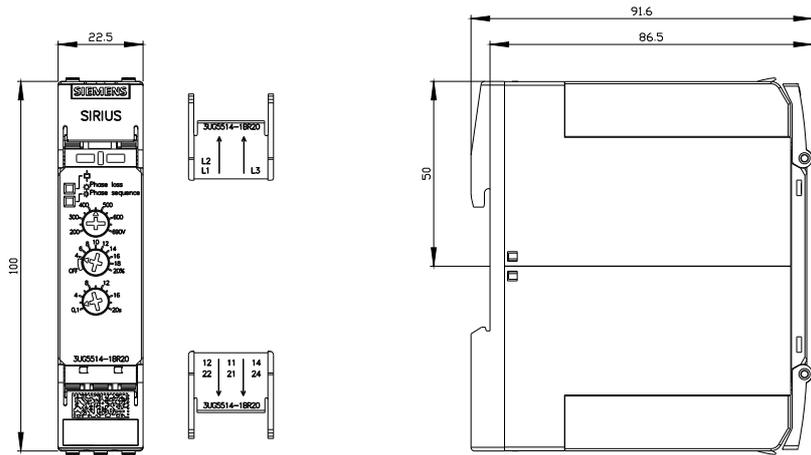

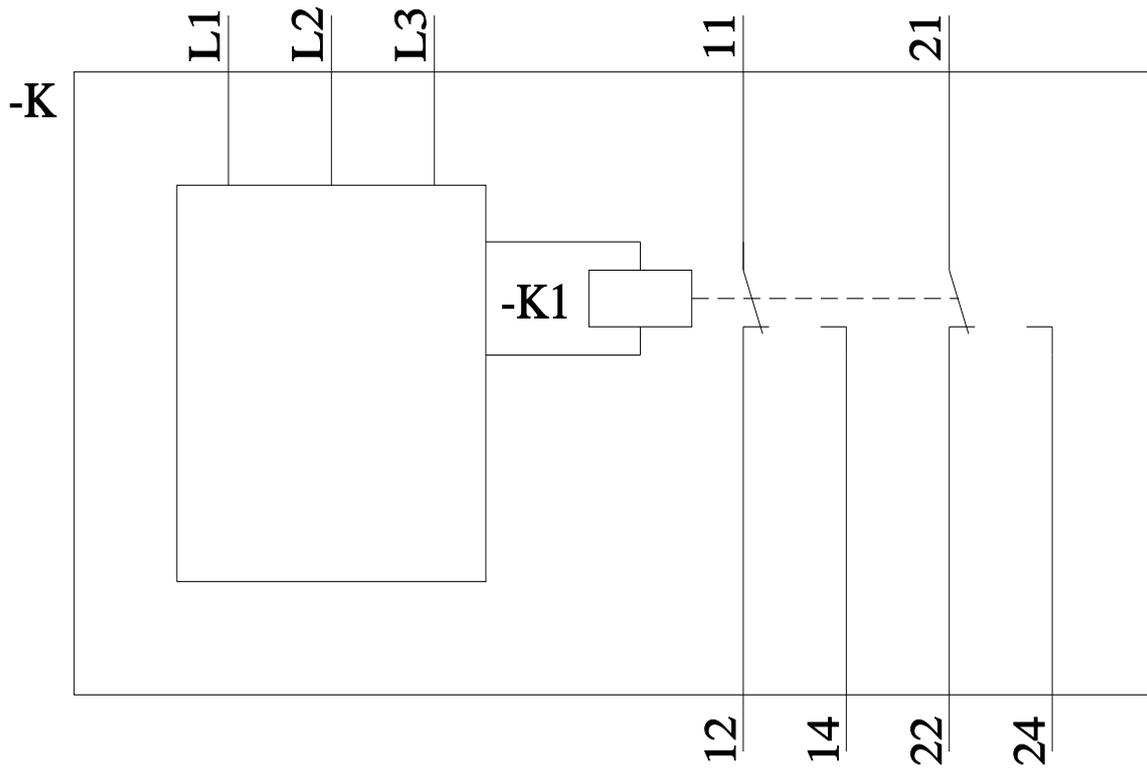

last modified:

9/5/2025 