



Timing relay, electronic ON delay 1 change-over contact, 1 time range 5...100 s 24 V/230 V AC and 24 V DC with LED, Screw terminal

| | |
|---|---|
| product brand name | SIRIUS |
| product designation | timing relay |
| design of the product | slow-operating |
| product type designation | 7PV15 |
| General technical data | |
| product component semi-conductor output | No |
| product extension required remote control | No |
| product extension optional remote control | No |
| power loss [W] maximum | 2 W |
| insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value | 300 V |
| test voltage for isolation test | 2.2 kV |
| degree of pollution | 2 |
| surge voltage resistance rated value | 4 000 V |
| test voltage for surge voltage test | 4 800 V |
| shock resistance according to IEC 60068-2-27 | 11g / 15 ms |
| vibration resistance according to IEC 60068-2-6 | 10 ... 55 Hz: 0.35 mm |
| mechanical service life (operating cycles) typical | 10 000 000 |
| electrical endurance (operating cycles) at AC-15 at 230 V typical | 100 000 |
| adjustable time | 5 ... 100 s |
| relative setting accuracy relating to full-scale value | 5 %; +/- |
| minimum ON period | 35 ms |
| recovery time | 500 ms |
| reference code according to IEC 81346-2 | K |
| relative repeat accuracy | 2 %; +/- |
| influence of the surrounding temperature | 2% in complete temperature range for the set duration |
| power supply influence | 2% in complete voltage range for the set duration |
| Substance Prohibitance (Date) | 05/01/2012 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 |
| Weight | 0.066 kg |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage 1 at AC | |
| • at 50 Hz | 200 ... 240 V |
| • at 60 Hz | 200 ... 240 V |
| control supply voltage 2 at AC | |
| • at 50 Hz rated value | 24 V |
| • at 60 Hz rated value | 24 V |
| control supply voltage frequency 1 | 50 ... 60 Hz |

| | |
|---|-----------------|
| control supply voltage 1 at DC rated value | 24 V |
| operating range factor control supply voltage rated value at DC | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value at AC at 50 Hz | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value at AC at 60 Hz | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| Switching Function | |
| switching function | |
| • ON-delay | Yes |
| • ON-delay/instantaneous contact | No |
| • passing make contact | No |
| • passing make contact/instantaneous contact | No |
| • OFF delay | No |
| switching function | |
| • flashing symmetrically with interval start/instantaneous | No |
| • flashing symmetrically with interval start | No |
| • flashing symmetrically with pulse start/instantaneous | No |
| • flashing symmetrically with pulse start | No |
| • flashing asymmetrically with interval start | No |
| • flashing asymmetrically with pulse start | No |
| switching function | |
| • star-delta circuit with delay time | No |
| • star-delta circuit | No |
| switching function with control signal | |
| • additive ON-delay | No |
| • passing break contact | No |
| • passing break contact/instantaneous | No |
| • OFF delay | No |
| • OFF delay/instantaneous | No |
| • pulse delayed | No |
| • pulse delayed/instantaneous | No |
| • pulse-shaping | No |
| • pulse-shaping/instantaneous | No |
| • additive ON-delay/instantaneous | No |
| • ON-delay/OFF-delay | No |
| • ON-delay/OFF-delay/instantaneous | No |
| • passing make contact | No |
| • passing make contact/instantaneous contact | No |
| switching function of interval relay with control signal | |
| • retrotriggerable with deactivated control signal/instantaneous contact | No |
| • retrotriggerable with switched-on control signal | No |
| • retrotriggerable with switched-on control signal/instantaneous contact | No |
| • retriggerable with deactivated control signal | No |
| design of the control terminal non-floating | No |
| Short-circuit protection | |
| design of the fuse link for short-circuit protection of the auxiliary switch required | fuse gL/gG: 4 A |
| Auxiliary circuit | |
| material of switching contacts | AgSnO2 |
| number of NC contacts | |
| • delayed switching | 0 |
| • instantaneous contact | 0 |
| number of NO contacts | |

| | |
|---|--|
| <ul style="list-style-type: none"> • delayed switching • instantaneous contact | 0 |
| number of CO contacts | |
| <ul style="list-style-type: none"> • delayed switching • instantaneous contact | 1 0 |
| operational current of auxiliary contacts at AC-15 | |
| <ul style="list-style-type: none"> • maximum • at 24 V • at 250 V | 3 A 3 A 3 A |
| operational current of auxiliary contacts as NC contact at AC-15 | |
| <ul style="list-style-type: none"> • at 24 V • at 250 V | 3 A 3 A |
| operational current of auxiliary contacts as NO contact at AC-15 | |
| <ul style="list-style-type: none"> • at 24 V • at 250 V | 3 A 3 A |
| operational current of auxiliary contacts at DC-13 | 1 ... 0.01 |
| operational current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V • at 125 V • at 250 V | 1 A 0.22 A 0.1 A |
| operating frequency with 3RT2 contactor maximum | 5 000 1/h |
| contact reliability of auxiliary contacts | one incorrect switching operation of 100 million switching operations (17 V, 5 mA) |
| contact rating of auxiliary contacts according to UL | R150 / B300 |
| switching capacity current with inductive load | 0.01 ... 3 A |
| Inputs/ Outputs | |
| product function | |
| <ul style="list-style-type: none"> • at the relay outputs switchover delayed/without delay • non-volatile | No No |
| Electromagnetic compatibility | |
| EMC immunity according to IEC 61812-1 | EN 61000-6-2 |
| conducted interference | |
| <ul style="list-style-type: none"> • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 | 2 kV network connection / 1 kV control connection 2 kV 1 kV |
| field-based interference according to IEC 61000-4-3 | 10 V/m |
| electrostatic discharge according to IEC 61000-4-2 | 4 kV contact discharge / 8 kV air discharge |
| Safety related data | |
| category according to EN 954-1 | none |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| type of insulation | Basic insulation |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | No |
| type of electrical connection for auxiliary and control circuit | screw-type terminals |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid • for AWG cables stranded | 1x (0.2 ... 2.5 mm ²) 1x (0.25 ... 1.5 mm ²) 1x (0.2 ... 1.5 mm ²) 1x (24 ... 14) 1x (24 ... 14) |
| connectable conductor cross-section | |
| <ul style="list-style-type: none"> • solid • finely stranded with core end processing • finely stranded without core end processing | 0.2 ... 2.5 m ² 0.25 ... 1.5 m ² 0.2 ... 1.5 m ² |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> • solid | 24 ... 14 |

- stranded

24 ... 14

Installation/ mounting/ dimensions

| | |
|------------------------------|-------------------------------------|
| mounting position | any |
| fastening method | snap-on fastening on 35 mm DIN rail |
| height | 90 mm |
| width | 17.5 mm |
| depth | 66.7 mm |
| required spacing | |
| • with side-by-side mounting | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 0 mm |
| — downwards | 0 mm |
| — at the side | 0 mm |
| • for grounded parts | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 0 mm |
| — at the side | 0 mm |
| — downwards | 0 mm |
| • for live parts | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 0 mm |
| — downwards | 0 mm |
| — at the side | 0 mm |

Ambient conditions

| | |
|---|----------------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +55 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| relative humidity during operation | 15 ... 85 % |

Environmental footprint

| | |
|--|-----------|
| Environmental Product Declaration (EPD) | Yes |
| global warming potential [CO2 eq] total | 22.4 kg |
| global warming potential [CO2 eq] during manufacturing | 1.34 kg |
| global warming potential [CO2 eq] during operation | 21.2 kg |
| global warming potential [CO2 eq] after end of life | -0.156 kg |

Approvals Certificates

| | |
|--------------------------|-----|
| General Product Approval | EMV |
|--------------------------|-----|



| | | | |
|-----|-------------------|-------|-------------|
| EMV | Test Certificates | other | Environment |
|-----|-------------------|-------|-------------|

[KC](#)

[Type Test Certificates/Test Report](#)



[Confirmation](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7PV1513-1AP30>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=7PV1513-1AP30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/7PV1513-1AP30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=7PV1513-1AP30&lang=en

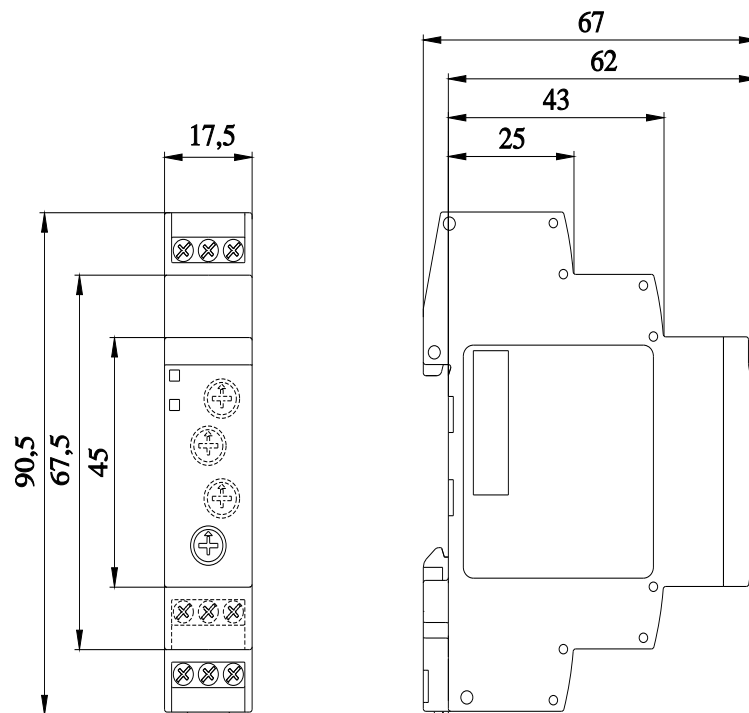

Alle Bemessungswerte sind in Millimeter (mm) angegeben
All dimensions are in millimeters (mm)

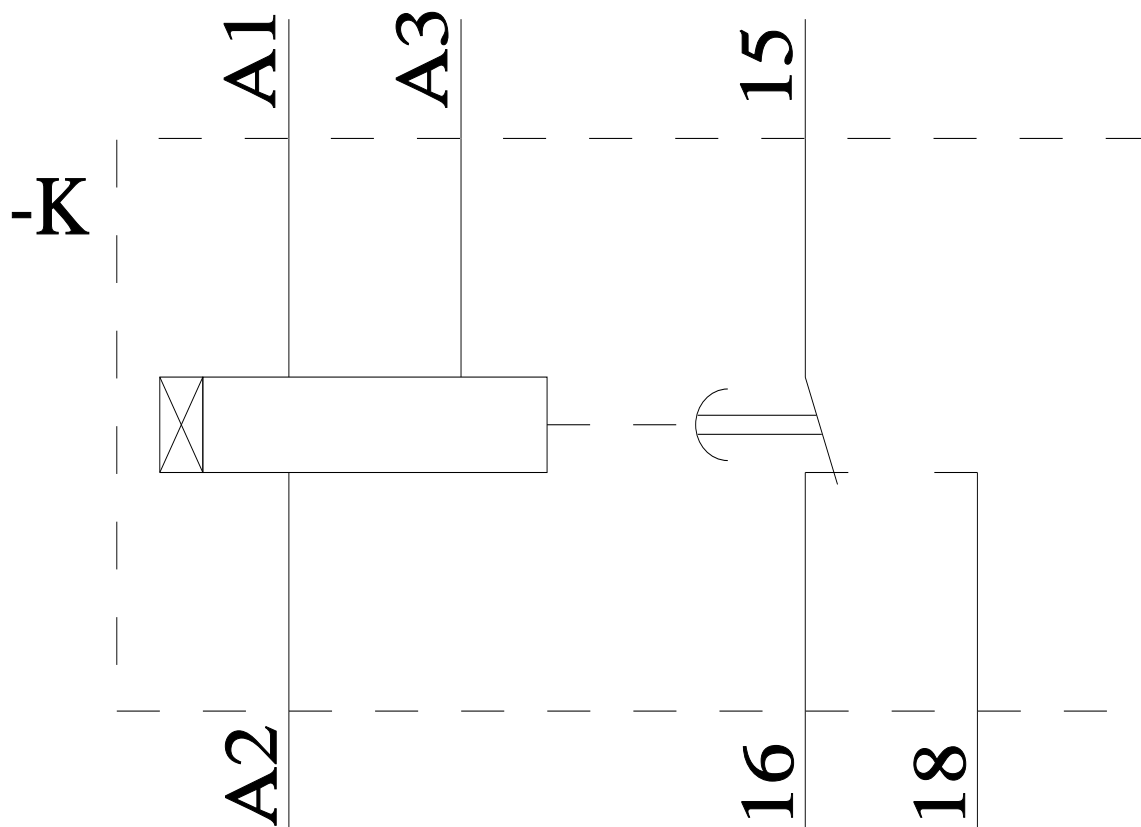

last modified:

4/1/2025 