

Switch disconnecter 125A 2 pole

Model			
design of the switching function		on-off switch	
General technical data			
number of poles		2	
short-circuit current rating		10 kA	
type of voltage of the operating voltage		AC	
Supply voltage			
operating voltage rated value		415 V	
value range of the operating frequency		60	
Protection class			
protection class IP		other	
Main circuit			
operational current rated value		125 A	
Product details			
product component signal lamp		No	
number of NO contacts		2	
Product function			
product function positive opening (acc. to DIN VDE 0113)		No	
connectable conductor cross-section for flexible conductor with core end processing			
• minimum	4 mm²		
• maximum	50 mm²		
connectable conductor cross-section for rigid conductor			
• minimum	4 mm²		
• maximum	50 mm²		
tightening torque with screw-type terminals			
• minimum	2.5 N·m		
• maximum	3 N·m		
Mechanical Design			
height		84 mm	
depth		72.5 mm	
installation depth		76.4 mm	
number of modular width units		2	
net weight		169 g	
ambient temperature during operation			
• minimum	-5 °C		
• maximum	55 °C		
ambient temperature during storage minimum		-25 °C	
Approvals Certificates			
General Product Approval		Test Certificates	other
			Environment

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TE3292-0RC>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TE3292-0RC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE3292-0RC


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

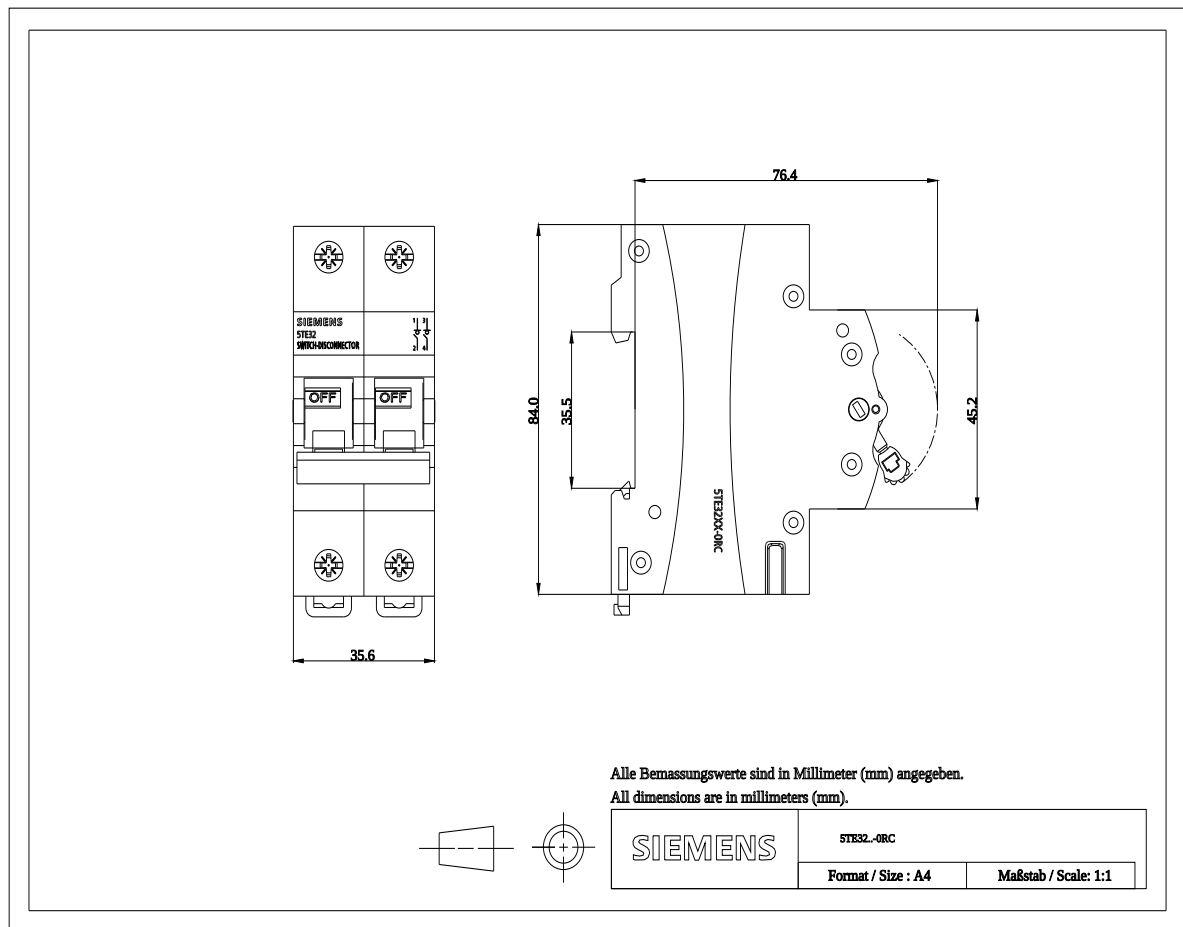

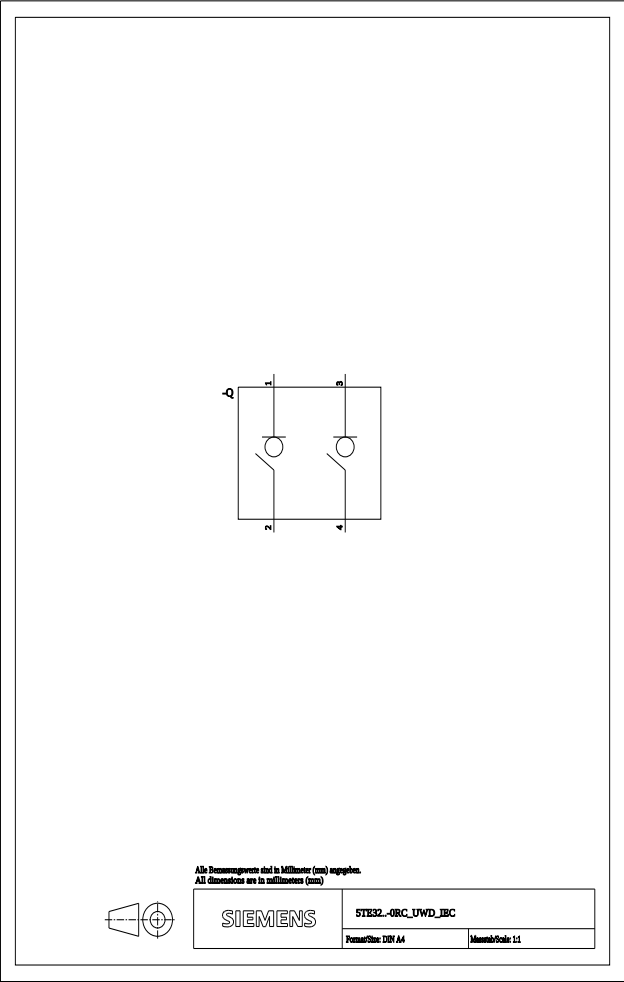

last modified:

12/23/2024

